



# Archer® | K-1949-GHRA

66" x 32" alcove Heated BubbleMassage™ air bath, right drain

## Features

- 120 airjets release thousands of heated bubbles that surround and support the body in a warm massage
- Automatic and manual purge cycles remove residual water from air channels after use
- Variable-speed blower lets you adjust massage intensity to 18 levels
- Comfort Depth® design offers a convenient 19" step-over height while retaining the same depth as a standard 21" bath
- Integral lumbar support
- Slotted overflow allows for deep soaking
- Integral apron
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation
- Textured bottom surface
- Coordinates with other products in the Archer collection
- Built-in 600W BubbleMassage™ heater warms humidified air before it enters the bath
- Automatic and manual purge cycles remove residual water from air channels after use



## Available Colors/Finishes

*Color tiles intended for reference only.*

|    |              |
|----|--------------|
| 0  | White        |
| 96 | Biscuit      |
| 95 | Ice Grey     |
| G9 | Sandbar      |
| 33 | Mexican Sand |
| K4 | Cashmere     |
| 7  | Black Black  |



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
6-18-2026 21:15 - US-CA

THE BOLD LOOK  
OF **KOHLER**

## Codes/Standards

ADA compliant when installed to the specific requirements of these regulations.



ASME A112.19.7/CSA B45.10

CSA B45.5/IAPMO Z124

ASTM E162

ASTM E662

UL 1795

CSA C22.2 No. 218.2

ADA

ICC/ANSI A117.1

cUL Listed

UL Listed

## Technical Information

All product dimensions are nominal.

|                        |                                        |
|------------------------|----------------------------------------|
| Drain Location:        | Right                                  |
| Drain Hole Diameter:   | 2-1/4" (57 mm)                         |
| Minimum Flat for Door: | 2-5/8" (66 mm)                         |
| Basin Area, Bottom:    | 50-3/8" x 19-5/8" (1280 mm x 498 mm)   |
| Basin Area, Top:       | 57-5/16" x 24-1/16" (1456 mm x 611 mm) |
| Water Depth:           | 15-5/16" (389 mm)                      |
| Water Capacity:        | 66 gal (249.8 L)                       |
| Minimum Floor Load:    | 47 lbs/ft²                             |
| Weight:                | 120 lbs (54.4 kg)                      |

## Material

- Acrylic

## Recommended Products/Accessories

K-1446 Remote installation kit for BubbleMassage™ air baths

K-23726 Drain treatment

K-23732 Tub & shower cleaner

## Required Products/Accessories

- K-7271 Slotted overflow brass bath drain

or

- K-7272 Slotted overflow bath drain

## Technology

- Auto-shutoff timer on blower allows users to enjoy Heated BubbleMassage™ experience for 60 minutes before turning off
- User interface: electronic keypad control

## Required Electrical Service

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Blower: 120 V, 15 A, 60 Hz

Heater: 120 V, 15 A, 60 Hz

## Electrical Component Ratings

Blower: 120 V, 10 A

Heater: 120 V, 5 A, 60 Hz

## Warranty

See website for detailed warranty information.

KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty|KOHLER® Hydrotherapy Components Five-Year Limited Warranty




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.



For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

6-18-2026 21:15 - US-CA

No change in measurements  
if connected with drain illustrated. (K-7272)



Integral Flange Detail

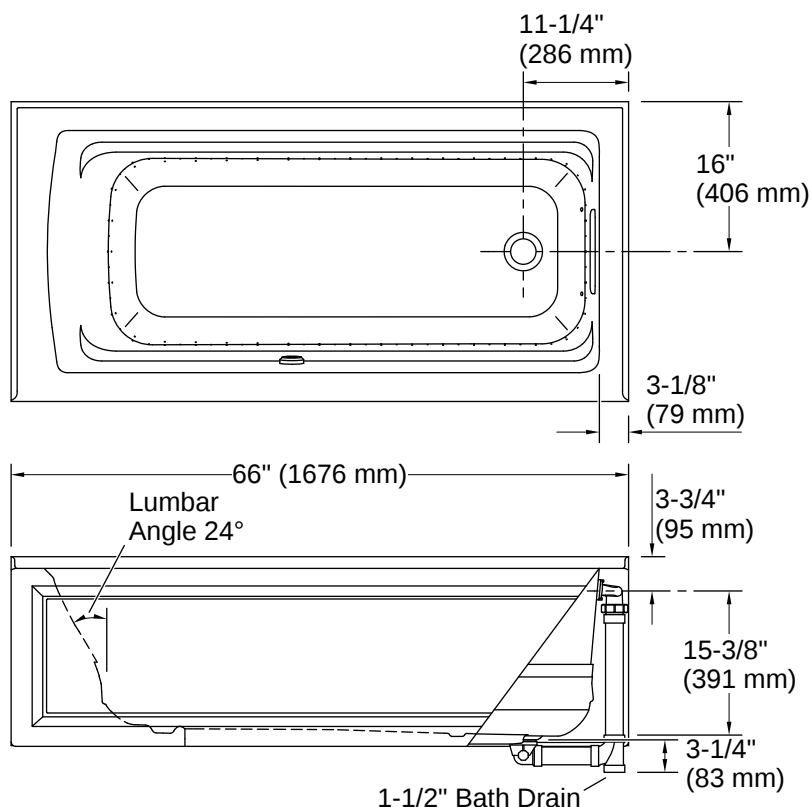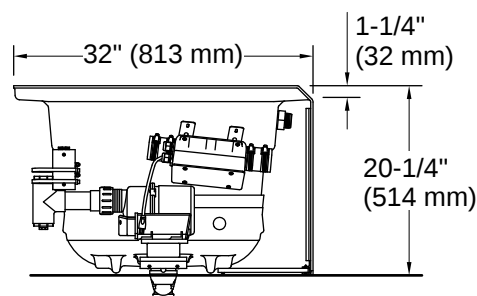

## Installation

- Right drain
- Requires Clearflo slotted overflow bath drain (sold separately)

## Installation Notes

*Install this product according to the installation instructions.*

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Remote blower installation kit is available for relocating the blower.

Provide access for servicing the blower.

Do not relocate or alter the PVC tee or coiled flexible tubing connected to the blower. Follow the blower relocation instructions exactly.

ADA compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

6-18-2026 21:15 - US-CA