



Stillness® Infinity Experience | K-31405-INF

72" x 72" freestanding bath

Features

- Freestanding design creates a striking focal point in your bathing area
- Integral lumbar support
- PerfectFill™ technology conveniently fills the bathtub; no bath faucet or filler necessary
- Integrated drain and overflow
- Water overflows onto the Japanese Hinoki wood moat grate, creating a unique infinity pool effect, while maintaining temperatures up to 104°F (40°C)
- Experience tower creates a sensory experience with programmable light, fog, and aroma settings
- Three stainless steel aroma wells allow essential oils to be infused into the fog for a customized aromatherapy experience
- Chromatherapy lighting encourages your mind and body to relax as a full spectrum of color washes over you
- AutoFill feature closes drain and fills bath to desired level and temperature; no monitoring necessary
- Drain can be operated via remote
- Remote control
- Integrated and surround LED lighting feature delivers preloaded ambient lighting themes



Available Colors/Finishes

Color tiles intended for reference only.

■ HW1 Honed White



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
6-18-2026 21:9 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ASME A112.19.7/CSA B45.10
 CSA B45.5/IAPMO Z124
 ASTM E162
 ASTM E662
 UL 1795
 CSA C22.2 No. 218.2
 cUL Listed
 UL Listed

Technical Information

All product dimensions are nominal.

Lighting Included:	Yes
Drain Location:	Center
Basin Area, Bottom:	38-15/16" x 38-15/16" (988 mm x 988 mm)
Basin Area, Top:	39-7/8" x 39-7/8" (1012 mm x 1012 mm)
Water Depth:	26-9/16" (674 mm)
Water Capacity:	155 gal (586.7 L)
Minimum Floor Load:	70 lbs/ft ²
Weight:	662 lbs (300.3 kg)

Material

- Acrylic
- Japanese Hinoki wood

Recommended Products/Accessories

K-31408 Moat shroud

Required Electrical Service

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Heater: 220 V, 25 A, 50/60 Hz

Pump, Controller module: 220 V, 10 A, 50/60 Hz

Electrical Component Ratings

Heater, Controller module:

Pump:


Number of Speeds: Three speed

Warranty

See website for detailed warranty information.

KOHLER® Plastic Baths and Shower Bases Lifetime Limited
 Warranty|KOHLER® Hydrotherapy Components Five-Year Limited
 Warranty



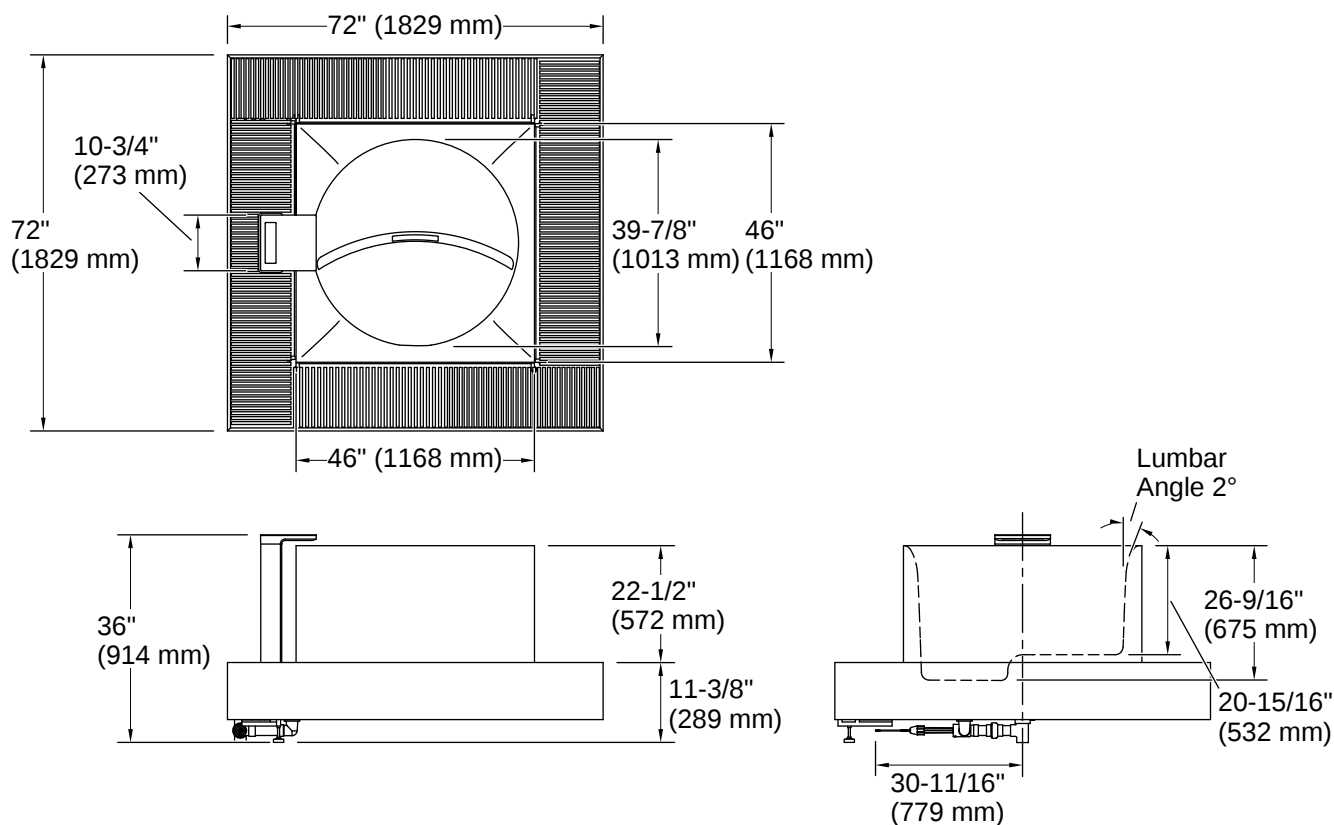

Installation

- Freestanding

Installation Notes

Install this product according to the installation instructions.

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Layout and prep dimensions shown in Installation guide.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

6-18-2026 21:9 - US-CA