



Vault™ | K-32027-1

15" top-/undermount single-bowl bar sink

Features

- 18" (457 mm) minimum base cabinet width
- Single bowl
- 5-1/2" (140 mm) depth
- Single faucet hole
- Sink rack available (sold separately)
- Includes installation hardware



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

NA Stainless Steel



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-12-2026 20:17 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ADA compliant when installed to the specific requirements of these regulations.

ADA permits a parallel approach to wet bars.

ADA

ASME A112.19.3/CSA B45.4

ADA

ICC/ANSI A117.1

Technical Information

All product dimensions are nominal.

Number of Deck Holes:	1
Faucet Hole(s) Size:	1-7/16" (37 mm)
Drain Hole Diameter:	3-3/4" (94 mm)
Minimum Base Cabinet Width:	18" (457 mm)
Basin Configuration:	Single Bowl
Basin Length:	12-1/4" (311 mm)
Basin Width:	9-9/16" (243 mm)
Basin Depth:	5-5/16" (135 mm)

Material

- Premium 18-gauge stainless steel
- KOHLER stainless steel sinks resist corrosion and tarnishing

Recommended Products/Accessories

K-23726 Drain treatment

K-23729 Stainless steel cleaner

K-8801 Sink drain and strainer with tailpiece

K-8799 Sink drain and strainer basket, less tailpiece

K-2993 Stainless steel sink rack, 11-1/2" x 8-15/16"

Warranty

See website for detailed warranty information.

KOHLER® Stainless Steel Sinks Lifetime Limited Warranty





1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 20:17 - US-CA

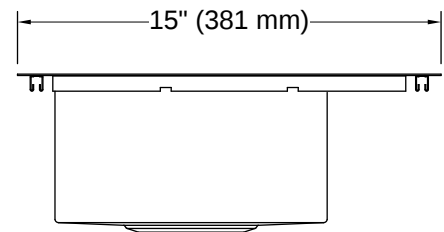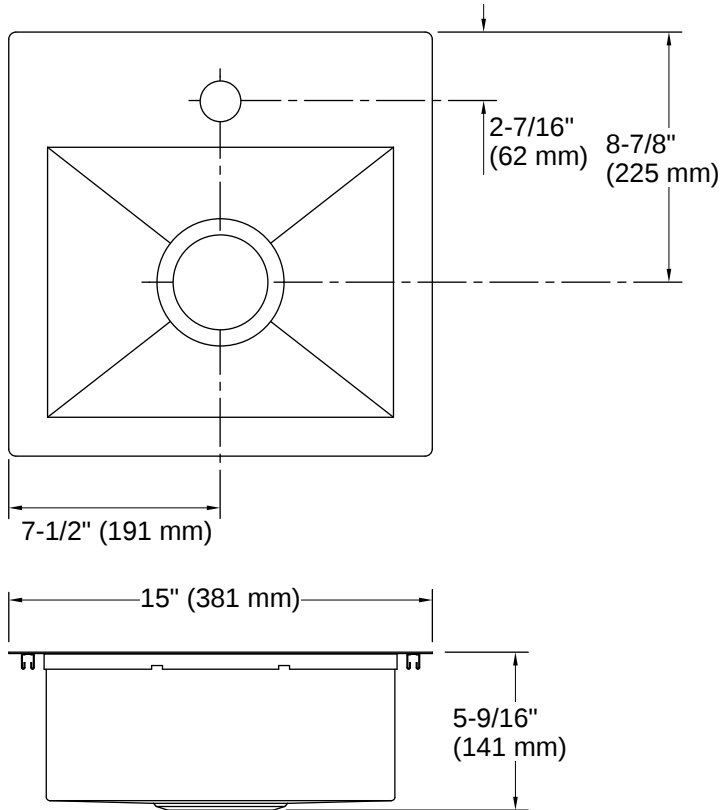

Installation

- Top-mount or undermount
- Center drain

Installation Notes

Install this product according to the installation instructions.

ADA compliant when installed to the specific requirements of these regulations.

