



Vault™ | K-3838-3

Smart Divide® 33" top-/undermount double-bowl kitchen sink

Features

- 36" minimum base cabinet width
- Double-equal bowls
- 9" (229 mm) depth provides generous workspace
- Three faucet holes
- Smart Divide® feature offers a lower bowl divider that increases workspace versatility
- Includes installation hardware



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

 NA Stainless Steel



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-30-2026 21:2 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

ASME A112.19.3/CSA B45.4

Warranty

See website for detailed warranty information.

KOHLER® Stainless Steel Sinks Lifetime Limited Warranty

Technical Information

All product dimensions are nominal.

Number of Deck Holes:	3
Faucet Hole(s) Size:	1-7/16" (37 mm)
Drain Hole Diameter:	3-5/8" (92 mm)
Minimum Base Cabinet Width:	36" (914 mm)
Basin Configuration:	Equal Bowls
Left Basin Length:	14-9/16" (370 mm)
Left Basin Width:	16-9/16" (421 mm)
Left Basin Depth:	9" (229 mm)
Right Basin Length:	14-11/16" (373 mm)
Right Basin Width:	16-9/16" (420 mm)
Right Basin Depth:	9" (229 mm)

Material

- Premium 18-gauge stainless steel

Recommended Products/Accessories

K-23726 Drain treatment

K-23729 Stainless steel cleaner

K-6641 Stainless steel sink rack

K-8801 Sink drain and strainer with tailpiece

K-8799 Sink drain and strainer basket, less tailpiece

K-6429 Utility rack

K-6434 Saddle utility rack

K-6432 Dishcloth bar

K-6667 Wood cutting board

1177161 Installation Clip Kit

K-11352 Disposal flange with stopper




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-30-2026 21:2 - US-CA

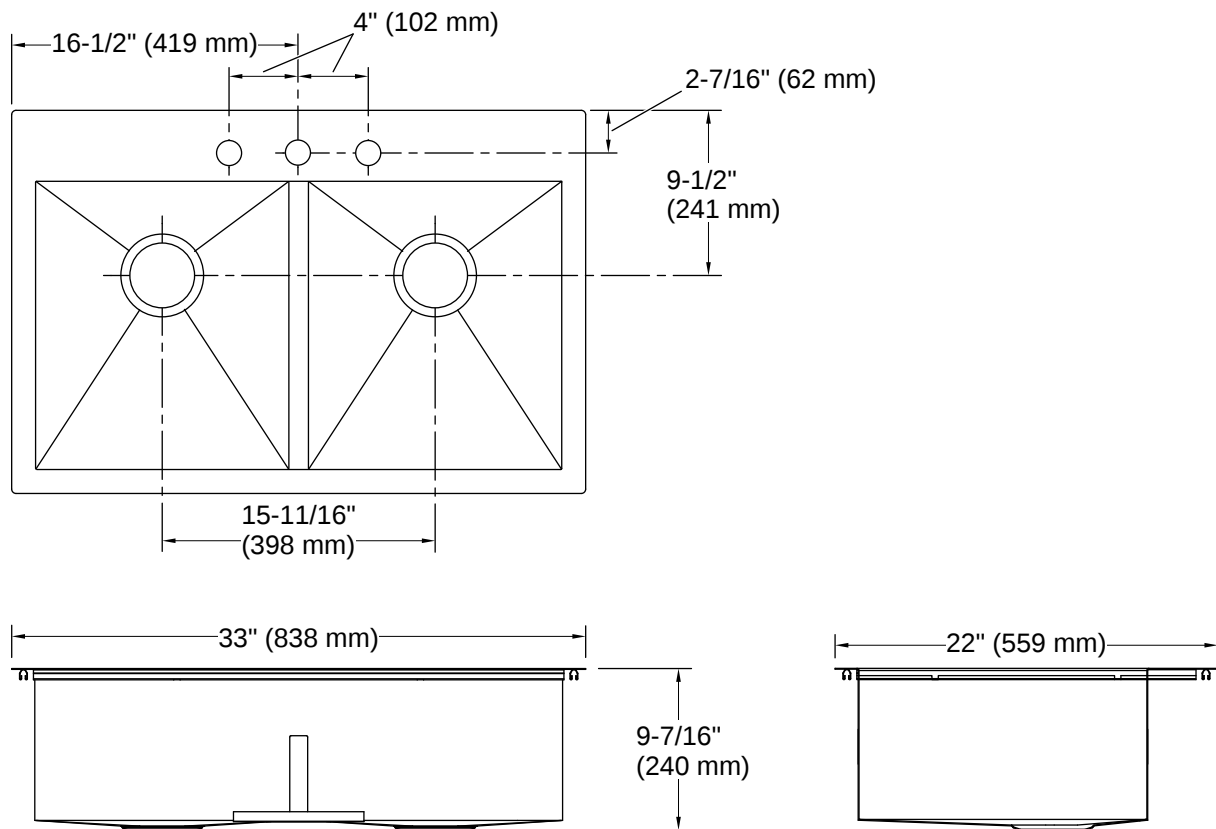

Installation

- Top-mount or undermount

Installation Notes

Install this product according to the installation instructions.

Allow 3/4" (19 mm) clearance beyond the back of the bowl for the wood cutting board (optional accessory).

