



Northland™ | K-6589-U

15" undermount single-bowl bar sink

Features

- 15" (381 mm) minimum base cabinet width
- Single bowl
- 7" depth



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

0	White
FF	Sea Salt
96	Biscuit
NY	Dune
95	Ice Grey
7	Black Black
TRF	Truffle
17	Teal
34	Fresh Green
42	Aspen Green



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
6-17-2026 17:3 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ADA compliant when installed to the specific requirements of these regulations.

ADA permits a parallel approach to wet bars.



ASME A112.19.1/CSA B45.2

ADA

ICC/ANSI A117.1

Technical Information

All product dimensions are nominal.

Drain Hole Diameter:	3-7/8" (98 mm)
Minimum Base Cabinet Width:	15" (381 mm)
Basin Configuration:	Single Bowl
Basin Length:	12" (305 mm)
Basin Width:	9-1/4" (235 mm)
Basin Depth:	7" (178 mm)

Material

- KOHLER® enameled cast iron

Recommended Products/Accessories

K-23726 Drain treatment

K-23725 Cast iron cleaner

K-8801 Sink drain and strainer with tailpiece

K-8799 Sink drain and strainer basket, less tailpiece

Warranty

See website for detailed warranty information.

KOHLER® Enameled Cast Iron Kitchen and Bathroom Sink Lifetime Limited Warranty

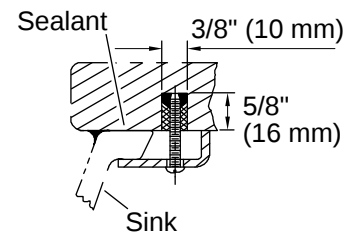
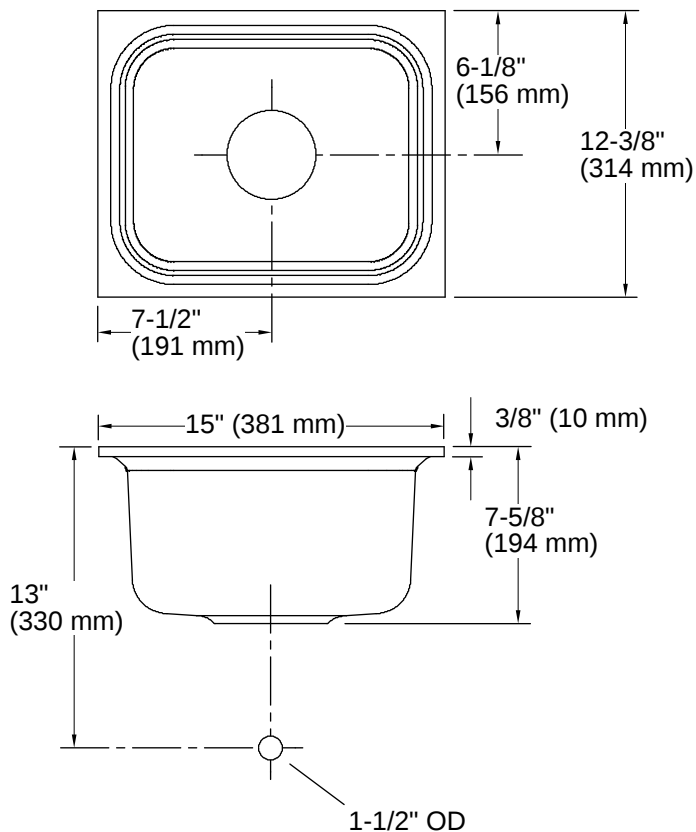



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

6-17-2026 17:3 - US-CA


 Marble Slab
Installation


Note: Waterproof the unprotected overhang area on the underside of a wood counter.

Installation

- Includes undermount installation kit for simplified installation
- Undermount

Installation Notes

Install this product according to the installation instructions.

Supplied bowl clamp assemblies require 1" (25 mm) minimum countertop thickness. Installer must supply anchors for thinner countertops.

For multiple bowl under-mount installations, a minimum distance of 3-3/8" (86 mm) is required between bowls. Countertop supplier to determine required support.

ADA compliant when installed to the specific requirements of these regulations.

ADA permits a parallel approach to wet bars.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

6-17-2026 17:3 - US-CA