



# Levity® | K-706009-D3

56-5/8"-59-5/8" W x 74" H bypass shower door with 1/4"-thick Frosted glass

## Features

- Frameless 1/4" (6 mm) thick frosted tempered glass
- Innovative roller design simplifies installation and provides out-of-plumb adjustability while glass is installed
- Cushioned center guide provides smooth, quiet sliding action
- Vertical blade handles accentuate the contemporary style
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)
- Tempered glass ensures enhanced safety and durability



## Available Colors/Finishes

*Color tiles intended for reference only.*

- |                                                                                     |     |                               |
|-------------------------------------------------------------------------------------|-----|-------------------------------|
|  | SH  | Bright Silver                 |
|  | BL  | Matte Black                   |
|  | MX  | Matte Nickel                  |
|  | 2MB | Vibrant Brushed Moderne Brass |
|  | ABZ | Anodized Dark Bronze          |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

6-10-2026 21:3 - US-CA

THE BOLD LOOK  
OF **KOHLER**

---

## Codes/Standards

ANSI Z97.1 (Tempered Glass)  
CAN/CGSB-12.1  
CPSC 16CFR 1201

---

## Technical Information

*All product dimensions are nominal.*

|                                |                     |
|--------------------------------|---------------------|
| Base-To-Wall Radius - Maximum: | 1/2" (13 mm)        |
| Shower Ledge Minimum Flat:     | 2-1/2" (64 mm)      |
| Shower Wall Minimum Flat:      | 3-1/2" (89 mm)      |
| Weight:                        | 111.4 lbs (50.5 kg) |


---

## Warranty

*See website for detailed warranty information.*

KOHLER® Bath and Shower Doors Ten-Year Limited Warranty



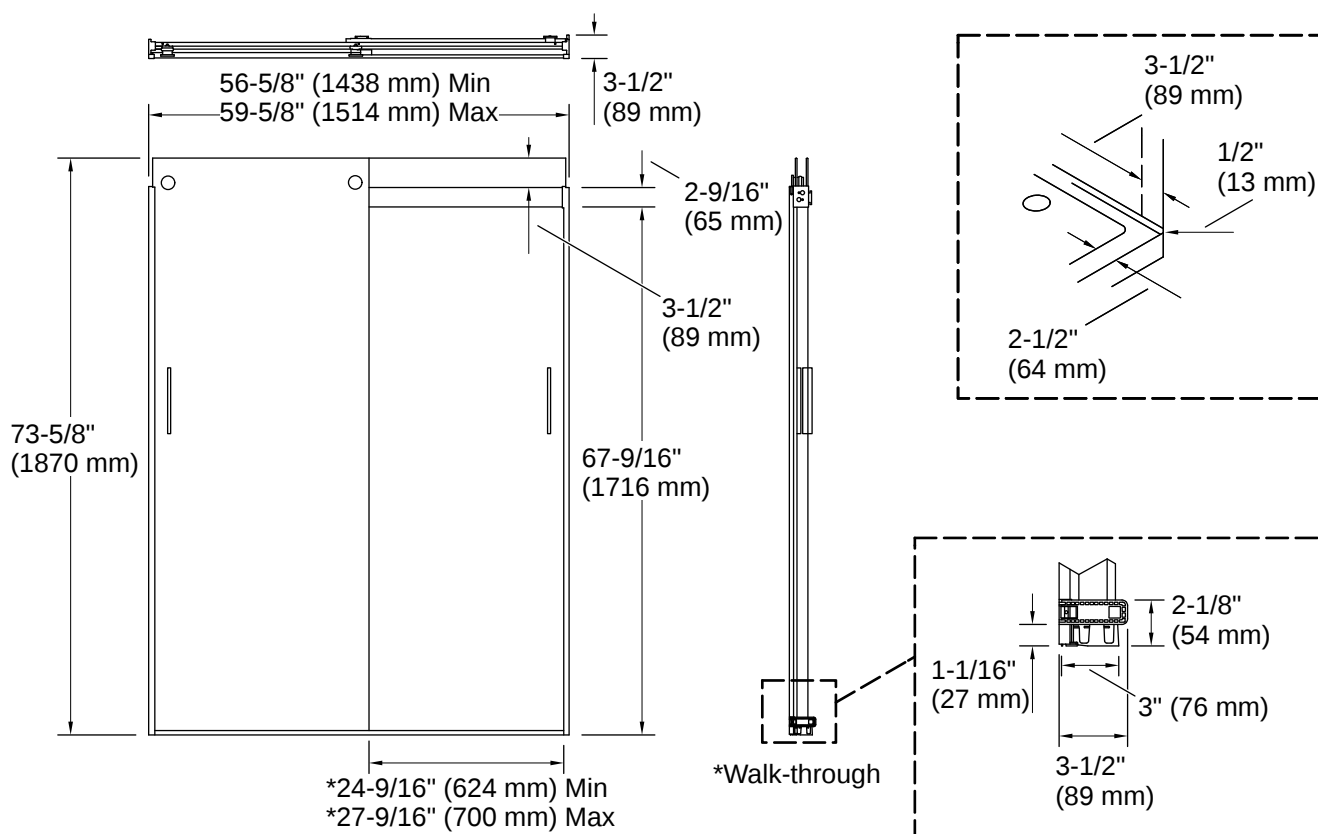

## Installation

- Sliding shower door
- Not for use in hospitality

## Installation Notes

*Install this product according to the installation instructions.*

If replacing a shower door, the narrow wall jamb design of this door may not cover the existing shower door holes.

The vertical opening should be a minimum of 76-1/2" (1943 mm) to allow for installation clearance.

