



Tea-for-Two® | K-855

66" x 36" drop-in/undermount bath

Features

- Spacious design accommodates up to two bathers
- Safeguard® slip-resistant surface provides excellent traction underfoot



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

0	White
96	Biscuit
NY	Dune
95	Ice Grey
58	Thunder Grey
7	Black Black



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-12-2026 22:4 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ASME A112.19.1/CSA B45.2
ASTM F462

Technical Information

All product dimensions are nominal.

Drain Location:	Reversible
Drain Hole Diameter:	2-3/16" (56 mm)
Minimum Flat for Door:	1-15/16" (50 mm)
Basin Area, Bottom:	45" x 25" (1143 mm x 635 mm)
Basin Area, Top:	58" x 29" (1473 mm x 737 mm)
Water Depth:	19-1/2" (495 mm)
Water Capacity:	105 gal (397.5 L)
Minimum Floor Load:	81 lbs/ft ²
Weight:	440 lbs (199.6 kg)
Cutout:	Drop-in, 64-1/2" x 34-1/2" (1638 mm x 876 mm)

Material

- KOHLER® enameled cast iron

Recommended Products/Accessories

K-587 Undermount kit for select 66" Tea-for-Two bath models
K-23726 Drain treatment
K-23725 Cast iron cleaner

Required Products/Accessories

- K-78440 33" cable pop-up bath drain
- K-23857 Bath drain trim


Warranty

See website for detailed warranty information.


KOHLER® Enameled Cast Iron Bath and Shower Base Lifetime
Limited Warranty



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-12-2026 22:4 - US-CA

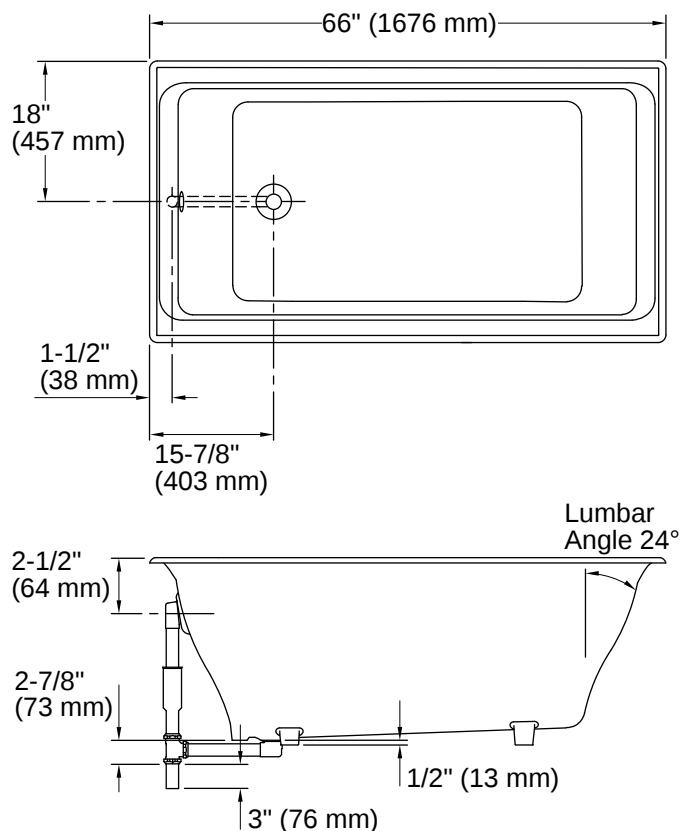

No change in measurements if connected with drain illustrated. (K-7147-AF)

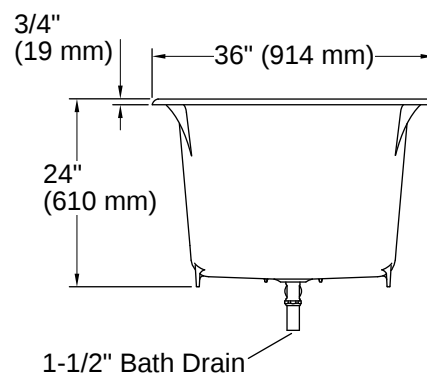

Installation

- Reversible drain
- Drop-in or undermount
- Requires cable pop-up bath drain and bath drain trim (sold separately)

Installation Notes

Install this product according to the installation instructions.

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Kit is required for under-mount installations (sold separately).

