



Tea-for-Two® | K-856-M

66" x 36" drop-in whirlpool bath

Features

- 6 hydromassage jets can be individually adjusted for water flow and direction
- Variable-speed pump for adjusting hydromassage intensity
- 10 backjets target the lower back and shoulders to relieve tension and encourage deep breathing
- Adjustable neckjet pillow with 2 jets provides a stimulating, stress-relieving neck massage
- Built-in heater
- Electronic keypad
- Remote control
- Safeguard® slip-resistant surface provides excellent traction underfoot
- Drilled for grab bars (required); sold separately



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

0	White
96	Biscuit
NY	Dune
95	Ice Grey
58	Thunder Grey
7	Black Black



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
6-18-2026 21:10 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ASME A112.19.1/CSA B45.2
ASME A112.19.7/CSA B45.10
ASTM F462
UL 1795
CSA C22.2 No. 218.2
cUL Listed
UL Listed

Technical Information

All product dimensions are nominal.

Drain Location:	Reversible
Drain Hole Diameter:	2" (51 mm)
Minimum Flat for Door:	1-15/16" (50 mm)
Basin Area, Bottom:	45" x 25" (1143 mm x 635 mm)
Basin Area, Top:	58" x 29" (1473 mm x 737 mm)
Water Depth:	18" (457 mm)
Water Capacity:	96 gal (363.4 L)
Minimum Floor Load:	81 lbs/ft ²
Weight:	510 lbs (231.3 kg)
Cutout:	Drop-in, 65-1/2" x 35-1/2" (1664 mm x 902 mm)

Material

- KOHLER® enameled cast iron

Required Products/Accessories

- K-9653 Grab bars for whirlpool baths with Spa/Massage package
- or
- K-23857 Bath drain trim
- or
- K-78440 33" cable pop-up bath drain

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Pump, Heater: 240 V, 20 A, 50/60 Hz

Electrical Component Ratings

Pump: 240 V, 50/60 Hz
Number of Speeds: Variable
Heater: 240 V, 6 A, 1500 W

Warranty

See website for detailed warranty information.

KOHLER® Enameled Cast Iron Bath and Shower Base Lifetime Limited Warranty|KOHLER® Hydrotherapy Components Five-Year Limited Warranty

Recommended Products/Accessories


K-1601 Bath/whirlpool footstop, removable
K-587 Undermount kit for select 66" Tea-for-Two bath models
K-1179 Tiling-in bead, 180" length
K-23726 Drain treatment
K-9696 Whirlpool trim kit with six jets
K-23725 Cast iron cleaner



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
6-18-2026 21:10 - US-CA

THE BOLD LOOK
OF **KOHLER®**

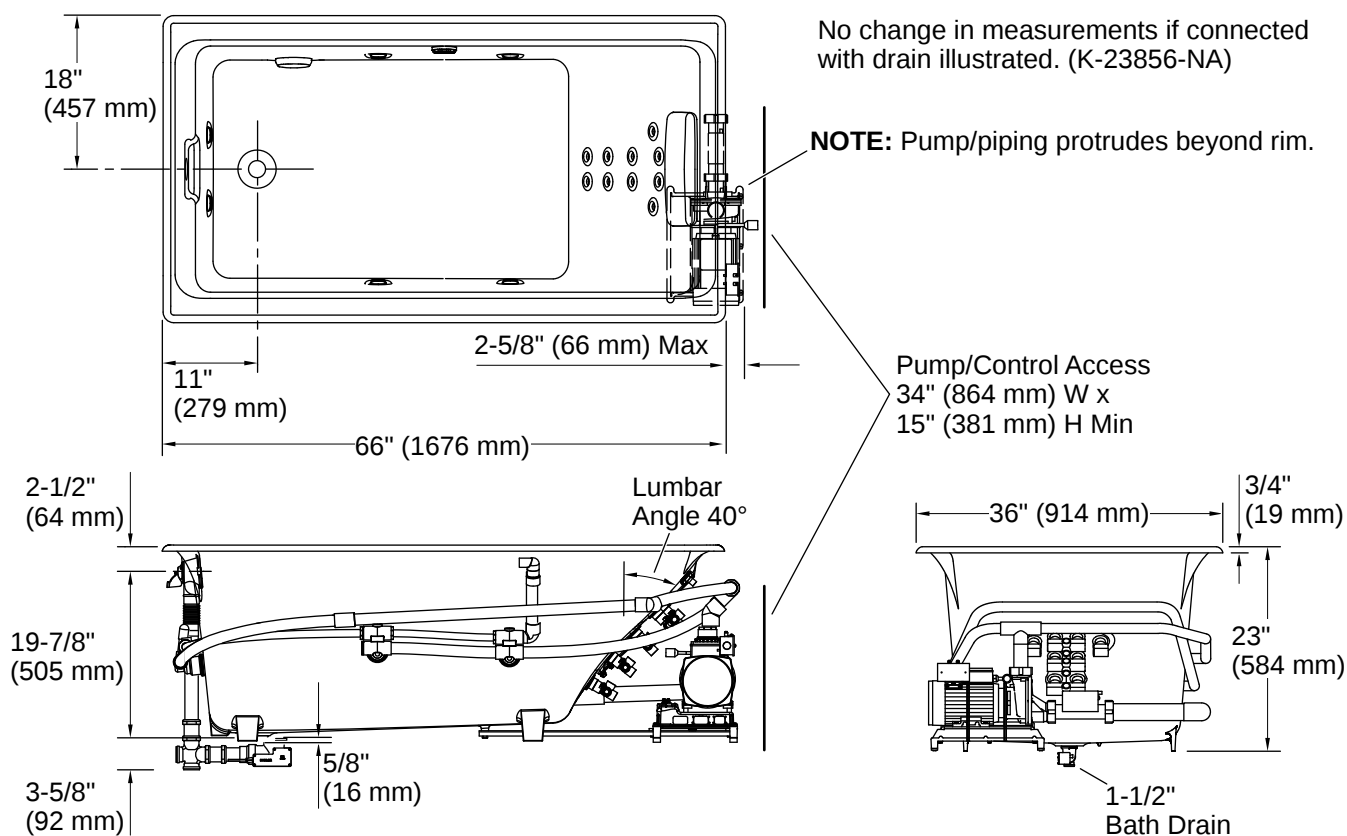

Installation

- Reversible drain
- Drop-in
- Requires cable pop-up bath drain and bath drain trim (sold separately)

Installation Notes

Install this product according to the installation instructions.

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Kit is required for under-mount installations (sold separately).

Cast iron whirlpools are extremely heavy, making some drop-in installations difficult. Splitting the deck/surround is recommended if installing into a deck.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

6-18-2026 21:10 - US-CA