



Bellwether® | K-876

60" x 32" alcove bath, right drain

Features

- 60" (1524 mm) x 32" (813 mm) x 15-1/2" (394 mm)
- 15" apron height for easy entrance and exit
- Safeguard® slip-resistant surface provides excellent traction underfoot
- Integral apron
- Integral lumbar support



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|----|---------|
| 0 | White |
| 96 | Biscuit |



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-12-2026 22:14 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ADA compliant when installed to the specific requirements of these regulations.



ASME A112.19.1/CSA B45.2
 ASTM F462
 ADA
 ICC/ANSI A117.1

Technical Information

All product dimensions are nominal.

Drain Location:	Right
Drain Hole Diameter:	2-1/4" (57 mm)
Minimum Flat for Door:	2-1/2" (63 mm)
Basin Area, Bottom:	43-7/8" x 21" (1114 mm x 533 mm)
Basin Area, Top:	51-1/4" x 23-5/16" (1302 mm x 592 mm)
Water Depth:	11-5/16" (287 mm)
Water Capacity:	44 gal (166.6 L)
Minimum Floor Load:	52 lbs/ft ²
Weight:	327 lbs (148.3 kg)

Material

- KOHLER® enameled cast iron

Recommended Products/Accessories

- K-1601 Bath/whirlpool footstop, removable
- K-23726 Drain treatment
- K-706007-L Sliding bath door, 62" H x 56-5/8 - 59-5/8" W, with 3/8" thick Crystal Clear glass
- K-23725 Cast iron cleaner
- K-14426 Wall-mount bath spout
- K-14427 Wall-mount bath spout
- K-706000-D3 Sliding bath door, 62" H x 56-5/8 - 59-5/8" W, with 1/4" thick Frosted glass
- K-706000-L 62" H sliding bath door with 1/4"-thick glass
- K-706003-L Sliding bath door, 62" H x 56-5/8 - 59-5/8" W, with 3/8" thick Crystal Clear glass
- K-706004-D3 Sliding bath door, 62" H x 56-5/8 - 59-5/8" W, with 1/4" thick Frosted glass
- K-706004-L Sliding bath door, 62" H x 56-5/8 - 59-5/8" W, with 1/4" thick Crystal Clear glass

Required Products/Accessories

- K-7259 Brass toe tap bath drain


Warranty

See website for detailed warranty information.



KOHLER® Enameled Cast Iron Bath and Shower Base Lifetime Limited Warranty



No change in measurements if connected with drain illustrated. (K-37383)

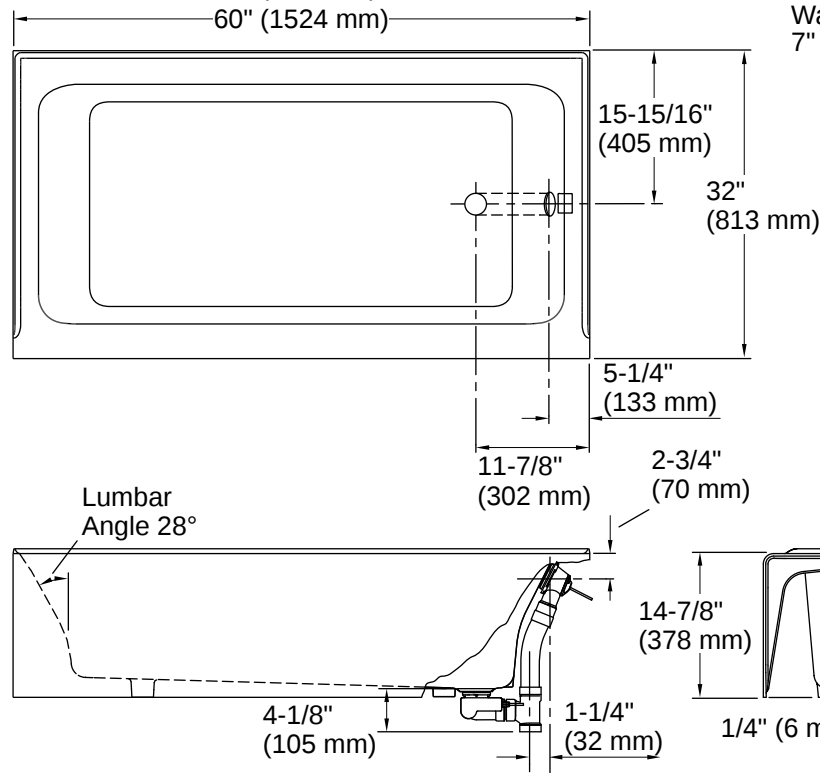

Note: To clear the bath rim end wall, a minimum 7" (178 mm) bath spout is recommended. Water flow from angled bath spouts less than 7" (178 mm) may also provide needed clearance.

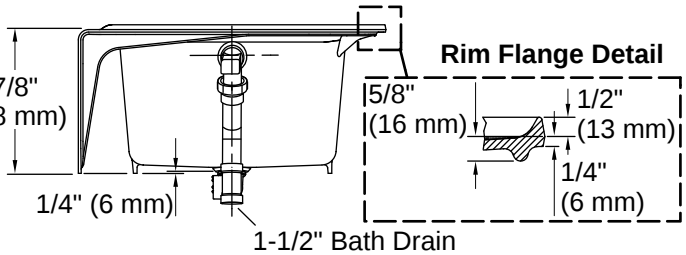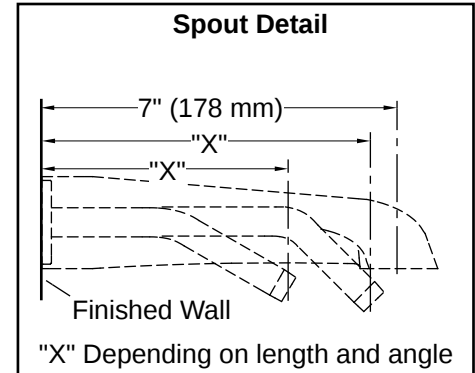

Installation

- Alcove
- Integral flange

Installation Notes

Install this product according to the installation instructions.

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 22:14 - US-CA