



Rêve® | K-892

67" x 36" drop-in bath

Features

- Comfort Depth® design offers a convenient and low step-over height while retaining the depth of a standard 21" bath
- Integral lumbar support on both ends
- Slotted overflow allows for deep soaking
- Safeguard® slip-resistant surface provides excellent traction underfoot
- Coordinates with other products in the Rêve collection



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

0 White



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-12-2026 22:14 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ASME A112.19.1/CSA B45.2
ASTM F462

Warranty

See website for detailed warranty information.

KOHLER® Enameled Cast Iron Bath and Shower Base Lifetime Limited Warranty

Technical Information

All product dimensions are nominal.

Drain Location:	Center
Drain Hole Diameter:	2-3/16" (56 mm)
Minimum Flat for Door:	1" (25 mm)
Basin Area, Bottom:	49" x 26-1/2" (1245 mm x 673 mm)
Basin Area, Top:	62-1/2" x 29-1/4" (1588 mm x 743 mm)
Water Depth:	15-1/4" (387 mm)
Water Capacity:	90 gal (340.7 L)
Minimum Floor Load:	78 lbs/ft²
Weight:	435 lbs (197.3 kg)
Cutout:	Drop-in, 66-1/2" x 35-1/2" (1689 mm x 902 mm)

Material

- KOHLER® enameled cast iron
- Painted exterior surface smoothness can vary from product to product

Recommended Products/Accessories


K-137 Undermount kit for select 67" Rêve bath models
K-1179 Tiling-in bead, 180" length
K-23726 Drain treatment
K-23725 Cast iron cleaner

Required Products/Accessories

- K-7271 Slotted overflow brass bath drain
- or
- K-7272 Slotted overflow bath drain



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
5-12-2026 22:14 - US-CA

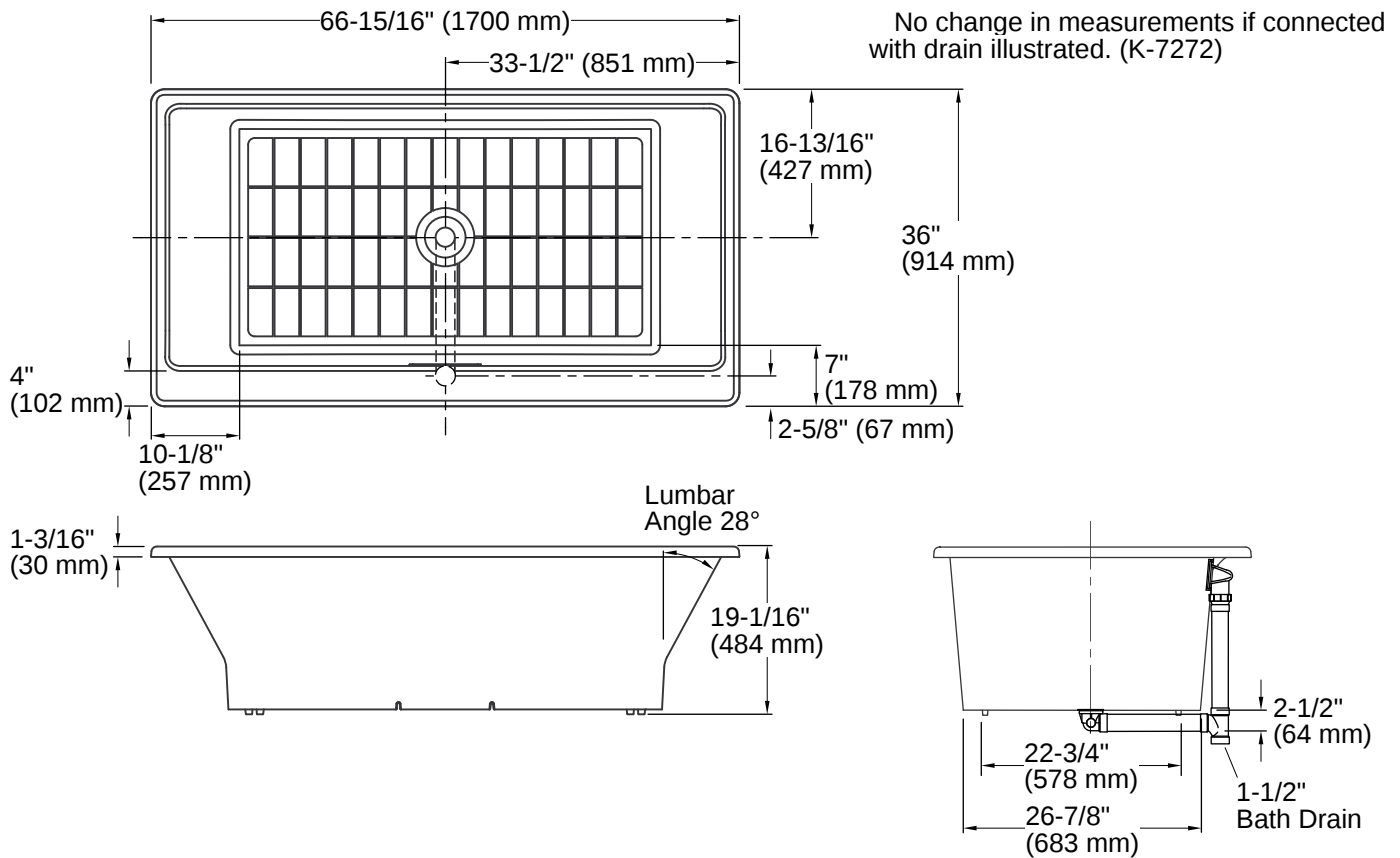

Installation

- Center drain
- Drop-in or undermount
- Requires Clearflo slotted overflow bath drain and PVC pipe (sold separately)

Installation Notes

Install this product according to the installation instructions.

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Kit is required for under-mount installations (sold separately).

To clear the overflow side bath rim, a minimum 7" (178 mm) bath spout is recommended.

To clear the end wall bath rim, a minimum 10" (254 mm) bath spout is recommended.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

5-12-2026 22:14 - US-CA