

OPS-3636 TRANSFER SHOWER ANSI COMPLIANT

SUBMITTAL SHEET

ANSI-ICC A117.1-2009

FHA, CSA B45.5-11 / IAPMO Z124-2011, HUD UM 73a, ASTM F-462

TO COMPLETE YOUR ORDER, THIS DOCUMENT MUST BE SIGNED AND FAXED TO MAAX ORDER DESK FAX: 1-800-527-3368 • PHONE: 1-800-523-4093

DATE:		JOB NAME:	
CUSTOMER:		QUOTE#:	
SHIP TO:			
P.O. #:		PHONE:	
QUANTITY:		SPECIAL NOTES:	
	/ /		/ /
PLUMBING CONTRACTOR APPROVAL	DATE	GENERAL CONTRACTOR APPROVAL	DATE
	/ /		/ /
ENGINEER APPROVAL	DATE	ARCHITECT APPROVAL	DATE

IMPORTANT NOTES:

- 1. MAAX assumes no responsibility for final code compliance. Information and specifications taken from this document must be confirmed with appropriate
- 2. Units are code compliant when fully equipped and installed according to guidelines.
- 3. Due to possible water leaks between the threshold of the shower and the curtain, MAAX recommends the installation of a floor drain outside the unit.

INTERIOR DIMENSIONS	36" L x 36" W x 76 %" H
EXTERIOR DIMENSIONS	38 ¾" L x 39" W x 78 ¾" H
SKIRT HEIGHT	1 1/8"
THRESHOLD HEIGHT	1/2"
WEIGHT	162 LBS
MATERIAL	FIBERGLASS
WARRANTY	5 YEARS

(106033-R/L)



STANDARD FEATURES

- 1-piece transfer shower
- Reinforced according to Fair Housing Act accessibility requirements
- Center drain
- Textured bottom
- Available in standard and non-standard colors

COMPLIANT PACKAGE

Fully equipped - ANSI compliant

Base model with complete ANSI package

- 1 x Horizontal L-shaped 34 3/8" x 18" textured stainless steel grab bar
- 1 x Vertical 18" straight textured stainless steel grab bar
- L-Shaped fold-up Phenolic white seat
- Chrome pressure balance mixing valve with hand-held shower
- Chrome 24" slide bar & 60" flexible hose

Speci	ify co	lors


Specify colors
White Bone Biscuit
Non-standard color:
Options
36" Chrome curtain rod (factory-installed)
Chrome recessed soap dish (drilled, not installed)
Accessories (sold separately)
Solid Brass drain with Chrome plated stainless steel grid
36" white vinyl shower curtain with stainless steel hooks

SUBMITTAL SHEET


ANSI-ICC A117.1-2009

FHA. CSA B45.5-11 / IAPMO Z124-2011. HUD UM 73a. ASTM F-462


TO COMPLETE YOUR ORDER, THIS DOCUMENT MUST BE SIGNED AND FAXED TO MAAX ORDER DESK FAX: 1-800-527-3368 • PHONE: 1-800-523-4093

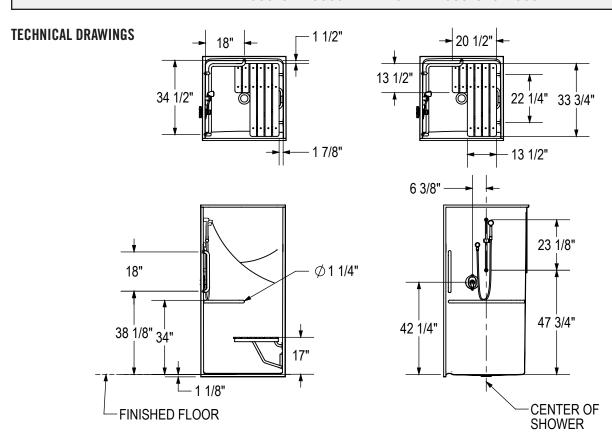

DAM PROFILE

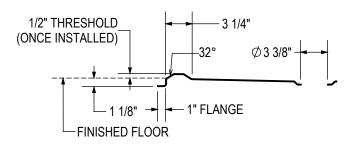

FRAMING DIMENSIONS



Model	А	В	С	D	Е
106033	38 3/4	39	38	19 1/2	19 3/8

MINIMUM CLEARANCE

SHOWER 36" X 36"		
ANSI		
F	48"	
G	36"	

Clearance zone from the control wall and adjacent to the open face

