

OPS-3636-RS TRANSFER SHOWER

ADA COMPLIANT

SUBMITTAL SHEET

ADA STANDARDS FOR ACCESSIBLE DESIGN FHA. CSA B45.5-11 / IAPMO Z124-2011. HUD UM 73a. ASTM F-462

TO COMPLETE YOUR ORDER, THIS DOCUMENT MUST BE SIGNED AND FAXED TO AKER ORDER DESK FAX: 1-800-527-3368 • PHONE: 1-800-523-4093

DATE:		JOB NAME:	
CUSTOMER:		QUOTE#:	
SHIP TO:			
P.O. #:		PHONE:	
QUANTITY:		SPECIAL NOTES:	
	/ /		1 1
PLUMBING CONTRACTOR APPROVAL	DATE	GENERAL CONTRACTOR APPROVAL	DATE
	/ /		/ /
ENGINEER APPROVAL	DATE	ARCHITECT APPROVAL	DATE

IMPORTANT NOTES:

- 1. MAAX assumes no responsibility for final code compliance. Information and specifications taken from this document must be confirmed with appropriate authorities.
- 2. Units are code compliant when fully equipped and installed according to guidelines.
- 3. Due to possible water leaks between the threshold of the shower and the curtain, MAAX recommends the installation of a floor drain outside the unit.

INTERIOR DIMENSIONS	36" L x 36" W x 76 %" H
EXTERIOR DIMENSIONS	38 ¾" L x 39" W x 78 ¾" H
SKIRT HEIGHT	3/4"
THRESHOLD HEIGHT	1/2"
WEIGHT	162 LB
MATERIAL	FIBERGLASS
WARRANTY	5 YEARS

(106069-R/L)



STANDARD FEATURES

- 1-piece transfer shower
- Reinforced according to Fair Housing Act accessibility requirements
- Center drain
- Textured bottom
- Available in standard and non-standard colors

COMPLIANT PACKAGE

Fully equipped - ADA compliant

Base model with complete ADA package

- 1 x Horizontal L-shaped 34 3/8" x 18" textured stainless steel grab bar
- L-Shaped fold-up Phenolic white seat
- Chrome pressure balance mixing valve with hand-held shower
- Chrome 24" slide bar & 60" flexible hose

S	pecify	CO	lors

Specify colors
White Bone Biscuit
Non-standard color:
Options
36" Chrome curtain rod (factory-installed)
Chrome recessed soap dish (drilled, not installed)
Accessories (sold separately)
Solid Brass drain with Chrome plated stainless steel grid
36" White vinyl shower curtain with stainless steel hooks

OPS-3636-RS TRANSFER SHOWER

ADA COMPLIANT


SUBMITTAL SHEET


ADA STANDARDS FOR ACCESSIBLE DESIGN
FHA. CSA B45.5-11 / IAPMO Z124-2011, HUD UM 73a, ASTM F-462


TO COMPLETE YOUR ORDER, THIS DOCUMENT MUST BE SIGNED AND FAXED TO AKER ORDER DESK FAX: 1-800-527-3368 • PHONE: 1-800-523-4093


TECHNICAL DRAWINGS

Left side shown Right side symmetrical











DAM PROFILE

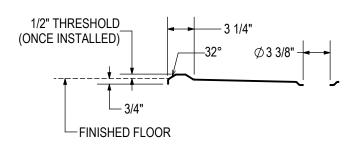

FRAMING DIMENSIONS



Model	А	В	С	D	Е
106069	38 ¾	39	38	19 ½	19 %

MINIMUM CLEARANCE

SHOWER 36" X 36"	
ADA	
F	48"
G	36"

Clearance zone from the control wall and adjacent to the onen face.

