



Buy it for looks. Buy it for life.®

## Specifications

### DESCRIPTION

- Metal construction
- Integral 1/2" PEX
- Includes (2) 1/2" CPVC adapters
- Designed to be installed on decks up to 1-7/8" (48mm) on 10" centers
- Accommodates 1/2" (13mm) additional finish deck
- Includes test plug

### OPERATION

- Can be installed with any Moen deck mounted Roman tub trim kit
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle clockwise to open (counterclockwise to close)

### FLOW

- Designed to deliver 16 gpm at 45 psi. (60L/min)

### CARTRIDGE

- Nonmetallic and stainless steel materials


### STANDARDS

- Designed and manufactured to comply with the applicable requirements of: ASME A112.18.1/CSA B-125.1, ASTM F1807, CSA B137.5 for PEX, ASTM D2846, CSA B137.6 for CPVC and all applicable requirements referenced therein

### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations


**NOTE:** Plumbing codes require this product to be used with a device conforming to ASSE.

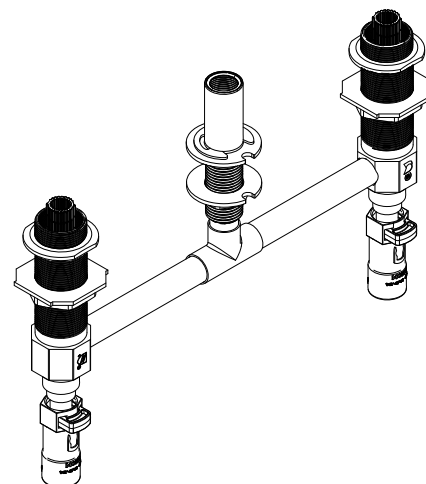

**Model:** 4797

**Moen®**  
**Roman Tub High Flow Rough-In**  
**Valve 10" - Fixed Type**

104465 Thermostatic mixing  
valve sold separately is certified to  
ASSE 1070 and CSA B-125.3

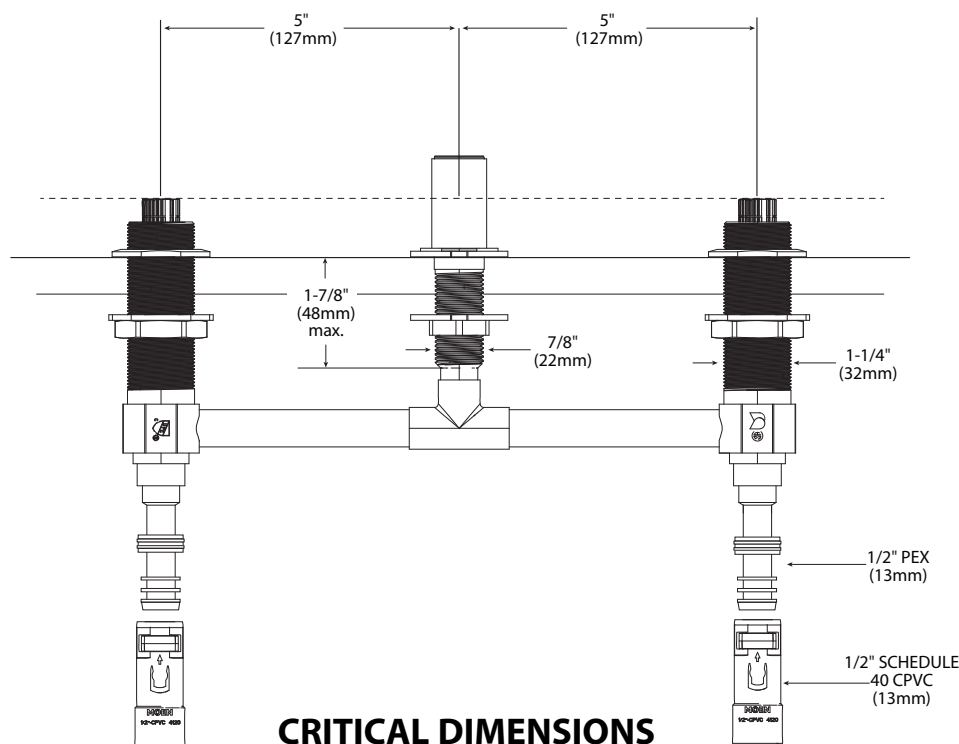

### CRITICAL DIMENSIONS

(DO NOT SCALE)