

DESCRIPTION

- Metal construction
- Comes in various finishes identified by suffix
- 1-hole installation (deckplate included)
- Includes
 - Flexible supply lines with 3/8" compression fittings
 - Duralock™ quick connect for easier installation
 - Power Clean™ spray technology for faster cleaning
 - Reflex™ pulldown wand system with 68" braided hose for smooth operation, maneuverability, and secure wand docking

OPERATION

- Operates in both stream or spray modes when wand is docked or pulled down
- Lever-style handle operates with less than 5lbs. of force
- Temperature controlled by 100° arc of handle travel

FLOW

- 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE


- 1269 ceramic disc cartridge for single-handle faucets

STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B 125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA ♿ for lever handle
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 - 10 year limited warranty when used in a multifamily installation
 - 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations

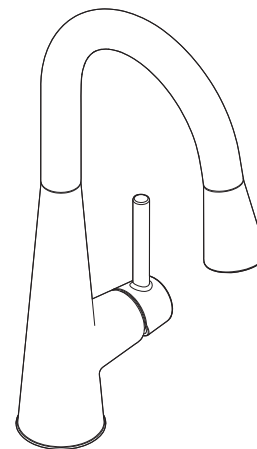

Sleek™ Single-Handle Pulldown Prep / Bar Faucet

MODELS: 7664 series

NOTE: This faucet is designed to be installed through 1, 1-1/2" (38mm) Min. Dia.

