

Transitional™ Single Function Showerhead

Model: 6370 series



DESCRIPTION

- Various finishes identified by suffix
- Fixed mount showerhead only
- Nonmetallic spray face
- Nonmetallic shell

OPERATION

- Single spray

FLOW

- Showerhead is limited to 2.5 gpm (9.5 L/min) max.
- EP suffix models are limited to 1.75 gpm (6.6 L/min) max.


STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

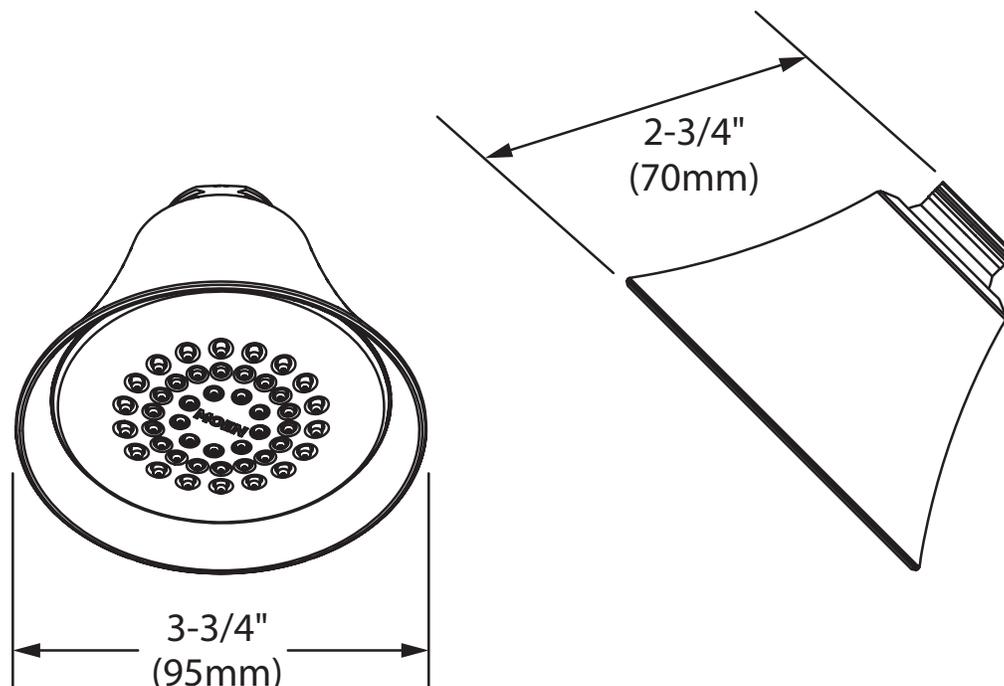

CRITICAL DIMENSIONS

(DO NOT SCALE)