

Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

DESCRIPTION

- Metal construction with chrome plated finish
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing
- Installation through 3 holes, 1" min. diameter, and 4" on center
- Includes pop-up waste assembly except in model 64900
- Includes hot and cold temperature indicators

OPERATION

- **Knob handles**
- Maximum handle rotation angle is 90° to full on
- Both handles counterclockwise to open (clockwise to close)

FLOW

- Water usage is limited to the maximum flow rates as indicated by the corresponding product markings
 - 1.2 gpm max (4.5 L/min) at 60 psi

CARTRIDGE

- 1234 Duralast® cartridge
- Nonmetallic and stainless steel material

STANDARDS

- Third party certified at WaterSense®, ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein including NSF 61/9 & 372
- Products marked with 1.2 gpm are compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

OPTIONS (See Illustrated Parts page)

Thin and thick deck mounting hardware kits available

Specifications



CHATEAU®


Two-Handle 4" Centerset Lavatory Faucet

Bulk Models (12 per carton):

64919 includes metal waste 64920 includes 50/50 waste 64900 less waste*

Models less waste include removable plug button in lift rod hole, and can be installed through 2 holes, 1" min. diameter, and 4" on center



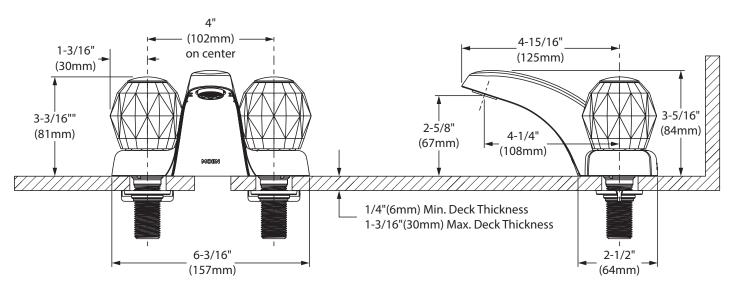

CRITICAL DIMENSIONS

(DO NOT SCALE)



Specifications

DESCRIPTION

- Metal construction with a chrome plated or LifeShine® polished brass finish
- 1/2" IPS connections
- · Includes metal pop-up type waste assembly

OPERATION

- Knob style handles with hot and cold color indicators
- Rotate either handle counterclockwise to open and clockwise to close

FLOW

Aerator is limited to 2.2 gpm max (8.3 L/min)

CARTRIDGE


- 1224 cartridge design
- Nonmetallic and stainless steel material

STANDARDS

- Third party certified by CSA to meet CSA B-125 and ASME A112.18.1M and all
 applicable requirements referenced therein.
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Water Drinking Act

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations




CHATEAU®

Two-Handle Lavatory Faucet with Metal Waste Assembly

Bulk Models (12 per carton): 64919 includes metal waste

NOTE: Designed to be installed through 3 - 1" min. dia. holes 2" on center

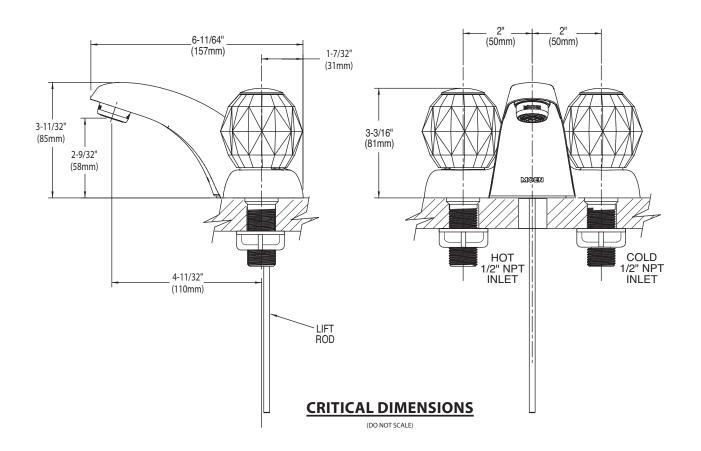

Rev. 12/03

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com



Specifications

CHATEAU®

Two-Handle Lavatory Faucet with Metal Waste Assembly

Bulk Models (12 per carton): 64919, 64920A, 64920P, 64920W

NOTE: De signed to be installed through 3 - 1" min. dia. holes 2" on center

DESCRIPTION

- Metal construction with a chrome plated or decorative antique brass, LifeShine® polished brass or glacier finish
- 1/2" IPS connections
- · Includes metal pop-up type waste assembly

OPERATION

- Knob style handles
- · Rotate either handle in a counterclockwise manner to open and clockwise to close

FLOW

Aerator is limited to 2.2 gpm max (8.3 L/min)

CARTRIDGE


- 1224 cartridge design
- · Nonmetallic and stainless steel material

STANDARDS

- Third party certified by CSA to meet CSA B-125 and ASME A112.18.1M and all
 applicable requirements referenced therein.
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Water Drinking Act

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

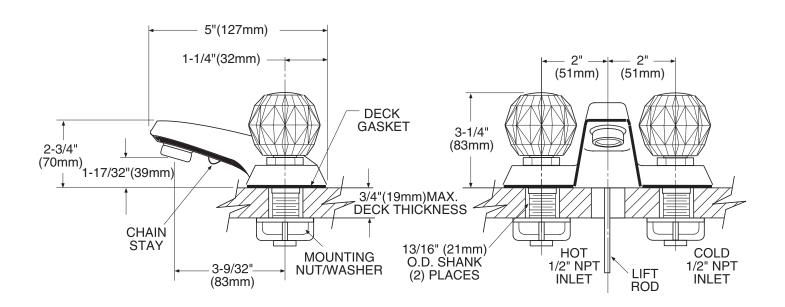

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com