



Buy it for looks. Buy it for life.®

There is more than 1 version of this model.  
Page down to identify the version you have.

#### DESCRIPTION

- Metal construction with various finishes identified by suffix
- Flexible supplies with 3/8" compression fittings
- Includes matching finish side spray with Hydrolock® quick connect system
- Hydrolock® quick connect installation

#### OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel

#### FLOW

- Spout flow is limited to 2.0 gpm (7.6 L/min) at 60 psi

#### CARTRIDGE

- 1255™ Duralast™ cartridge

#### STANDARDS


- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

- **ADA**  for lever handle

#### WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

## Specifications

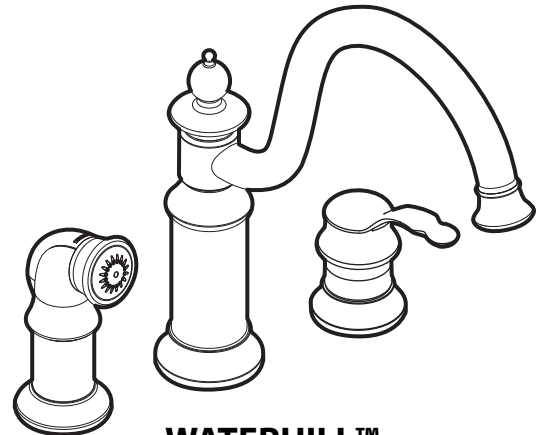

**WATERHILL™**  
**Single-Handle Kitchen Faucet**

**Models: S711 series**

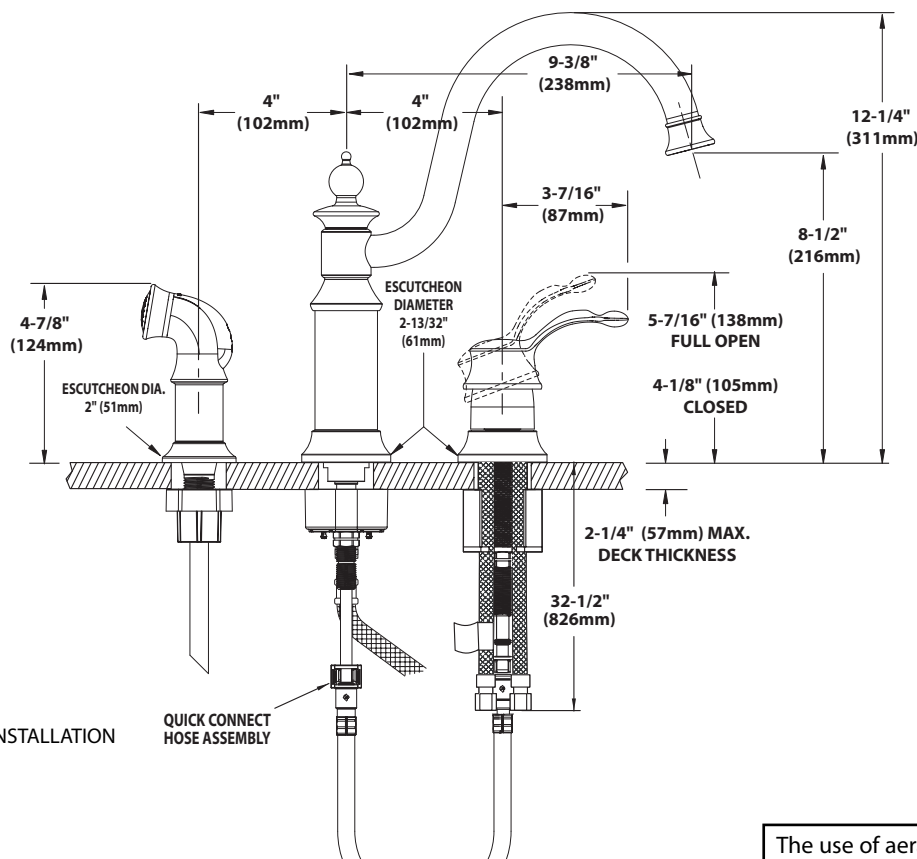

**NOTE:** MINIMUM DIA. HOLES FOR INSTALLATION

Spout = 1-1/4" (32mm)

Handle = 1-1/4" (32mm)

Side Spray = 1" (25mm)

### CRITICAL DIMENSIONS

(DO NOT SCALE)

The use of aerator part 116711 reduces flow to a maximum of 1.5 gpm (5.7L/min.)

**FOR MORE INFORMATION CALL: 1-800-BUY-MOEN**

**www.moen.com**

Rev. 12/11

Hydrolock® is a registered trademark of COOPER STANDARD AUTOMOTIVE INC.



Buy it for looks. Buy it for life.®

# Specifications

## DESCRIPTION

- Metal construction with various finishes identified by suffix
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing
- Includes matching finish side spray with Hydrolock® quick connect system
- Hydrolock® quick connect installation

## OPERATION

- Lever style handle
- Temperature controlled by 130° arc of handle travel

## FLOW

- Aerator is limited to 2.0 gpm (7.6 L/min) at 60 psi

## CARTRIDGE

- 1225 cartridge design with nonmetallic/nonferrous and stainless steel materials


## STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

- **ADA**  for lever handle


## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

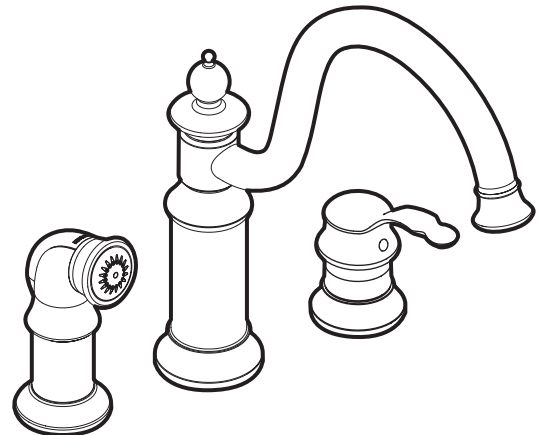

## WATERHILL™ Single-Handle Kitchen Faucet

Models: S711 series

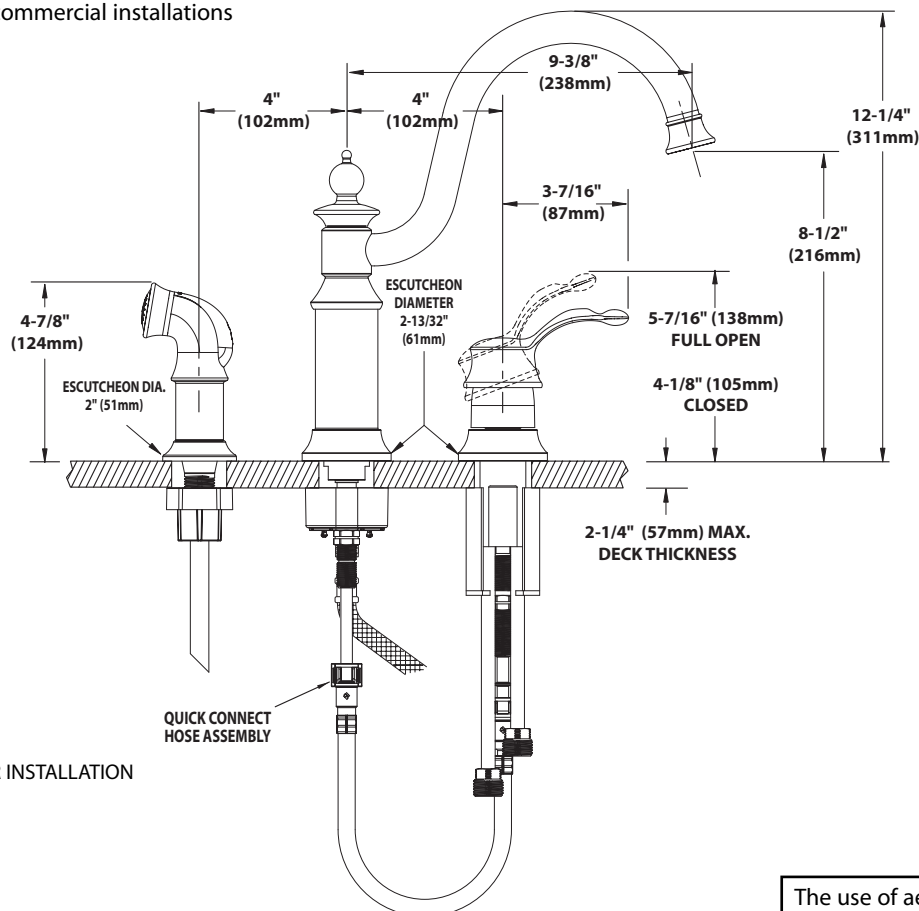

**NOTE:** MINIMUM DIA. HOLES FOR INSTALLATION

Spout = 1-1/4" (32mm)

Handle = 1-1/4" (32mm)

Side Spray = 1" (25mm)

## CRITICAL DIMENSIONS

(DO NOT SCALE)

The use of aerator part 116711 reduces flow to a maximum of 1.5 gpm (5.7L/min.)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

[www.moen.com](http://www.moen.com)

Rev. 12/11

Hydrolock® is a registered trademark of COOPER STANDARD AUTOMOTIVE INC.