

## DESCRIPTION

- Brass construction
- 3/4" IPS connections

## OPERATION

- Flow lever operates counterclockwise through a 90° arc with off at 6 o'clock and maximum flow at the 3 o'clock position. Shut off in clockwise direction

## CARTRIDGE

- Ceramic disc cartridge design

## INSTALLATION


- Volume control valve must be installed with the arrow pointing in the water flow direction

## STANDARDS

- Third party certified to meet CSA B-125.1, ASME A112.18.1 and all applicable requirements referenced therein including ASSE1016


## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



## 3/4" Volume Control Valve

**Model: S3600**

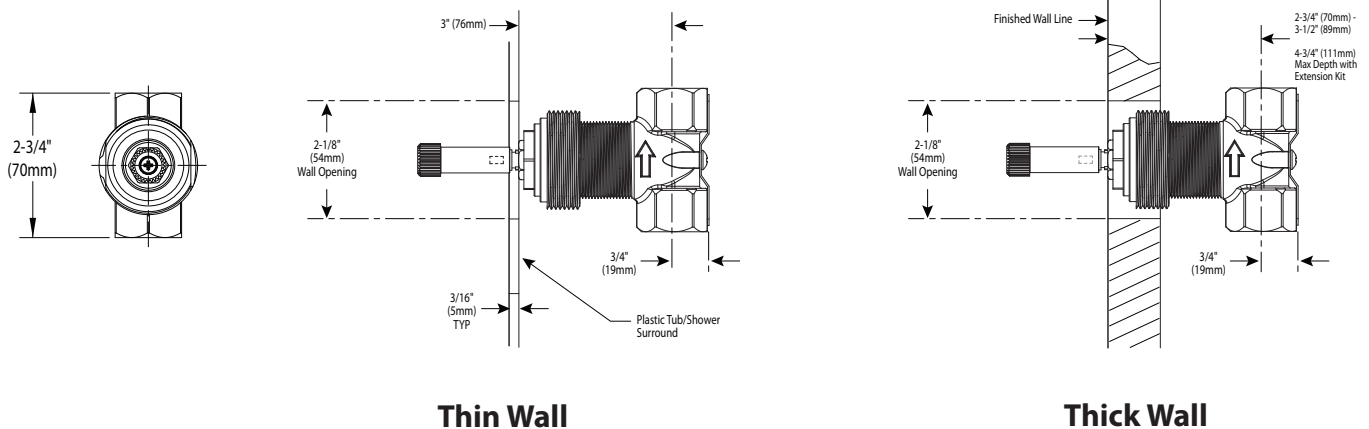

## CRITICAL DIMENSIONS

(DO NOT SCALE)