

Specifications

DESCRIPTION

- · Metal construction with chrome plated finish
- 1/2" IPS connections
- · Includes removable plug button in lift rod hole

OPERATION

- Lever style handles with hot and cold color indicators
- Hot sidé counterclockwise to open (clockwise to close)
- Cold side clockwise to open (counterclockwise to close)

FLOW

 Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi, for products made before October 2008 flow is limited to 2.2 gpm max (8.3 L/min)

CARTRIDGE


- 1224 cartridge design
- Nonmetallic and stainless steel material

STANDARDS

- Third party certified to: WaterSense,® CSA B-125.1, ASME A112.18.1, ANSCCI A117.1 and all applicable requirements referenced therein
- · Certified to ANSI/NSF 61/9
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA (for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations




CHATEAU®
Two-Handle Lavatory Faucet

Model: 64922 **Bulk Pack Model (12 per Carton)**

NOTE: DESIGNED TO BE INSTALLED THROUGH 3 - 1" MIN. DIA. HOLES 2" ON CENTER



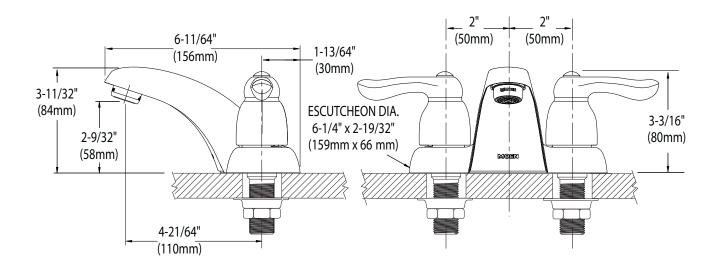

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com