

Class 150 Ductile Iron Body Swing Check Valves

Raised Face Flanges • Bolted Bonnet • 316 SS Trim



250 PSI/17.2 Bar Non-Shock Cold Working Pressure to -20° F to 100° F/-29° C to 38° C
185 PSI/10.3 Bar Saturated Steam to 366°F/185 ◆

Certified Lead-Free* to NSF/ANSI-61-8 (includes Annex F and G) and NSF/ANSI-372

CONFORMS TO MSS SP-136

MATERIAL LIST

PART	SPECIFICATION
1. Bolt	Steel ASTM A307
2. Identification Plate	Aluminum
3. Bonnet	Ductile Iron ASTM A395
4. Body Gasket	Synthetic Fibres
5. Nut	Steel ASTM A563
6. Side Plug	Stainless Steel ASTM A193 B8M
7. Hanger Pin	Stainless Steel ASTM A276
8. Hanger	Stainless Steel ASTM A351 CF8M
9. Disc ¹	Stainless Steel ASTM A351 CF8M
10. Seat Ring	Stainless Steel ASTM A351 CF8M
11. Disc Nut	Stainless Steel ASTM A351 CF8M
12. Body	Ductile Iron ASTM A395
13. Disc Bolt ¹	Stainless Steel UNS S31600

¹ 2"-4" stainless steel disc

5"-12" ductile iron disc with SST disc face ring and disc bolt



F-938-33
Flanged-Raised Face


DIMENSIONS—WEIGHTS—QUANTITIES

Size	Dimensions								Weight	
	A		B		D		E		Lbs.	Kg.
In. mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.		
2 50	8.00	203	3.94	100	6.00	152	.63	16	24	11
2½ 65	8.50	216	4.50	114	7.00	178	.69	17	35	16
3 80	9.50	241	5.13	130	7.50	191	.75	19	47	21
4 100	11.50	292	6.13	156	9.00	229	.94	24	80	36
5 125	13.00	330	6.81	173	10.00	254	.94	24	100	46
6 150	14.00	356	8.00	203	11.00	279	1.00	25	146	66
8 200	19.50	495	9.44	240	13.50	343	1.13	29	274	125
10 250	24.50	622	12.06	306	16.00	406	1.19	30	426	194
12 300	27.50	699	16.13	410	19.00	483	1.25	32	655	298

Lever and Weight/Spring Options available only in 3", 4" and 6". (see page 101)

Note: On pump discharge, the preferred check valves are:

- inline, spring assisted, center-guided, lift checks
- spring assisted twin (double) disc
- swing design with lever and weight or lever and spring

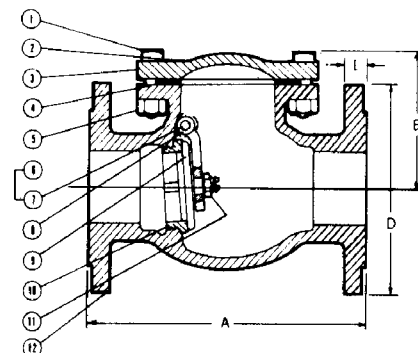

F-938-33
Flg x Flg

Install 5 pipe diameters minimum downstream from pump discharge or changes in direction to avoid flow turbulence. Flow straighteners may be required in extreme cases.

NIBCO® Check Valves may be installed in both horizontal and vertical lines with upward flow or in any intermediate position.

WARNING: Do not use for Reciprocating Air Compressor Service.

◆ For detailed Operating Pressure, refer to Pressure Temperature Chart on page 114.

*Weighted average lead content ≤ 0.25%

VISIT WWW.NIBCO.COM FOR CURRENT CHEM-GUIDE AND GALVANIC POTENTIAL IN PIPING SYSTEMS INFORMATION.

Visit our website for the most current information.