

250 PSI CWP Bronze Gate Valve

Screw-in Bonnet • Non-Rising Stem • Solid Wedge •
Push-on Ends with Joint Restraints

250 PSI/17.2 Bar Bar Non-Shock Cold Working Pressure

CONFORMS TO MSS SP-80

MATERIAL LIST

PART	SPECIFICATION
1. Handwheel Nut	300 Series Stainless Steel
2. Identification Plate	Aluminum
3. Handwheel, Cross	Bronze ASTM B 584 Alloy C84400
4. Stem	Silicon Bronze ASTM B 371 Alloy C69430 or ASTM B 99 Alloy C65100
5. Packing Nut	Bronze ASTM B 62 or ASTM B 584 or Brass ASTM B 16
6. Packing Gland	Bronze ASTM B 62 or ASTM B 584 or Brass ASTM B 16
7. Packing	Aramid Fibers with Graphite
8. Stuffing Box	Bronze ASTM B 62 Alloy C83600
9. Bonnet	Bronze ASTM B 62 Alloy C83600
10. Body	Bronze ASTM B 584 Alloy C84400 or ASTM B 62 Alloy C83600
11. Wedge	Bronze ASTM B 62 Alloy C83600


DIMENSIONS—WEIGHTS

Size	Dimensions						Weight		
	A		B		C				
In.	mm.	In.	mm.	In.	mm.	In.	mm.	Lbs.	Kg.
2	50	6.63	168.4	7.00	177.8	1.78	45.2	8.28	3.75

* Freezing weather precaution — subsequent to testing a piping system, valves should be in an open position to allow complete drainage.



PR-113-K

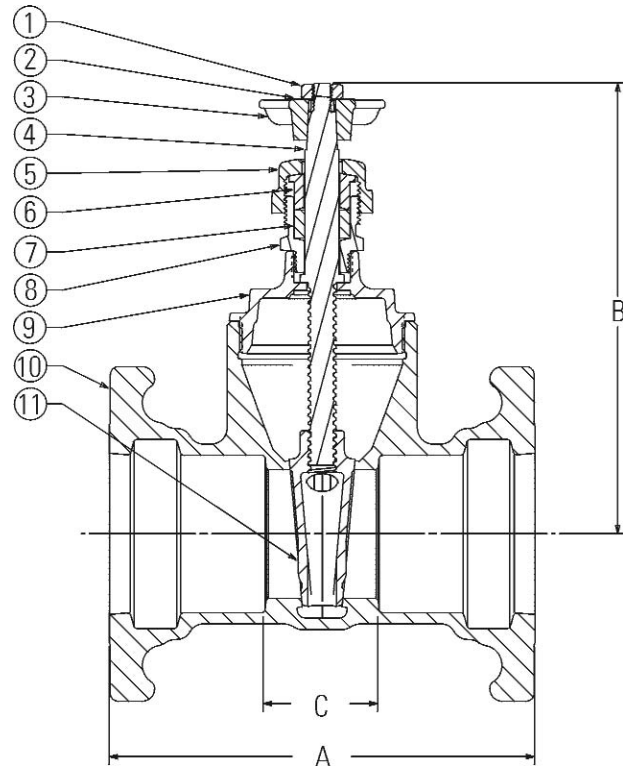

PR-113-K
PO x PO