

Stainless Steel Ball Valves

One-Piece Body • Reduced Port • Blowout-Proof Stem •
316 SS Trim • Vented Ball

2000 PSI/138 Bar Non-Shock Cold Working Pressure ♦

CONFORMS TO MSS SP-110

MATERIAL LIST

PART	SPECIFICATION
1. Body	Stainless Steel ASTM A 351 Type CF8M
2. Body Insert	Stainless Steel ASTM A 351 Type CF8M or ASTM A 351 Type CF8M
3. Ball (Vented)	Stainless Steel ASTM A 276 Type 316 or ASTM A 351 Type CF8M
4. Stem	Stainless Steel ASTM A 276 Type 316
5. Seat	Reinforced PTFE
6. Thrust Washer	Reinforced PTFE (Carbon 25% + PTFE 75%)
7. ¹ Stem Packing	PTFE
8. Threaded Pack Gland	Stainless Steel ASTM A 276 Type 316
9. Handle Nut	Stainless Steel ASTM A 276 Type 304
10. Locking Handle	Stainless Steel ASTM A 240 Type 304


¹ 1/4"-3/4" one each, 1"-2" two each.

NOTE: Valves are static grounded by thrust washer and packing.
Valves tested in accordance with ASME B16.34




T-560-S6-R-66-LL

Threaded

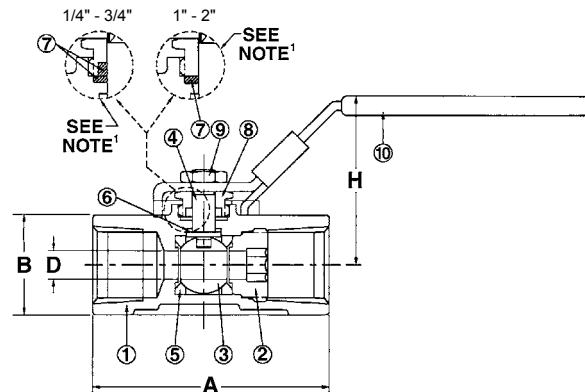

T-560-S6-R-66-LL
NPT x NPT

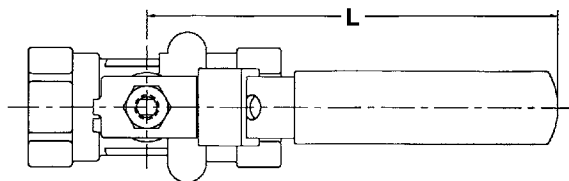

DIMENSIONS—WEIGHTS—QUANTITIES

Size		Dimensions										T-560-S6-R-66-LL		Master Ctn. Qty.
		A		B		D		L		H				
In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	Lbs.	Kg.	
1/4	8	2.28	58	1.10	28	.31	8	4.29	109	1.97	50	.68	.31	50
3/8	10	2.28	58	1.10	28	.31	8	4.29	109	1.97	50	.68	.31	50
1/2	15	2.60	66	1.10	28	.31	8	4.29	109	1.97	50	.66	.30	50
3/4	20	2.83	72	1.34	34	.47	12	4.29	109	2.20	56	.93	.42	50
1	25	3.23	82	1.61	41	.62	16	5.75	146	2.56	65	1.59	.72	40
1 1/4	32	3.54	90	1.97	50	.81	21	5.75	146	2.76	70	2.22	1.01	20
1 1/2	40	3.86	98	2.24	57	1.00	25	7.40	188	3.29	84	3.22	1.46	20
2	50	4.33	110	2.76	70	1.25	32	7.40	188	3.49	89	4.65	2.11	10

♦ For detailed Operating Pressure, refer to Pressure Temperature Chart on pages 66 and 67.