



OATEY QUIET PIPES® HAMMER ARRESTORS TEE FITTING

Job Name _____ Item # _____
Location _____
Engineer _____ Contractor _____
PO # _____ Tag _____
Representative _____

SPECIFICATIONS

Oatey Quiet Pipes Hammer Arrestors shall be installed in any diameter pipe supply application which could experience water hammer due to quick closing valves or faucets. Arrestor chambers shall be specifically sized to accommodate and dissipate energy generated by such valves and faucets. Arrestors shall be effective when installed at any angle. Arrestor shall be lead-free, made of copper and include a polypropylene piston with two NBR o-rings. Arrestors shall conform to ANSI/ASSE1010-2004, listed and approved for installation with no access panel required.

FEATURES & MATERIALS

Arrestor Body	Copper (Type L)
Piston	Polypropylene with two NBR O-rings
Piston Lubrication	Dow Corning Molykote 111
Fittings Available	Female Compression, O.D. Compression, F1807 PEX & F1960 PEX (no lead brass C46400)

PERFORMANCE SPECIFICATIONS

Temperature Range	33° - 180° F
Max Working Pressure	0-60 PSI


LISTINGS & CODE APPROVALS

ANSI/ASSE1010-2004
cUPC
PDI WH-201-2017



DIMENSIONS

Arrestor Size:	AA	AA	AA	AA	AA	AA	AA
Product #:	34473	34475	34465	34474	34471	34472	34467
Arrestor Body Diameter [A]:	0.875"	0.875"	0.875"	0.875"	0.875"	0.875"	0.875"
Overall Height [B]:	2.75"	2.75"	2.75"	2.75"	2.75"	2.75"	2.75"
Connection Type [C]:	O.D. Comp.	Female Comp.	Female Comp.	O.D. Comp.	F1960 PEX	F1807 PEX	Female Comp.
Connection Type [D]:	O.D. Comp.	O.D. Comp.	O.D. Comp.	O.D. Comp.	F1960 PEX	F1807 PEX	O.D. Comp.
Connection Size	1/4"	1/4"	3/8"	3/8"	1/2"	1/2"	5/8"

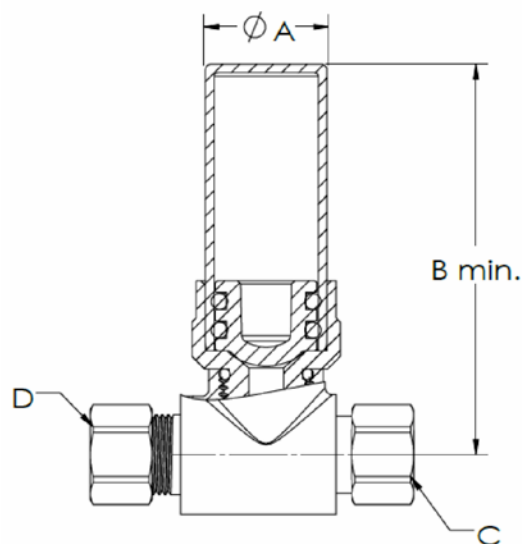

*Limited Lifetime Warranty –
See Oatey.com/warranty for details.

Access BIM/Revit content through www.Oatey.com



**OATEY QUIET PIPES®
HAMMER ARRESTORS
TEE FITTING**

Job Name	_____	Item #	_____
Location	_____		
Engineer	_____	Contractor	_____
PO #	_____	Tag	_____
Representative	_____		

PRODUCT SELECTOR

QUIET PIPES® HAMMER ARRESTORS TEE FITTING			
✓	Product Number	Description	CTN. QTY.
	34473	AA, 1/4" O.D. Compression	30
	34475	AA, 1/4" Female Compression	30
	34465	AA, 3/8" Female Compression	30
	34474	AA, 3/8" O.D. Compression	30
	34471	AA, 1/2" F1960 PEX	30
	34472	AA, 1/2" F1807 PEX	30
	34467	AA, 5/8" Female Compression	30