



FLEXIBLE BATH WASTE

Job Name _____ Item # _____
Location _____
Engineer _____ Contractor _____
PO # _____ Tag _____
Representative _____

SPECIFICATIONS

The Dearborn Flexible Bath Waste shall be used in applications where workplace obstructions are present and must be accommodated for. Design shall feature 26" or longer overflow pipe comprised of flexible schedule 40 PVC. Overflow elbow will be pre-welded for easy assembly. Overflow gasket shall be comprised of high memory rubber. Testing apparatus shall be included and must be removable and reusable.

FEATURES & MATERIALS

| | |
|-----------------------|-------------------------------|
| Drain/Overflow Elbows | PVC |
| Overflow Pipe | Flexible schedule 40 PVC pipe |
| Overflow Gasket | High memory rubber |
| Spud and Stopper | Plated brass |



PERFORMANCE SPECIFICATIONS

| | |
|-------------------|-------|
| Flow Rate (Drain) | 7 GPM |
|-------------------|-------|


APPROVALS AND LISTINGS

ASME A112.18.2 / CSA B125.2



DIMENSIONS

| | | |
|------|-------------------|------------------|
| [A]: | Overflow Height | 26.1" |
| [B]: | Drain Length | 7.4" |
| [C]: | Tube Diameter | 1.5" |
| [D]: | Drain/Spud Thread | 1.5" – 11.5 NPSM |

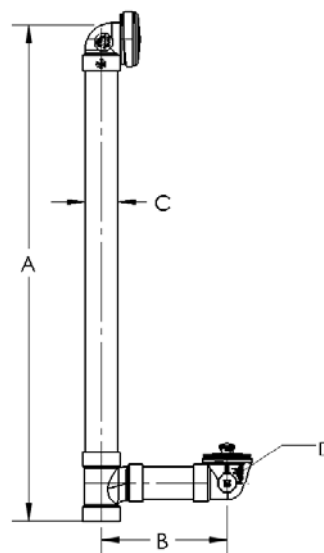

PRODUCT SELECTOR

| FLEXIBLE BATH WASTE | | | | |
|---------------------|----------------|--|-----------------------|-------------------|
| ✓ | Product Number | Description | Stopper Configuration | Finish |
| | PF7744BN | 24" Flexible PVC Bath Waste with Brass Drain | Uni-Lift | Brushed Nickel |
| | PF7744CP | 24" Flexible PVC Bath Waste with Brass Drain | Uni-Lift | Chrome Plated |
| | PF7744RB | 24" Flexible PVC Bath Waste with Brass Drain | Uni-Lift | Oil Rubbed Bronze |
| | PF7844BN | 24" Flexible PVC Bath Waste with Brass Drain | Touch Toe | Brushed Nickel |
| | PF7844CP | 24" Flexible PVC Bath Waste with Brass Drain | Touch Toe | Chrome Plated |
| | PF7844RB | 24" Flexible PVC Bath Waste with Brass Drain | Touch Toe | Oil Rubbed Bronze |

Access BIM/Revit content through www.oatey.com