


For Residential and Commercial Applications


| | | | |
|----------------|--|----------------------|--|
| Job Name | | Engineer / Architect | |
| Job Location | | Wholesaler | |
| Submittal Date | | Contractor | |

BRPX1901 Multi-Turn Dual Outlet Stop – Barbed PEX (Inlet) x Compression x Compression

Use: For use with water in accessible locations only. Not intended for recirculating systems that produce continuous use temperatures above 115° F. For those applications, use our KT™ series ball stop.

Design Features:

- **Machined one-piece brass body** provides strength, durability, and long-lasting performance
- **Knurled oval handle** provides a secure grip and smooth on/off operation
- **Easy-to-remove handle** with screw attachment helps protect against accidental stop operation during rough-ins
-  **No Lead**
- **PEX end** designed to ASTM F1807
- **For use with** ASTM F876 PEX tubing, in ASTM F877 water distribution systems using ASTM F1807, and/or F2098 connection methods

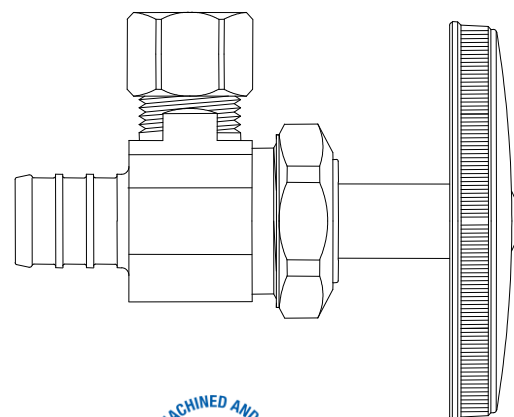

Operating Specifications:

Temperature: 40° - 140° F
Pressure: 125 PSI maximum

Standard

| STOP MATERIAL SPECIFICATIONS | |
|------------------------------|---------------|
| Valve Body | Brass |
| Stem | POM |
| Bib & Packing Washers | Rubber |
| Packing Nut | Brass |
| Handle | Polycarbonate |
| Handle Screw | Steel, plated |
| Plastic Sleeve | Plastic |
| Compression Nut | Brass |
| Compression Sleeve | Brass |

No Lead

| STOP MATERIAL SPECIFICATIONS | |
|------------------------------|---------------|
| Valve Body | No-Lead brass |
| Stem | POM |
| Bib & Packing Washers | Rubber |
| Packing Nut | Brass |
| Handle | Polycarbonate |
| Handle Screw | Steel, plated |
| Plastic Sleeve | Plastic |
| Compression Nut | Brass |
| Compression Sleeve | Brass |

Standard Part Listing:

- ☐ BRPX1901LR R1 1/2" nom crimp barb (for PEX) x 3/8" OD compression x 3/8" OD compression, rough brass, window tray


No-Lead Part Listing:

- ☐ BRPX1901LRX R1 1/2" nom crimp barb (for PEX) x 3/8" OD compression x 3/8" OD compression, rough brass, window tray

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.

BrassCraft®

BRPX1901 Multi-Turn Dual Outlet Stop – Barbed PEX (Inlet) x Compression x Compression

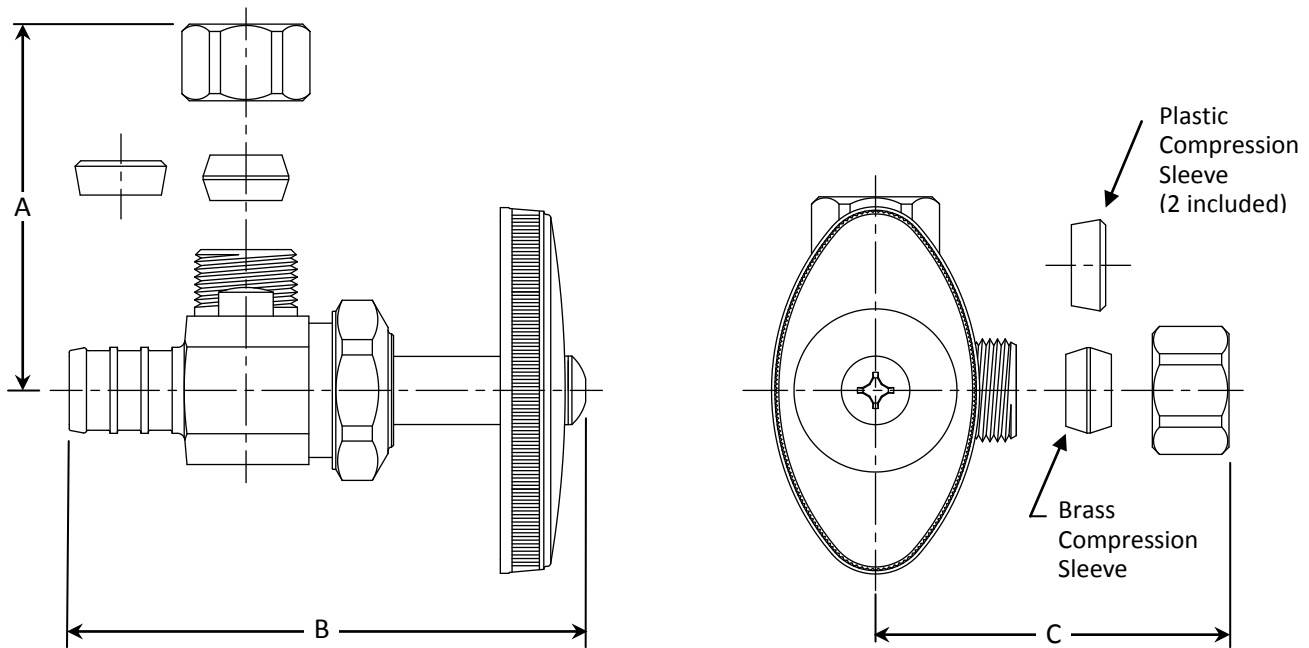

| PART DIMENSIONS (Inches) | | | |
|--------------------------|--------|--------|--------|
| Model | DIM. A | DIM. B | DIM. C |
| BRPX1901LR | 1.06 | 2.82 | 1.06 |

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (File # 0645)
- CSA listed to ASME A112.18.1 / CSA B125.1 (File # 204593)
- No Lead product CSA listed to Low Lead Content Certification Program – Plumbing Products Class 6853-01



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.

BrassCraft