

300 S. DAYTON ST. DAVISON, MI 48423 PH: 810-653-9626 FAX:810-654-2616

1003-64

DESCRIPTION:

## Clay to AC or DI

SCALE:


not to scale


SHEET 1 OF 1

N. Goddard

DATE:

2/15/2016

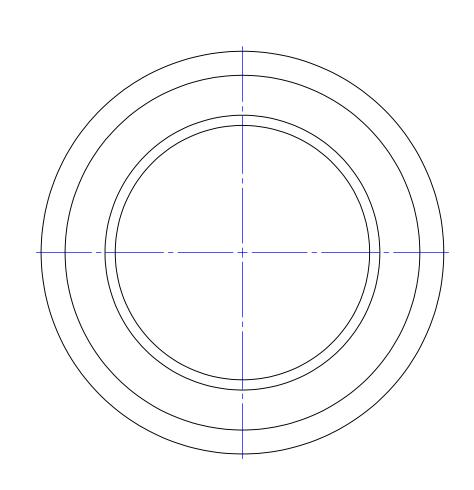

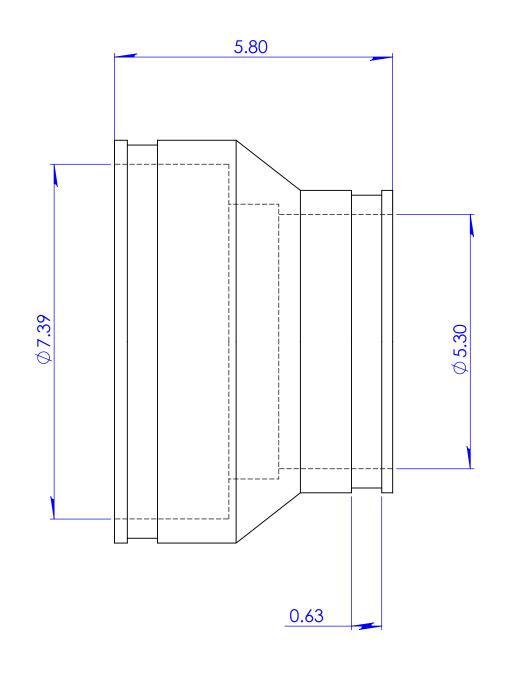

Note

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FERNCO, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FERNCO, INC. IS PROHIBITED.

TOLERANCES:
Fractional ± 1/4"
.XX= ±.06
ANG.= ±3°
UNLESS OTHERWISE SPECIFIED

	Part Weight		Installation Torque	60 in Ibs	UNITS:	SIZE:	DESIGNER:
	Min/Max Temp.	-30/140 Degrees F		D5926	INCHES	A	ľ
	Pressure Tested		Clamps used	300 Series Stainless	3RD ANGLE PROJECTION DO NOT SCALE DRAWING		CHECKER:
	Material	Flexible PVC 60 Duro Shore A	Box Quantity				
							•