

GASKETED CLOSET FLANGE

886 series

Push-Tite™

SPECIFICATION

Installed closet flanges shall be Sioux Chief 886 series Push-Tite closet flange. Flange ring shall have sufficient holes for securing to floor and optional notches or slots for inserting closet bolts. Flange throat shall be at least 3" in diameter and have smooth inner walls with no obstructions or ledges to provide full/spherical flow and clog resistance. Engineered elastomer flange gasket shall have 3 points of contact to ensure a positive seal inside any 4" nominal DWV piping.

MATERIALS

flange body: white or black ABS
gasket: engineered elastomer, chemical/heat resistant

DIMENSIONS

- A: gasket seal inside 4" DWV
- B: overall height 3 7/8"
- C: flange ring diameter 7"
- D: screw centers 6 1/8"
- E: top flange opening 4 1/4"
- F: ring thickness 7/16"
- G: flange tailpiece height 3 7/16"
- H: gasket height 1 1/4"

Item # Submitted _____

Job Name _____

Location _____


Engineer _____

Contractor _____

PO# _____ TAG _____



886-GP

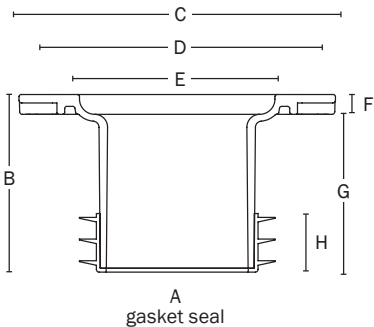

Create Item Number

886- A

e.g. 886-GP = white Push-Tite for PVC, 4" inside-fit

CONFIGURATION

- ☐ GP white for PVC
- ☐ GA black for ABS