



## PERRIN & ROWE® WALL MOUNT TUBULAR TUB SPOUT

Perrin & Rowe® Bath Transitional

**U.3330**

### FEATURES


- Wall mount tub spout
- Solid brass
- 8 1/4" spout tieh 3/4" female inlet
- 16-20 GPM
- Wall diverter available for showers, use valve U.5562NVO and trim U.3064LS/TO or U.3065X/TO

### COLORS/FINISHES

- Polished Chrome
- Polished Nickel
- Satin Nickel

### WARRANTY

- Limited Lifetime

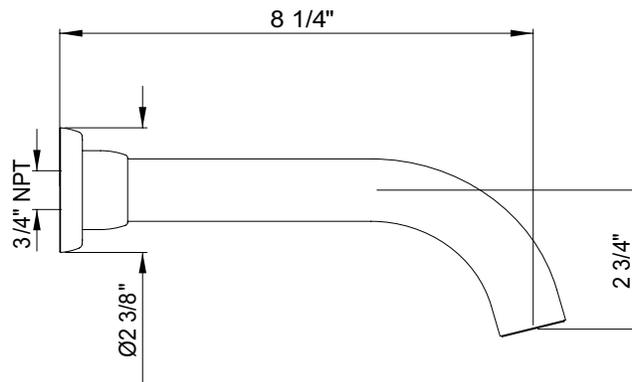

## INSTALLATION INSTRUCTIONS




### The Transitional Bathroom Collection

#### Installation & User Guide

#### 3 HOLE WALL MOUNTED SETS AND WALL VALVES


##### LAV SETS

- U.3320 (SPOUT)
- U.3321LS
- U.3322X
- U.3036TLS (LEVER TRIM)
- U.3037X (X-TOP TRIM)

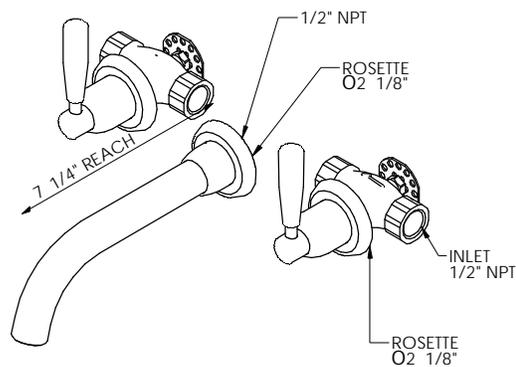

##### TUB SETS

- U.3330 (SPOUT)
- U.3331LS
- U.3332X

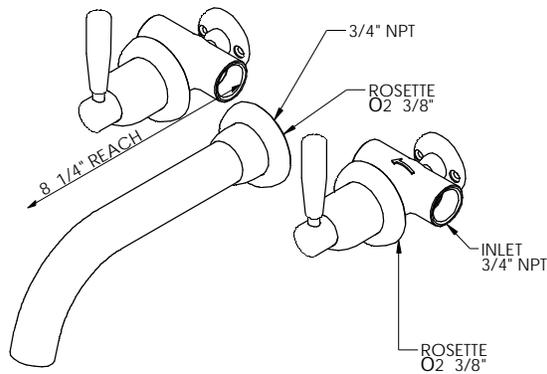

##### Temp Range:

Min 34°F  
Max 185°F

##### Recommended

##### Working Pressure:

Min 15 psi  
Max 75 psi

Ideal performance obtained with equal hot & cold pressures.

## INSTALLATION INSTRUCTIONS

### The Transitional Bathroom Collection Installation & User Guide


*Congratulations on the purchase of your Perrin & Rowe bathroom product. Correctly installed and with sensible care, this product will give you many years of trouble free service.*

#### IMPORTANT INFORMATION

**Before you proceed... We recommend you engage the services of a registered plumber to install this product.**

**In addition to the guide below it is essential that the written information overleaf is carefully read and understood.**

**Flush the plumbing system before installation.**



MIN 2 1/8"  
MAX 2 3/4"


O 1 3/4"

O 1 1/2" Hole

3"

**• U.3320 • U.3321LS • U.3322X  
WALL LAV SETS**

- Follow placement dimensions supplied for installation.
- When installing products make sure allowance is made for tiles etc.
- Cavity should be sufficient to allow for servicing of valves.
- Screw 1/2"NPT spout onto suitable shank using thread sealing materials sparingly.
- Push rosette back to wall surface.

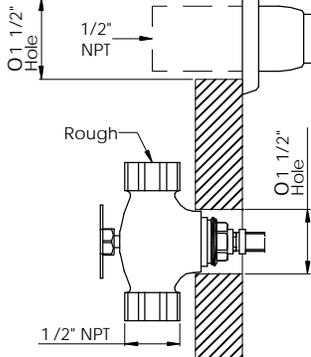

O 1 1/2" Hole

1/2" NPT

Rough


O 1 1/2" Hole

1/2" NPT

**Concealed Wall Valve**  
Ensure the handle is vertical when the valve is in the 'off' position.

- Assemble trim to rough ensuring handle is aligned correctly. If it is not, remove and turn a few splines until correct alignment can be achieved.

**Special Note for Installing a Pair of Lever Wall Valves**

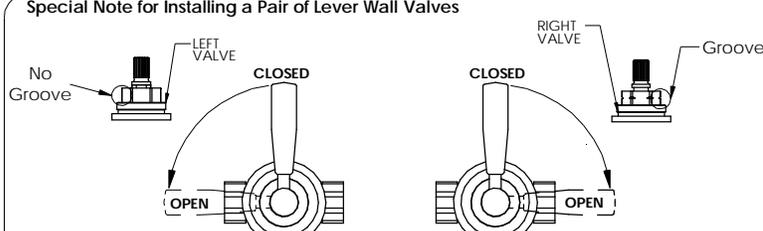

No Groove

LEFT VALVE

RIGHT VALVE

Groove

CLOSED

CLOSED


OPEN

OPEN

**OPERATION**

- This tap is fitted with quarter-turn ceramic disc valve units. Water flow from off to fully on is achieved by rotating the handles a quarter-turn.
- Ceramic disc valves are available opening in a clockwise or anti-clockwise direction. Should the handle of an installed tap operate in the wrong direction, this can be remedied by changing the ceramic disc valve to the other version.

## INSTALLATION INSTRUCTIONS

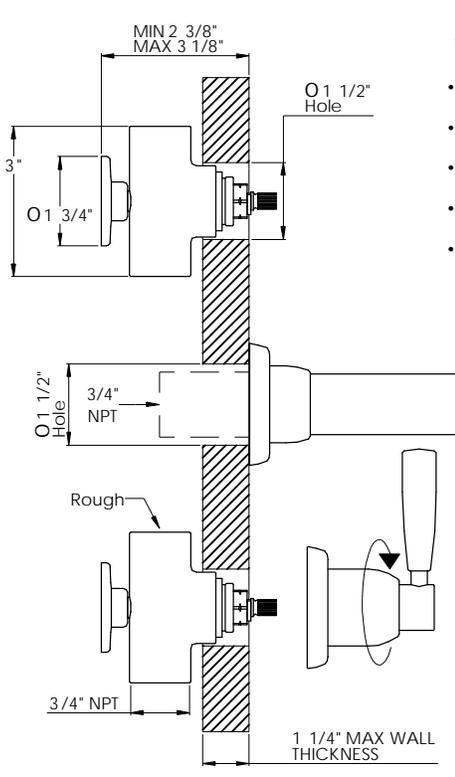

MIN 2 3/8"  
MAX 3 1/8"

O 1 1/2" Hole

3"

O 1 3/4"

O 1 1/2" Hole

3/4" NPT

Rough

3/4" NPT

1 1/4" MAX WALL THICKNESS

**• U.3330 • U.3331LS • U.3332X  
WALL TUB SETS**

- Follow placement dimensions supplied for installation.
- When installing products make sure allowance is made for tiles etc.
- Cavity should be sufficient to allow for servicing of valves.
- Screw 3/4"NPT spout onto suitable shank using thread sealing materials sparingly.
- Push rosette back to wall surface.

**Concealed Wall Valve**  
Ensure the handle is vertical when the valve is in the 'off' position.

- Assemble trim to rough ensuring handle is aligned correctly. If it is not, remove and turn a few splines until correct alignment can be achieved.

### BEFORE USE

- Carefully check the installation for leaks.
- If further building work is to be carried out in the vicinity, cover the tap with a plastic bag to avoid damaging the finish.
- Please ensure that the installation complies with the local plumbing codes.

### CARE & MAINTENANCE

- Occasional cleaning with warm soapy water, followed by a polish with a soft cloth is all that is required to keep the plated finish in good condition.
- If you wish to occasionally polish your tap and it has a Chrome, Nickel or Pewter finish, we recommend a gentle metal cleaner such as AUTOSOL metal polish, which is available from hardware and automotive parts stores.
- Do not use any cleaners on Gold or English Bronze taps.
- Do not use proprietary abrasive liquids, powders, or pads to clean the product. You will damage the plated finish and void your warranty.

## INSTALLATION INSTRUCTIONS

### ROHL WARRANTY POLICY


All products supplied by ROHL carry warranties against manufacturing defects.

Perrin & Rowe products carry a Limited Lifetime Warranty.


ROHL LLC will provide free of charge, as its options, replacement part(s) or product (or a comparable alternative product) to replace those which have proven defective in materials or workmanship.

For full ROHL LLC WARRANTY please contact ROHL or visit [www.rohlhome.com](http://www.rohlhome.com)

### SPARES LAV SETS

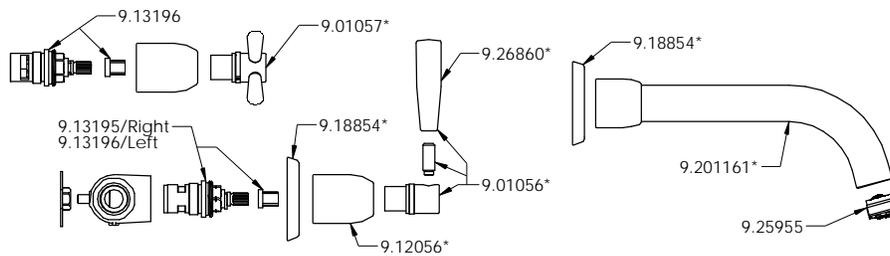

### SPARES TUB SETS

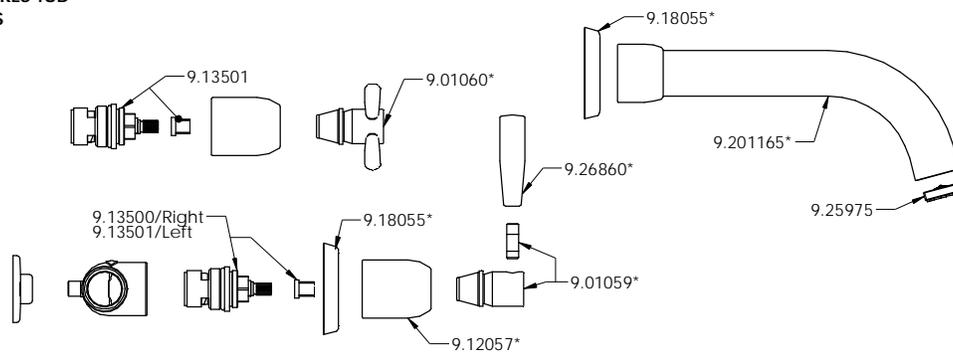

\* Where indicated please specify color

### SPARE PARTS & SERVICE

**ROHL**  
Authentic Luxury for Kitchen and Bath®

3 Parker  
Irvine  
CA 92618  
(714) 557-1933

[www.rohlhome.com](http://www.rohlhome.com)

Perrin & Rowe products are manufactured in England using quality materials, the latest technology and built to the highest standards.

We would like to thank you for purchasing this Perrin & Rowe product and invite you to view the comprehensive range of Perrin & Rowe tapware, shower fittings, bathroom accessories, soap dispensers and bathroomware.

Please contact us to receive our latest product catalogues or view them online at [www.rohlhome.com](http://www.rohlhome.com)