

www.rohlhome.com



PERRIN & ROWE® HOLBORN C-SPOUT HOT WATER FAUCET

Perrin & Rowe® Kitchen Filtered Hot Water Dispensers

U.1347LS

FEATURES


- Hot water faucet only
- Unique Anti-Scald lock: innovative push mechanism with exclusive spring-back valve
- · Long lasting brass construction
- Swivel spout for ease of filling containers
- For use with U.1998 high performance hot water tank and U.1106 filter

COLORS/FINISHES

- Polished Chrome
- Polished Nickel
- Satin Nickel
- English Bronze
- English Gold*
- Unlacquered Brass**

WARRANTY

- 5-year Limited Warranty on Faucet
- * 5-year Limited Warranty on English Gold
- ** No Warranty on Unlacquered Brass

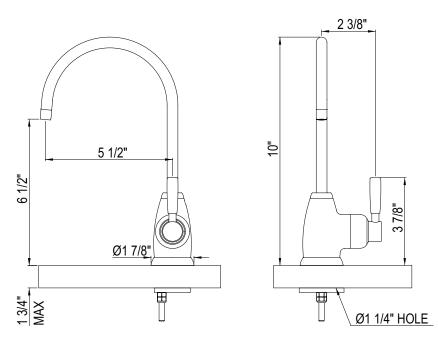

ä

INSTALLATION INSTRUCTIONS



IMPORTANT WARNING!!

PLEASE ENSURE THAT THE RECOMMENDED HEATER TANK UNIT (U.1998) AND FILTER KIT (U.1106)IS USED.


TO AVOID PRESSURISED BOILING WATER AND TO COMPLY WITH US REGULATIONS THIS IS AN OPEN VENTED PRODUCT.

DO NOT PLUG IN THE UNIT UNTIL ALL WATER CONNECTIONS HAVE BEEN MADE AND THE TANK HAS FILLED COMPLETELY THEN FLUSHED TO REMOVE AIR.

IMPORTANT!! ENSURE A PRESSURE REDUCING VALVE (PRV) IS USED IN-LINE WITH COLD INLET AND IDEALLY SET TO 43.5PSI (3BAR). FAILURE TO DO SO MAY RESULT IN REDUCED PRODUCT PERFORMANCE.

INSTANT HOT WATER TEMPERATURES CAN REACH 210°F. THE FAUCET IS DESIGNED WITH FEATURES TO MINIMISE RISK AND POTENTIAL INJURY; TWO ACTION OPERATION, SPRING BACK VALVE AND DELAYED DELIVERY; BUT SHOULD BE OPERATED OR SUPERVISED BY A RESPONSIBLE ADULT.

PLEASE READ AND FULLY UNDERSTAND THE HEATER TANK INSTRUCTIONS BEFORE USE.

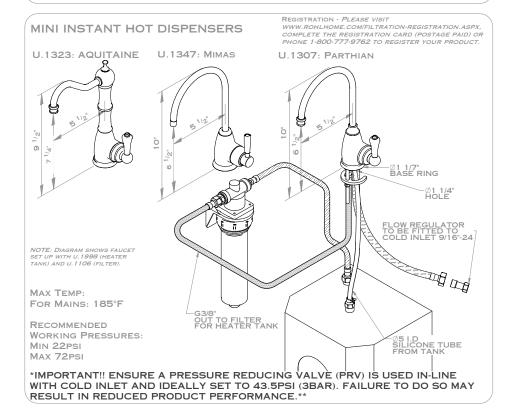




INSTALLATION INSTRUCTIONS THE MINI HOT DISPENSERS COLLECTION INSTALLATION & USER GUIDE CONGRATULATIONS ON THE PURCHASE OF YOUR PERRIN AND ROWE KITCHEN PRODUCT. CORRECTLY INSTALLED AND WITH SENSIBLE CARE, THIS PRODUCT WILL GIVE YOU MANY YEARS OF TROUBLE FREE SERVICE. IMPORTANT INFORMATION BEFORE YOU PROCEED ... WE RECOMMEND YOU ENGAGE THE SERVICES OF A REGISTERED PLUMBER TO INSTALL THIS PRODUCT PERRIN & ROWE TAPS REQUIRE A MAXIMUM INLET PRESSURE SUPPLY OF 75PSI. FOR INSTALLATIONS WHERE THE INLET WATER SUPPLY PRESSURE IS EVER ABOVE 75PSI, PRESSURE-LIMITING VALVES MUST BE INSTALLED PRIOR TO THIS TAP. IT IS ESSENTIAL THAT THE INFORMATION CONTAINED HEREIN IS CAREFULLY READ AND UNDERSTOOD PRIOR TO INSTALLING AND OPERATING THIS TAP. PREPARATION FOR THE INSTALLATION. FLUSH THE PIPEWORK BEFORE ONCE UNPACKED, REMOVE NUTS AND CLAMPING INSTALLING THIS TAPWARE. PLATE READY FOR INSTALLATION 1 ENSURE THE SILICONE TUBE PROTECTOR IS IN PLACE. CENTRAL AGAINST THE BASE OF THE TAP. WORK BASE RING MOUNTING DISPENSER: BASE SEAL • FEED THE FLEXIBLE CONNECTIONS Through the Ø1 $\,{}^{1/}\!_4$ " work surface hole ENSURING THE BASE SEAL IS IN PLACE BETWEEN TAP AND MOUNTING SURFACE. ł CLAMPING PLATE M THREADED STUD 3/4" • Ensure the base ring and tap are orientated correctly, Hot water lever should rotate to point forwards. The NUT NYLOCK NUT SPOUT FIXING SCREW SHOULD BE AT THE BACK. • SECURE BY USING THE CLAMPING PLATE AND NUTS. (BOX SPANNER IS PROVIDED) ATTACH THE FLOW REGULATOR 9/16" TO THE 9/16" COLD IN COLD INLET AND THEN CONNECT THE 9/16" BOX SPANNER (PROVIDED) FLEXIBLE HOSE END TO THE FLOW REGULATOR. FLOW REGULATOR 9/16" FEMALE - MALE Ē ENSURE ALL CONNECTIONS ARE FIRMLY TIGHTENED. CONSULT THE GUIDE PROVIDED WITH THE 白 HEATER TANK TO ENSURE CORRECT POSITIONING AND INSTALLATION. Ø3/8" COMPRESSION SERVICE VALVE

Rohl. Authentic Luxury for Kitchen and Bath®

www.rohlhome.com

INSTALLATION INSTRUCTIONS

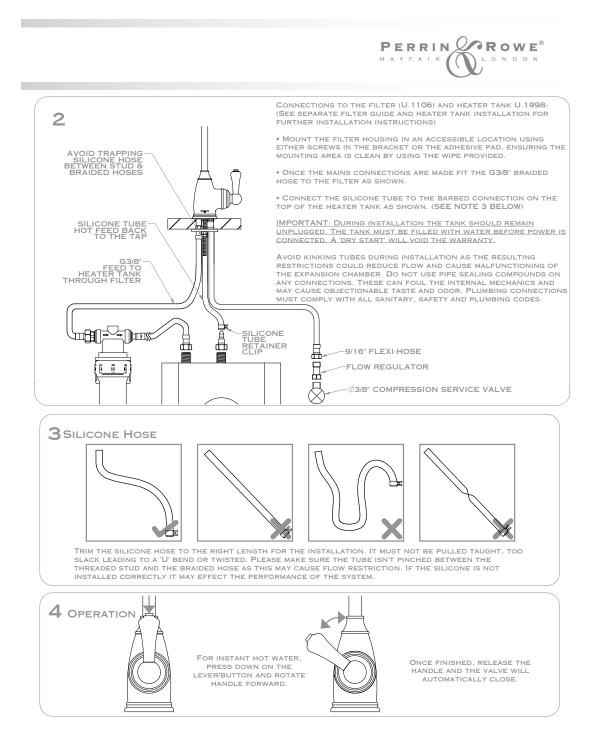

Authentic Luxury for Kitchen and Bath®

www.rohlhome.com

INSTALLATION INSTRUCTIONS

BEFORE USE

- CAREFULLY CHECK THE INSTALLATION FOR LEAKS.
 IF FURTHER BUILDING WORK IS TO BE CARRIED OUT IN THE VICINITY, COVER THE MIXER TAP TO AVOID DAMAGING THE FINISH
- PLEASE ENSURE THAT THE INSTALLATION COMPLIES WITH THE LOCAL PLUMBING CODES.

ROHL WARRANTY POLICY


ALL PRODUCTS SUPPLIED BY ROHL CARRY WARRANTIES AGAINST MANUFACTURING DEFECTS.

FOR FULL ROHL WARRANTY PLEASE CONTACT ROHL OR VISIT WWW.ROHLHOME.COM

PLEASE CONTACT THE LOCAL ROHL RETAILER OR SHOWROOM WHERE YOU PURCHASED THIS PRODUCT FOR ALL WARRANTY RELATED CLAIMS.

CARE & MAINTENANCE

- · OCCASIONAL CLEANING WITH WARM SOAPY WATER, FOLLOWED BY A POLISH WITH A SOFT CLOTH IS ALL THAT IS
- REQUIRED TO KEEP THE PLATED FINISH IN GOOD CONDITION. IF YOU WISH TO OCCASIONALLY POLISH YOUR FAUCET AND IT HAS A CHROME, NICKEL OR PEWTER FINISH, WE RECOMMEND A GENTLE METAL CLEANER OR METAL POLISH, WHICH IS AVAILABLE FROM HARDWARE AND AUTOMOTIVE PARTS STORES
- DO NOT USE ANY CLEANERS ON GOLD OR ENGLISH BRONZE FAUCETS.
- DO NOT USE PROPRIETARY ABRASIVE LIQUIDS, POWDERS, OR PADS TO CLEAN THE PRODUCT. YOU WILL DAMAGE THE PLATED FINISH AND VOID YOUR WARRANTY.

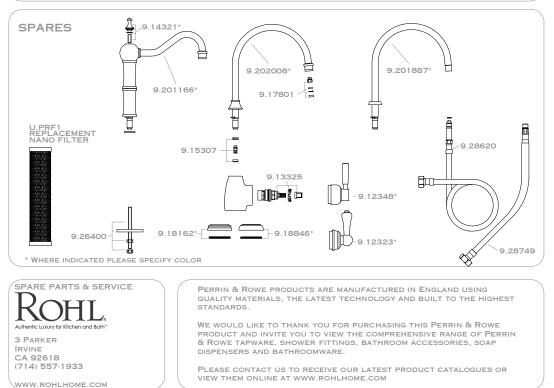

PERRIN & ROWE IS A REGISTERED TRADEMARK

9001307U ISSUE 1