



## Inline Filter Complete With Cartridge

Perrin & Rowe® Filtration featuring "Triflow® Technology"

**U.1812\***

### FEATURES


- For use with Triflow faucets
- Complete with stainless steel housing, wall mount bracket, connections and Katadyn filter
- Does not come with faucet
- 1/2" supply inlet hose, 3/8" supply outlet hose
- Includes adapter to 1/4" compression
- Remote shut-off included for quick change of cartridge
- Also for use with Country Kitchen filter faucets A1435 and A1635
- Installed under deck
- We recommend the use of a professional plumber for installation

### FINISHES

- N/A

### WARRANTY

- Limited Lifetime

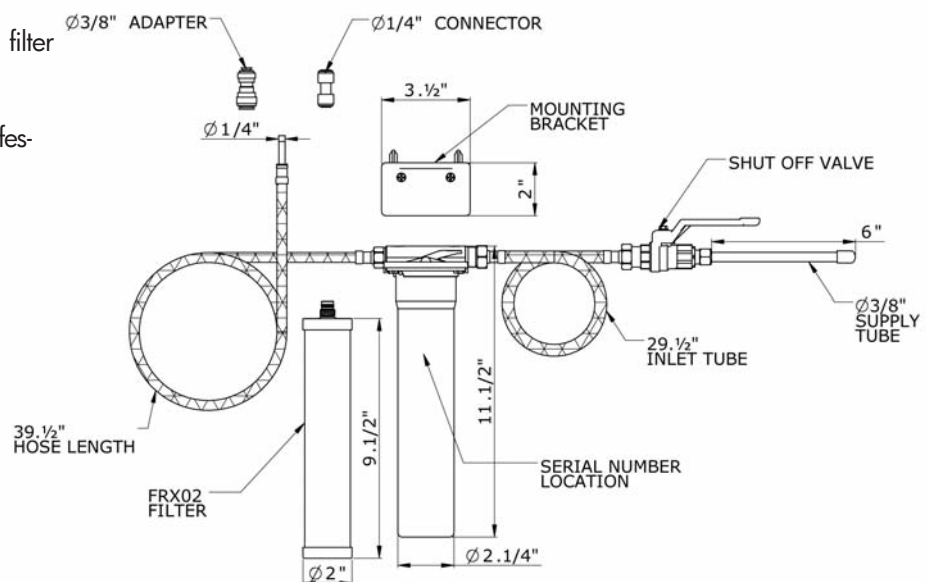

\* For CA/VT, place a "-2" at end of model number for code compliant product. (Example U.1812-2)


Consult your local ROHL showroom for additional information and specifications. For complete warranty details and a list of showrooms, go to [www.rohlhome.com](http://www.rohlhome.com).

## U.1812 Replacement Cartridge Instructions Page 1



### The Triflow Kitchen Collection Filter Replacement Guide

- U.1609 : MATRIKX PB+
- U.1802 : FRX02
- U.1818 : 5 MICRON PRE FILTER

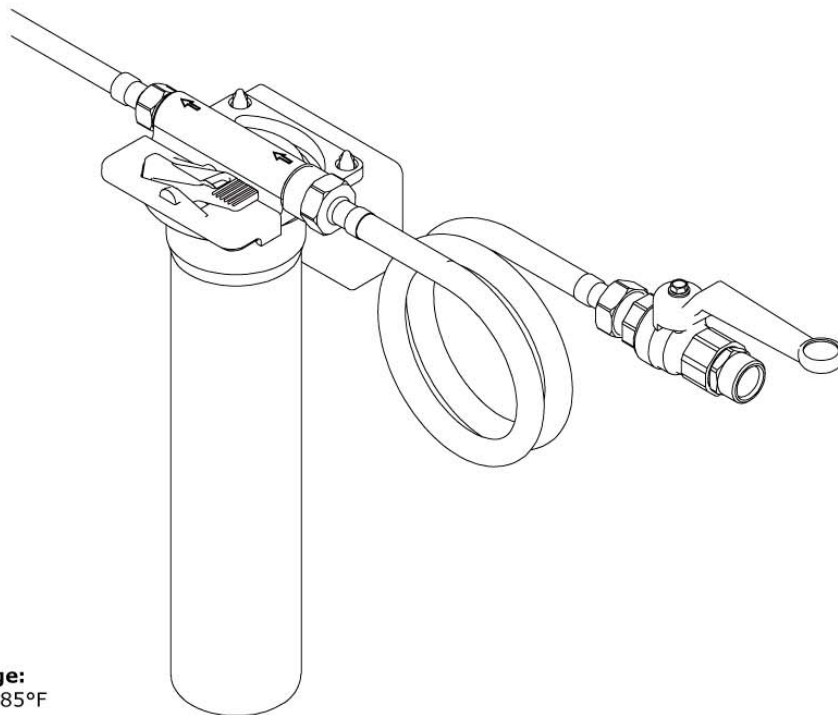

**Temp Range:**  
Max 85°C/185°F

**Recommended  
Working Pressure:**  
Min 1.7bar/25psi  
Max 5bar/75psi

**Please register your new product.  
Complete the enclosed registration card, or call Toll Free 1-800 787 1066**

## U.1812 Replacement Cartridge Instructions Page 2

### The Triflow Collection Filter Replacement Guide

#### IMPORTANT INFORMATION

The following instructions are for the filter replacement you are installing. Please read carefully to ensure correct installation.

Enclosed is the FRX02 FILTER for the replacement in the U.1812 Triflow Filter.

If you have a PRE-FILTER System, U.1816, then order U.1818 filter replacement.

In addition to the guide below it is essential that the written information overleaf is carefully read and understood.

#### Preparation for Installer

☐ Flush the plumbing system before installing the Kitchen product.

☐ Ensure you have the correct fittings to connect to the filter faucet.

**1**

Shut off mains supply. A stop valve was supplied with the system for this purpose, and will be located on the adjacent pipe work.

Turn the filtered lever on the faucet to the on position. This will confirm the water supply is off, and release the pressure in the system.

**2**

Lift the filter unit from its retaining bracket.

Holding the cap clip down rotate the housing a quarter turn and slide the housing down.

**3**

Slide the housing off the filter cartridge. Whilst holding the cap firmly unscrew the cartridge. Discard the cartridge with your house-hold waste, wrapped in news paper or placed in a polythene bag.

If space is restricted slide the housing down and then unscrew the cartridge, then remove both the cartridge and the housing together.

Wash the housing in warm soapy water, then rinse well.

**4**

**Only if necessary due to restricted access.**

Conveniently position a suitable receptacle to catch the residual water from the housing and remove hoses.

## U.1812 Replacement Cartridge Instructions Page 3


*Thank you for your continuing support of the Trilflow product.*

**5**



Take the new cartridge and wet the two 'O' seals on the threaded end of the cartridge.


**6**



Screw carefully into the female thread on the inside of the cap. Fit the housing back over the cartridge with a quarter turn.


Please Note: The cartridge is fragile and can be easily damaged if not handled carefully. Care should therefore be taken when screwing the cartridge into the housing cap. Be careful not to cross thread or over tighten the cartridge.

**7**

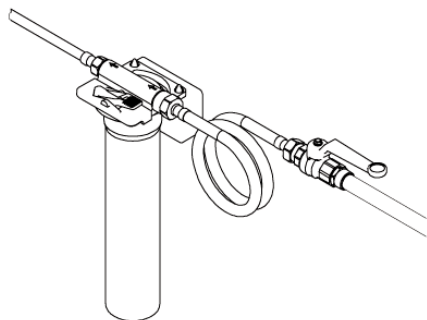

Replace the unit on the bracket, and (if removed) tighten the hoses onto the cap.

**8**

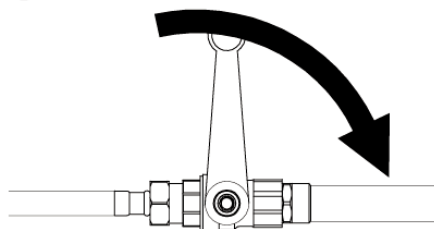

Turn on the main supply valve. Run the filtered water for 2 minutes to flush the system, and carefully check the system for leaks. The system is now ready for use.

### IMPORTANT NOTE

Do not use with water, that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

With a rated service capacity of 3406 litres (900 gallons) the U.1802 filter cartridge should be replaced every six months to ensure optimum performance.

### To Winterize the Unit

If you plan to be away from home for extended periods, or the filter housing maybe subject to the risk of freezing, carry out the procedures 1-2 as above. When the risk of freezing has subsided or you wish to use the system again open the main supply and allow the water to run for 2 minutes to flush the system, the system is now ready to use. Freezing will invalidate the warranty.

## U.1812 Replacement Cartridge Instructions Page 4

### ROHL WARRANTY POLICY


All products supplied by ROHL carry warranties against manufacturing defects.

Triflow products carry a Limited Lifetime Warranty.


ROHL LLC will provide free of charge, as its options, replacement part(s) or product (or a comparable alternative product) to replace those which have proven defective in materials or workmanship.

For full ROHL LLC WARRANTY please contact ROHL or visit [www.rohlhome.com](http://www.rohlhome.com)

### SPARES

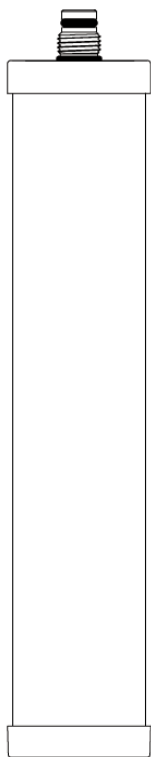

Replacement Filter FRX02  
U.1802 installed in the  
U.1812

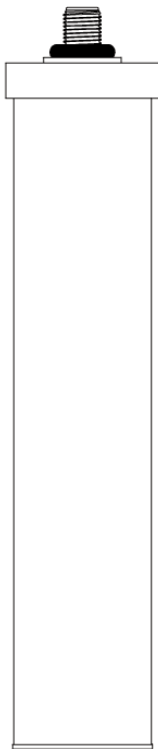

Replacement Pre Filter  
U.1818 installed in the  
U.1816



Replacement Filter Matrikx PB+  
U.1609 (High Grade)

### Cartridge Service

Triflow  
Suite 400,  
6325 Sandburg Road  
Minneapolis,  
MN 55427



Katadyn of Switzerland  
Exclusive manufacturers of the FRX02 Filter Cartridges for Triflow