



DECORATIVE TOILET SEAT

Bath Fixtures

RS2860

FEATURES


- Mahogany closed front with cover
- Solid Oak construction
- Piano finish – Durable prevents warping and cracking
- Non Corrosive hinge post and hardware
- Ring thickness: 1"
- Ring Thickness with Bumper: 1 3/8"
- Height of Seat with Cover: 2 3/4"

COLORS/FINISHES


- Polished Chrome
- Polished Nickel
- Satin Nickel
- Tuscan Brass
- Inca Brass
- Antico Brass
- English Bronze

WARRANTY

- Limited Lifetime

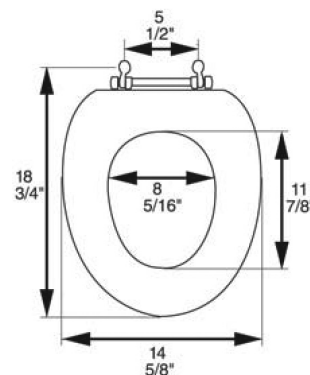

RS2860 INSTALLATION

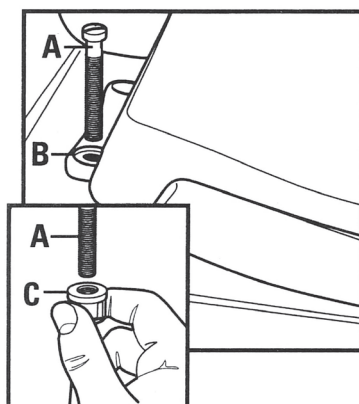

1. Carefully remove old seat.
 2. Place new toilet seat on toilet bowl.
 3. Make sure that the hinge bolts (A) are inserted through or connected to the seat hinge.
 4. Insert hinge bolts (A) through the holes in the rear of the toilet bowl.
 5. Place the nuts (C) on the hinge bolts (A) and tighten until the nut is firmly seated.
- Important:** Do not over tighten the nuts as this could crack the toilet bowl.

CLEANING INSTRUCTIONS

IMPORTANT INSTRUCTIONS FOR MAINTAINING THE FINISH

When cleaning your toilet seat, wash it only with mild, soapy water. Rinse the seat thoroughly with clean water and dry with a soft cloth. This will help keep your seat looking new for years to come. **NEVER** use abrasive scouring powders or detergents, disinfectants or cleaning products in aerosol cans as they can damage your seat's lustrous finish. In addition, some bathroom chemicals and cosmetic products may damage the seat's finish so use proper caution.