



BER33, BER36
ASSEMBLY INSTRUCTIONS

PARTS LIST


NO.	Description	QTY
A	SIDE PANEL	2
B	BACK PANEL	2
C	TOP&BOTTOM PANEL	1
D	TOE KICK	1
E	TOE KICK	1
F	FACE FRAME	1
G	FACE FRAME	1
H	CONNECT STRIP	1
I	BACK PANEL	1
J	ADJUSTABLE SHELF	1
K	CABINET'S DOOR	2

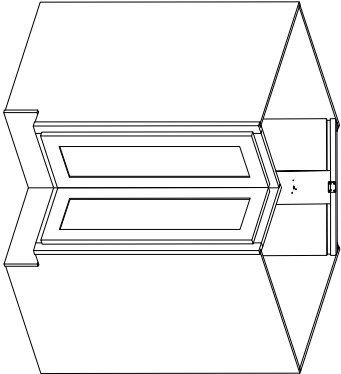


STEP:1




STEP:2




STEP:3




STEP:4

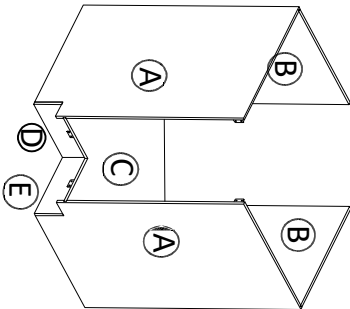


STEP:5




STEP:6



STEP:7



STEP:8



STEP:10STEP:9

- STEP 1: Joint right side panel with right back panel
STEP 2: Fix the bottom panel on
STEP 3: Joint right side panel with right back panel
STEP 4: Attach toe-kick on
STEP 5: turn the carcass stand
STEP 6: Insert back panel through the groove
STEP 7: Attach face frame(long and short), then screw up
STEP 8: Attach top connect strip using screw and install blastic block
STEP 9: Hinge the door onto the face frame and adjust the cover-space

11	136 DEGREE HINGE	2	
10	3/4" ROUND HEAD SCREW	8	
9	BUMPER	4	
8	165 DEGREE HINGE	2	
7	SHELF CLIP	6	
6	9/16"ROUND HEAD SCREW 72		
5	DOWEL	6	
4	1"FLAT HEAD SCREW FOR CARCASS	11	
3	CLEAT	18	
2	WOOD BLOCK	4	
1	9/16" flat head screw	8	
NO.	Description	QTY	PICTURE

HARDWARE LIST