


FEATURES

- Single threshold for alcove installation.
- Low front threshold shower base for tile can be recessed into floor for even a lower threshold.
- Select from center drain or end drain location.
- For end drain location must order either LH or RH drain.
- Light weight SMC sheet molding compound material.
- Installation for new and existing construction.
- Integral tiling flange for a waterproof installation.
- Easy installation. Level with thinset mortar mix.
- Self supporting.
- Linear drains can be used in this base.
- Includes shower drain with polished stainless steel drain cover.
- 10 Year Limited Residential Warranty / 3 Year Commercial Warranty.

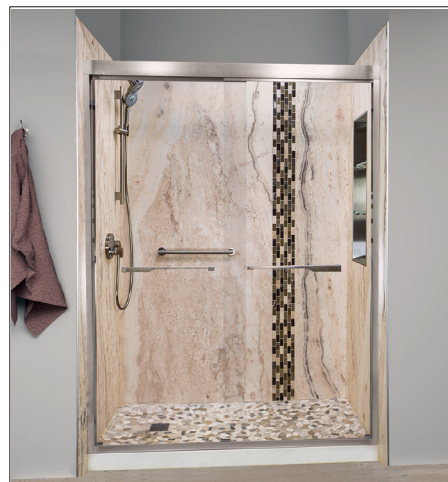

	Model	A	B	C	D	Wt.
☐	SMFTT4940C	49"	40½"	18½"	22¾"	61.6
☐	SMFTT6030C	60"	30"	13½"	16½"	57.2
☐	SMFTT6032C	60"	32"	14½"	17½"	61.6
☐	SMFTT6034C	60"	34"	15½"	18½"	66
☐	SMFTT6036C	60"	36"	16½"	19½"	70.4
☐	SMFTT6030R/L	60"	30"	13½"	16½"	57.2
☐	SMFTT6032R/L	60"	32"	14½"	17½"	61.6
☐	SMFTT6034R/L	60"	34"	15½"	18½"	66
☐	SMFTT6036R/L	60"	36"	16½"	19½"	70.4

Center Drain Models



End Drain Models




Compliance Certifications


Meets or Exceeds the Following Specification

- IGC 154-2012
- ASME A112.18.1 / CSA B125.125.1-11
- IAPMO 
- cUPC®

Center Drain Models

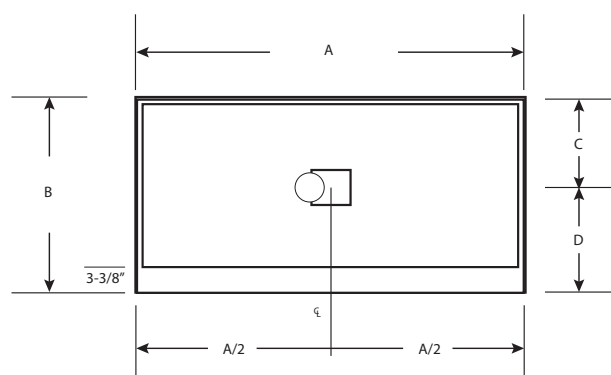

Left Drain Models

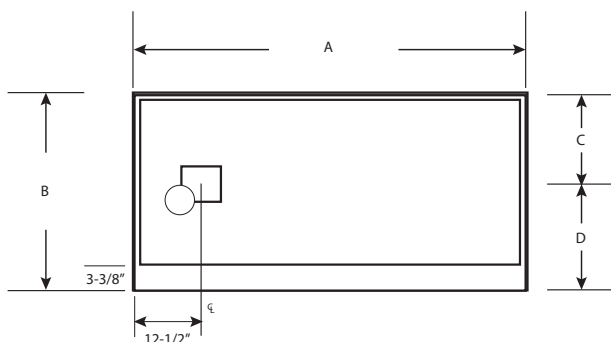

Right Drain Models

