


Features


- Zero threshold, curbless shower base
- Size: 72" x 48"
- Materials: Compression molded glass-fiber reinforced plastic (GRP) base, stainless-steel drain cover, PVC drain connector
- Weight Capacity: 840lbs when installed on 16" o.c. joist systems supplemented with perimeter and drain hole blocking
- Gradient: $\geq 1\%$ per foot; single continuous pitch directs water flow towards drain
- Perimeter: 1-1/8" thick
- Spans 16" o.c. joist systems
- Drain hole diameter: 2"
- Standard 2" PVC drain connector supplied
- Tileable linear drain cover supplied and runs the width of the base
- Waffle design on the underside of the base increases strength
- Can install multiple adjacent bases to create a larger showering area
- Install on wood, engineered joist systems, subfloor, or concrete
- Suitable for use with underfloor heating
- Can be finished with tile or stone
- Installation for new and existing construction
- Complete installation with a Samuel Mueller waterproofing kit
- 10 Year Limited Residential Warranty / 3 Year Commercial Warranty

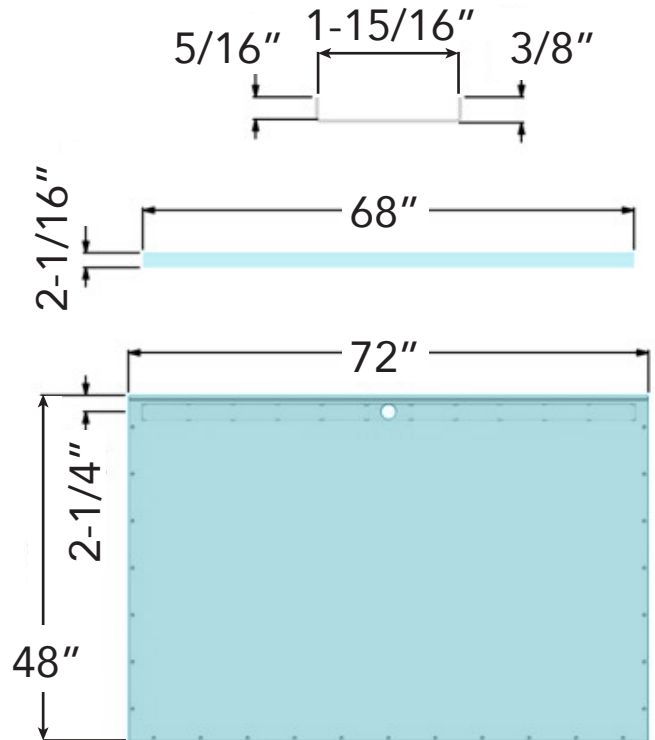

SHOWER BASES

Specified Model

	Model No.	L	W	C	D	Wt. (lbs)
<input type="checkbox"/>	SMFWL7248	72"	48"	17 ²³ / ₃₂ "	13 ²⁵ / ₃₂ "	106

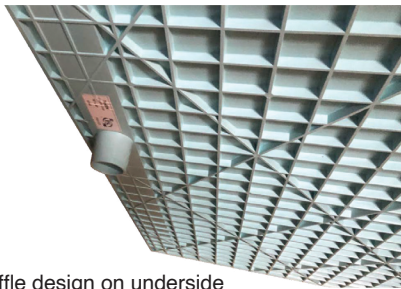

Waffle design on underside

Compliance Certifications -

- 2015, 2012 and 2009 International Residential Code® (IRC)
- 2015, 2012 and 2009 International Plumbing Code® (IPC)
- 2015, 2012 and 2009 Uniform Plumbing Code® (UPC)
- 2010 and 2005 National Plumbing Code of Canada (NPC)
- IAPMO PS106-2015e1 for prefabricated, tileable shower receptors
- CSA B45.5/IAPMO Z124-2011, Plastic Plumbing Fixtures 