



## FEATURES

- Siphonic jet dual flushing system (1.08GPF/4.1LPF and 1.45GPF/5.5LPF)
- Multifunction smart wireless remote control
- Automatic pre-wetting inner bowl to minimize debris from sticking to the surface
- Heated seat with 5 levels of temperature control (range: 86°F - 100.4°F)
- Water pressure adjustment at 5 different levels
- Water temperature adjustment at 5 different levels (range: 86°F - 102.2°F)
- 4 wash options: rear, lady, massage, and pulse
- Self-cleaning nozzle before and after use with 5 levels of adjustable spray position
- Warm air drying in fixed position with 5 levels of air temperature adjustment (range: 86°F - 122°F)
- Automatic deodorization, Automatic open/close lid, & Automatic flush
- Side controls provide backup manual flush
- Night light & Ambient light
- UV sterilization
- Seat sensor (functions activated by sitting on the seat)
- Laser wave sensor open/close lid/seat and flush
- LED display
- 17-9/16" seat height is ADA compliant
- Damper in seat and cover allow them to close softly
- Tankless instant water heating
- 3.94 ft. power cord
- Built-in booster pump delivers a steady 0.09MPa of water pressure
- Backup power available
- Ceramic bidet toilet body, polypropylene seat, and stainless steel + ABS nozzle
- 5-Year Limited Residential Warranty / 1-Year Commercial Warranty



## Smart Bidet Models

	Model No.	Description	Length	Width	Height	Ship Wt.(lbs)
COMPLETE SMART BIDET TOILET						
<input type="checkbox"/>	SMVSB-01	Bidet toilet with slow closing seat and lid	28¼"	16¼"	20 <sup>13</sup> / <sub>16</sub> "	102.9

## To Be Specified: Color

<input type="checkbox"/>	01 White
--------------------------	----------

## Certifications & Compliance:

UPC and NPC compliant  
IAPMO R&T certified

Complies with:




- ASME A112.4.2-2021 / CSA B45.16-2021
- ASME A112.19.2-2018 / CSA B45.1-18
- ASME A112.18.1-2018 / CSA B125.1-18

## Compliance Certifications -

### Meets or Exceeds the Following Specification



Meets the Americans with Disabilities Act guidelines and ANSI A117.1 requirements for accessible and usable building facilities-check local codes when installed per accessibility guidelines of the act.

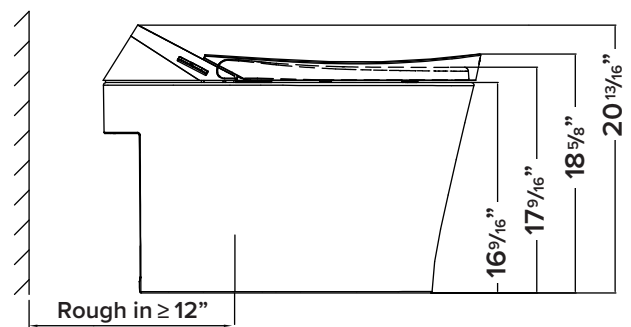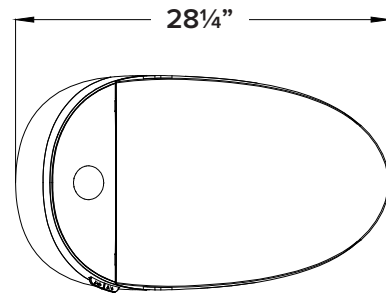

This toilet is designed to rough-in at a minimum dimension of 12" from finished wall to C/L of outlet. Supply not included with fixture and must be ordered separately.

Dimensions are nominal and are subject to change without prior notice. Dimension shown for location of supply suggested. For additional information refer to installation instructions supplied.