


# **STRATUS Bypass Shower Door SMSBP-**

#### **FEATURES**

- An attractive, semi-frameless smooth sliding Bypass shower door that features a special Nano Protected surface treatment that keeps glass looking clean.
- Up to 1" adjustment per side and 2" overall for out-of-plumb (uneven) walls within wall profiles.
- Walk-in opening: 19-1/2" to 21-1/2" for 48" width door and 25-1/2" to 27-1/2" for 60" width door.
- $\bullet$  Clearance height: 56-7/8" for 60" height door and 74-7/8" for 78" height door.
- · Tempered glass is ANSI Z97.1. certified.
- · Glass thickness: 5/16" (8mm) available in Clear and Full Frost.
- · Frame is made from aluminum.
- Hardware finishes: Polished Chrome, Brushed Stainless, Champagne Bronze, and Matte Black.
- ${\boldsymbol{\cdot}}$  Shower base threshold minimum requirement is 2" wide.
- $\boldsymbol{\cdot}$  Doors come with a pair of 1" (25mm) diameter round tube bypass handles.
- · Easy to install.
- IMPORTANT! All measurements should be taken only AFTER walls are finished (tile, back walls, etc.); Professional installation recommended.
- · Limited Lifetime Warranty for residential and 1 year for commercial.

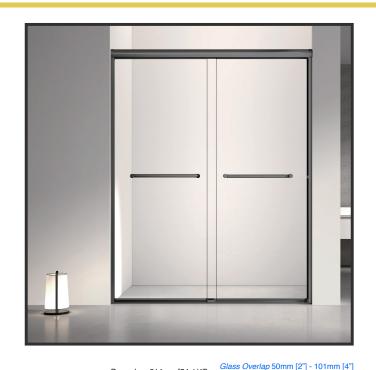


Door glass 614mm [24-1/4"] 767mm [30-1/4"]

## **Specify Model**

| Size  | Model         | Glass        | Width | Height | Weight<br>(lbs) |
|-------|---------------|--------------|-------|--------|-----------------|
| 48X78 | SMSBP487808C- | Clear (8 mm) | 48"   | 78"    | 85              |
| 48X78 | SMSBP487808F- | Frost (8 mm) | 48"   | 78"    | 85              |
| 60X60 | SMSBP606008C- | Clear (8 mm) | 60"   | 60"    | 95              |
| 60X60 | SMSBP606008F- | Frost (8 mm) | 60"   | 60"    | 95              |
| 60X78 | SMSBP607808C- | Clear (8 mm) | 60"   | 78"    | 120             |
| 60X78 | SMSBP607808F- | Frost (8 mm) | 60"   | 78"    | 120             |

### To Be Specified : Hardware Color





Chrome







**Brushed Stainless** 

Champagne **Bronze** 

Matte **Black** 

#### To Be Specified: Glass







