

Ludington®

32" undermount double-bowl kitchen sink 32024

Features

- 36" (914 mm) minimum base cabinet width
- Double-equal bowls
- 5-1/2" (140 mm) depth
- No faucet holes; requires wall- or counter-mount faucet
- Rear drains increase workspace in the sink and storage space underneath
- Includes installation hardware
- Sink drain with strainer sold separately

Material

Premium 18-gauge stainless steel

Installation

Undermount

Recommended Products/Accessories

7400 Stainless Steel Sink Drain and Strainer K-23726 Drain treatment K-23729 Stainless steel cleaner

Optional Products/Accessories

K-6641 Stainless steel sink rack



ADA

Codes/Standards


ASME A112.19.3/CSA B45.4 ADA ICC/ANSI A117.1 IAPMO Certification


STERLING® Stainless Steel Sinks Lifetime Limited Warranty

See website for detailed warranty information.


Ludington®


32" undermount double-bowl kitchen sink 32024

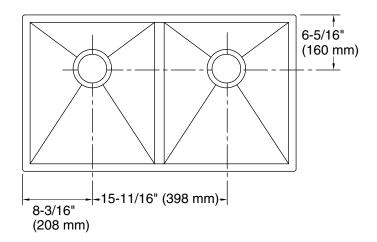



Recommended ADA Installation





Technical Information

All product dimensions are nominal.

Bowl configuration: Double equal

Min. base cabinet

36" (914 mm)

width:

Bowl area (Left): Length: 16-9/16" (420 mm)

Width: 14-9/16" (370 mm)

Bowl depth: 5-7/16" (138 mm)

Bowl area (Right): Length: 16-9/16" (420 mm)

Width: 14-9/16" (370 mm)

Bowl depth: 5-7/16" (138 mm)

Drain hole: 3-3/4" (94 mm)

Template: Undermount, 1298947-7, required,

included

Notes

Install this product according to the installation instructions.

ADA compliant when installed to the specific requirements of these regulations.