



Valton®

Two-piece elongated dual-flush toilet

402318

Features

- Two-piece design
- Elongated bowl offers added room and comfort
- Top-mount dual-flush actuator offers a choice of 1.0 or 1.28 gpf (3.8 or 4.8 lpf)
- 2" (51 mm) fully glazed trapway
- Combination consists of the 403378 bowl and 404553 tank
- Dual-flush technology allows you to choose between a full or partial flush
- Pro Force® Plus flushing technology delivers greater flushing power than previous Pro Force® models

Installation

- Standard 12" (305 mm) rough-in
- Three-bolt quick-connect installation
- Seat and supply line sold separately

Recommended Products/Accessories

K-20110 Brevia™ Quiet-Close™ elongated toilet seat
K-5420 Low-Profile Bolt Caps
K-23726 Drain treatment
K-186 Dual Flush Actuator

Included Components

403378 Elongated toilet bowl
404553 Toilet tank



Codes/Standards

ASME A112.19.2/CSA B45.1
ASME A112.19.14
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
IAPMO Certification


STERLING® Toilet Limited Warranty


See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------

	0	White
---	---	-------

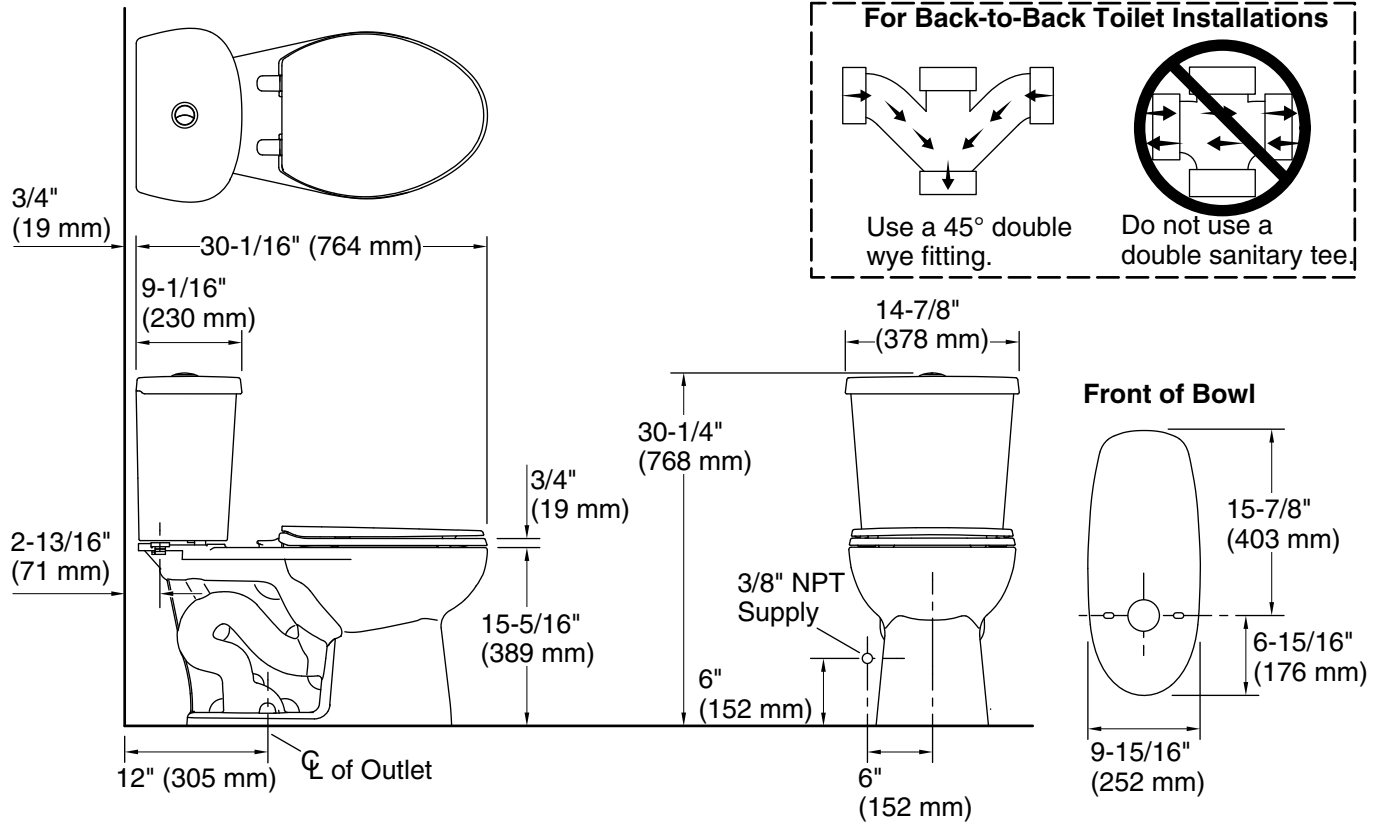

Technical Information

All product dimensions are nominal.

Toilet type:	Floor-mount
Waste Outlet:	Floor
Bowl shape:	Elongated
Flush type:	Gravity siphon jet
Trap passageway:	2" (51 mm)
Rim to water surface:	5" (127 mm)
Rough-in:	12" (305 mm)

Fixture Supply Requirements

Min static pressure:	15 psi (103.4 kPa)
Max static pressure:	80 psi (551.6 kPa)

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.