

## Windham™

# Two-piece elongated 1.28 gpf chair height toilet 402322-RA

#### **Features**

- Two-piece design
- Elongated bowl offers added room and comfort
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- 1.28 gpf (4.8 lpf)
- Right-hand Polished Chrome trip lever
- 2-1/8" (54 mm) fully glazed trapway
- Combination consists of 403317 bowl and 402362-RA tank
- Pro Force® Plus flushing technology delivers greater flushing power than previous Pro Force® models

### Installation

- Three-bolt quick-connect installation
- Standard 12" (305 mm) rough-in
- Seat and supply line sold separately


### Recommended Products/Accessories

K-20110 Brevia<sup>™</sup> Quiet-Close<sup>™</sup> elongated toilet seat K-9466-R Right-Hand Trip Lever K-5420 Low-Profile Bolt Caps K-23726 Drain treatment

## **Included Components**

403317 Elongated chair height toilet bowl 402362-RA Toilet tank





## Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC IAPMO Certification

## STERLING® Toilet Limited Warranty

See website for detailed warranty information.

#### Available Colors/Finishes

Color tiles intended for reference only.


**Color Code Description** 

0 White



# Windham™

# Two-piece elongated 1.28 gpf chair height toilet 402322-RA

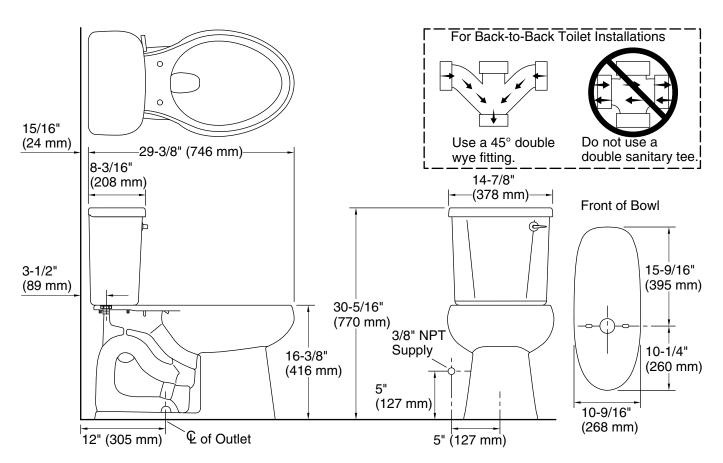

#### **Technical Information**

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor

Bowl shape: Elongated
Flush type: Siphon jet
Trap passageway: 2-1/8" (54 mm)

Water surface size: 9-1/2" x 7" (241 mm x 178 mm)

Rim to water 6-1/2" (165 mm)

surface:

Rough-in: 12" (305 mm) Seat-mounting 5-1/2" (140 mm)

holes:

## **Notes**

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.