



# Windham™

## Two-piece elongated 1.6 gpf chair height toilet

### 402325-RA

#### Features

- Two-piece design
- Elongated bowl offers added room and comfort
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- 1.6 gpf (6.0 lpf)
- Right-hand Polished Chrome trip lever
- 2-1/8" (54 mm) fully glazed trapway
- Combination consists of 403317 bowl and 402363-RA tank
- Pro Force® Plus flushing technology delivers greater flushing power than previous Pro Force® models

#### Installation

- Three-bolt quick-connect installation
- Standard 12" (305 mm) rough-in
- Seat and supply line sold separately

#### Recommended Products/Accessories

K-20110 Brevia™ Quiet-Close™ elongated toilet seat  
K-9466-R Right-Hand Trip Lever  
K-5420 Low-Profile Bolt Caps  
K-23726 Drain treatment

#### Included Components

403317 Elongated chair height toilet bowl  
402363-RA Toilet tank



ADA

CSA B651

OBC

#### Codes/Standards

ASME A112.19.2/CSA B45.1  
DOE - Energy Policy Act 1992  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC  
IAPMO Certification

#### STERLING® Toilet Limited Warranty

See website for detailed warranty information.

#### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------



0

White

1-800-STERLING (1-800-783-7546)


Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.sterlingplumbing.com](http://www.sterlingplumbing.com).

12-26-2023 20:18 - US/CA



Two-piece elongated 1.6 gpf chair height toilet  
**402325-RA**

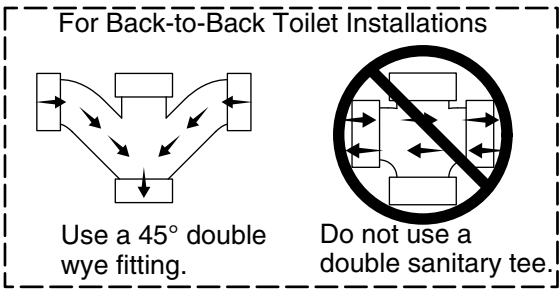

All product dimensions are nominal.

## Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.