



# Windham™

## Two-piece elongated 1.28 gpf chair height toilet

### 402369

#### Features

- Two-piece design
- Elongated bowl offers added room and comfort
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- 1.28 gpf (4.8 lpf)
- 2-1/8" (54 mm) fully glazed trapway
- Pro Force® Plus flushing technology delivers greater flushing power than previous Pro Force® models

#### Installation

- Three-bolt quick-connect installation
- 14" (356 mm) rough-in
- Seat and supply line sold separately

#### Recommended Products/Accessories

K-20110 Brevia™ Quiet-Close™ elongated toilet seat  
K-5420 Low-Profile Bolt Caps

#### Included Components

402365 1.28 gpf toilet tank  
403317 Elongated chair height toilet bowl



ADA	CSA B651	OBC
-----	----------	-----

#### Codes/Standards

ASME A112.19.2/CSA B45.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC  
IAPMO Certification


#### STERLING® Toilet Limited Warranty


See website for detailed warranty information.

#### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------

	0	White
---	---	-------

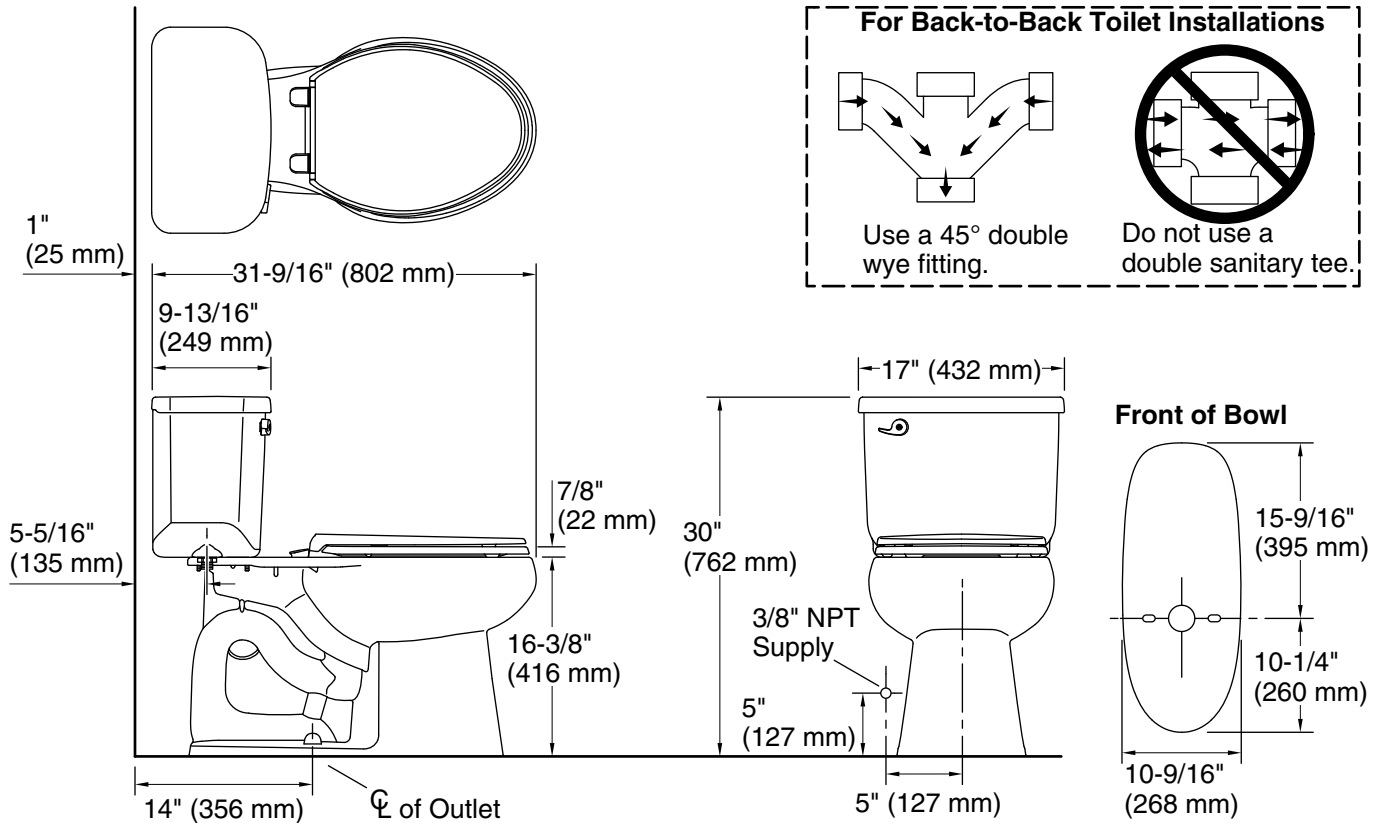

### Technical Information

All product dimensions are nominal.

Toilet type:	Floor-mount
Waste Outlet:	Floor
Bowl shape:	Elongated
Flush type:	Gravity siphon jet
Trap passageway:	2-1/8" (54 mm)
Rim to water surface:	6-3/16" (157 mm)
Rough-in:	14" (356 mm)

### Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.