



**Stinson®**  
Two-piece elongated chair height toilet  
**402396**

**Features**

- Two-piece design
- Elongated bowl offers added room and comfort
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- 1.28 gpf (4.8 lpf)
- 2" (51 mm) fully glazed trapway
- Floor Saver® footprint helps cover the old footprint left by many standard two-piece toilets
- Pro Force® Plus flushing technology delivers greater flushing power than previous Pro Force® models

**Installation**

- Standard 12" (305 mm) rough-in
- Three-bolt quick-connect installation
- Supply line sold separately

**Recommended Products/Accessories**

K-20466 Stonewood® Quiet-Close™ elongated toilet seat  
K-20110 Brevia™ Quiet-Close™ elongated toilet seat  
K-5420 Low-Profile Bolt Caps  
K-23726 Drain treatment

**Included Components**

403316 Elongated chair height toilet bowl  
404558 Toilet tank



**ADA** **CSA B651** **OBC**

**Codes/Standards**

ASME A112.19.2/CSA B45.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC  
IAPMO Certification

**STERLING® Toilet Limited Warranty**


See website for detailed warranty information.

**Available Colors/Finishes**

*Color tiles intended for reference only.*

**Color** **Code** **Description**

 0 White

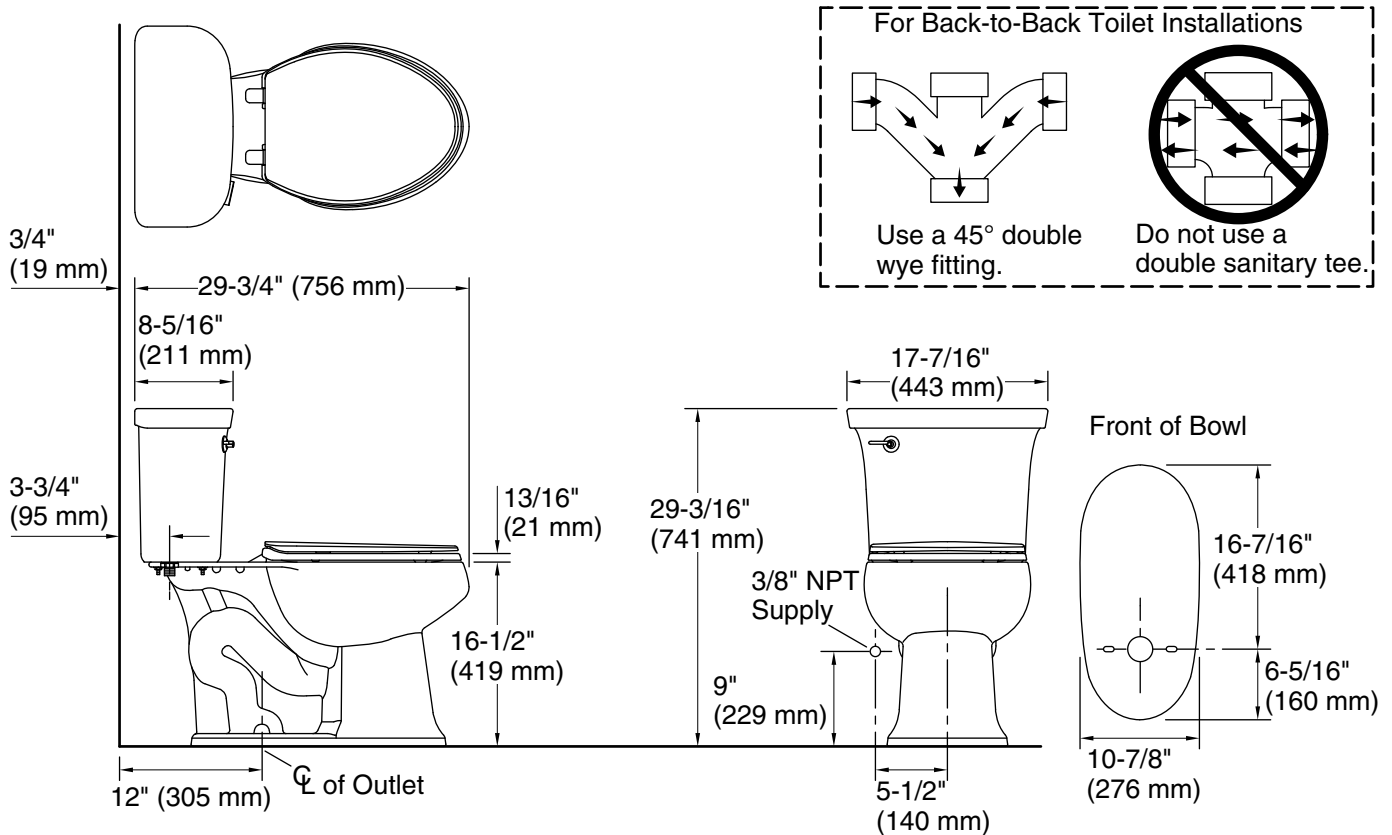

### Technical Information

All product dimensions are nominal.

Toilet type:	Floor-mount
Waste Outlet:	Floor
Bowl shape:	Elongated
Flush type:	Gravity siphon jet
Trap passageway:	2" (51 mm)
Rough-in:	12" (305 mm)

### Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.