



Stinson®

Two-piece elongated chair height toilet

402396-RA

Features

- Two-piece design
- Elongated bowl offers added room and comfort
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- 1.28 gpf (4.8 lpf)
- 2" (51 mm) fully glazed trapway
- Right-hand Polished Chrome trip lever
- Floor Saver® footprint helps cover the old footprint left by many standard two-piece toilets
- Pro Force® Plus flushing technology delivers greater flushing power than previous Pro Force® models

Installation

- Standard 12" (305 mm) rough-in
- Three-bolt quick-connect installation
- Supply line sold separately

Recommended Products/Accessories

K-20110 Brevia™ Quiet-Close™ elongated toilet seat
K-20466 Stonewood® Quiet-Close™ elongated toilet seat
K-5420 Low-Profile Bolt Caps
K-23726 Drain treatment

Included Components

403316 Elongated chair height toilet bowl
404558-RA Toilet tank



ADA	CSA B651	OBC
-----	----------	-----

Codes/Standards

ASME A112.19.2/CSA B45.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OBC
IAPMO Certification


STERLING® Toilet Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------


	0	White
---	---	-------

1-800-STERLING (1-800-783-7546)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.sterlingplumbing.com.

12-26-2023 20:12 - US/CA

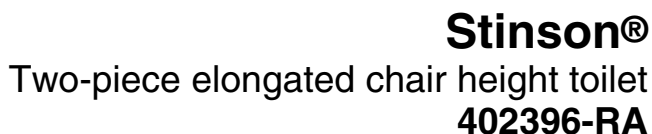

Toilet type:	Floor-mount
Waste Outlet:	Floor
Bowl shape:	Elongated
Flush type:	Gravity siphon jet
Trap passageway:	2-7/8" (73 mm)
Rough-in:	12" (305 mm)

Notes

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.