

Finesse[®] Quick-Install[®]

Frameless Sliding Bath Door 5325EZ-59

Features

- Complete door installs within minutes.
- Pre-installed rollers for smooth, silent operation.
- Frameless design highlights showering area.
- Frameless, 1/4" (6 mm) thick tempered glass.
- Center-guided mechanism for smooth, quiet sliding action and easy cleaning.
- CleanCoat[®] technology creates a barrier between the water and glass to help keep your shower door looking new.
- Wide variety of finishes and glass patterns.
- Inside and outside towel bars complete the look of this door.

Material

- Anodized aluminum prevents rusting or corrosion.
- Tempered glass ensures maximum safety and durability.

Installation

- Out-of-plumb adjustability allows for simpler installation.
- Can be installed to open to the left or right.
- Quick Install[®] compression fit technology means no cutting or drilling needed.

Components

Additional included component/s: Hardware kit, and hex wrench.



Codes/Standards

ANSI Z97.1 (Tempered Glass) CPSC 16CFR 1201

STERLING[®] Warranty - Bath and Shower Doors

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color Code Description

DR	Deep Bronze
DR	Deep Bronze
Ν	Nickel
Ν	Nickel
S	Silver
S	Silver


Available Glass Options Code Description

> Clear Lake Mist™

Finesse[®] Quick-Install[®]

Frameless Sliding Bath Door 5325EZ-59



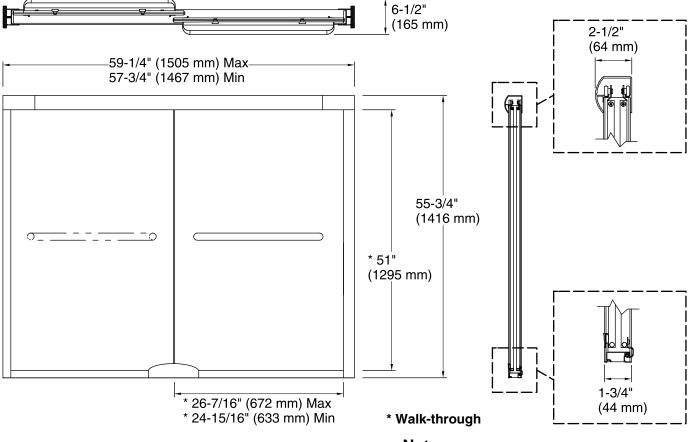

Technical Information

All product dimensions are nominal.Installation type:For bath installationOpening Width - Min:57-3/4" (1467 mm)Opening Width - Max:59-1/4" (1505 mm)Walk-through - Min:24-15/16" (633 mm)Walk-through - Max:26-7/16" (672 mm)Glass thickness:1/4" (6 mm)

Notes

Install this product according to the installation guide.

The vertical opening should be a minimum of 57-3/4" (1467 mm) to allow for installation clearance.