

Features

- Vertical blade handles complete the look of this door.
- CleanCoat® technology creates a barrier between the water and glass to help keep your shower door looking new.
- Frameless, 5/16" (8 mm) thick tempered glass door.
- Frameless design emphasizes glass and creates a sleek, minimalist look.
- Smooth, easy-to-clean wall jambs.

Material

- Anodized aluminum hardware prevents rusting or corrosion.

Installation

- Out-of-plumb adjustability allows for simpler installation.
-
-
- Can be installed to open to the left or right.

Components

Additional included component/s: Hardware kit.



Codes/Standards

ASTM C1036
ASTM C1048
ANSI Z97.1 (Tempered Glass)
CPSC 16CFR 1201


STERLING® Warranty - Bath and Shower Doors

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|--|------|-------------|
| | DR | Deep Bronze |
| | DR | Deep Bronze |
| | N | Nickel |
| | N | Nickel |
|  | S | Silver |
|  | S | Silver |

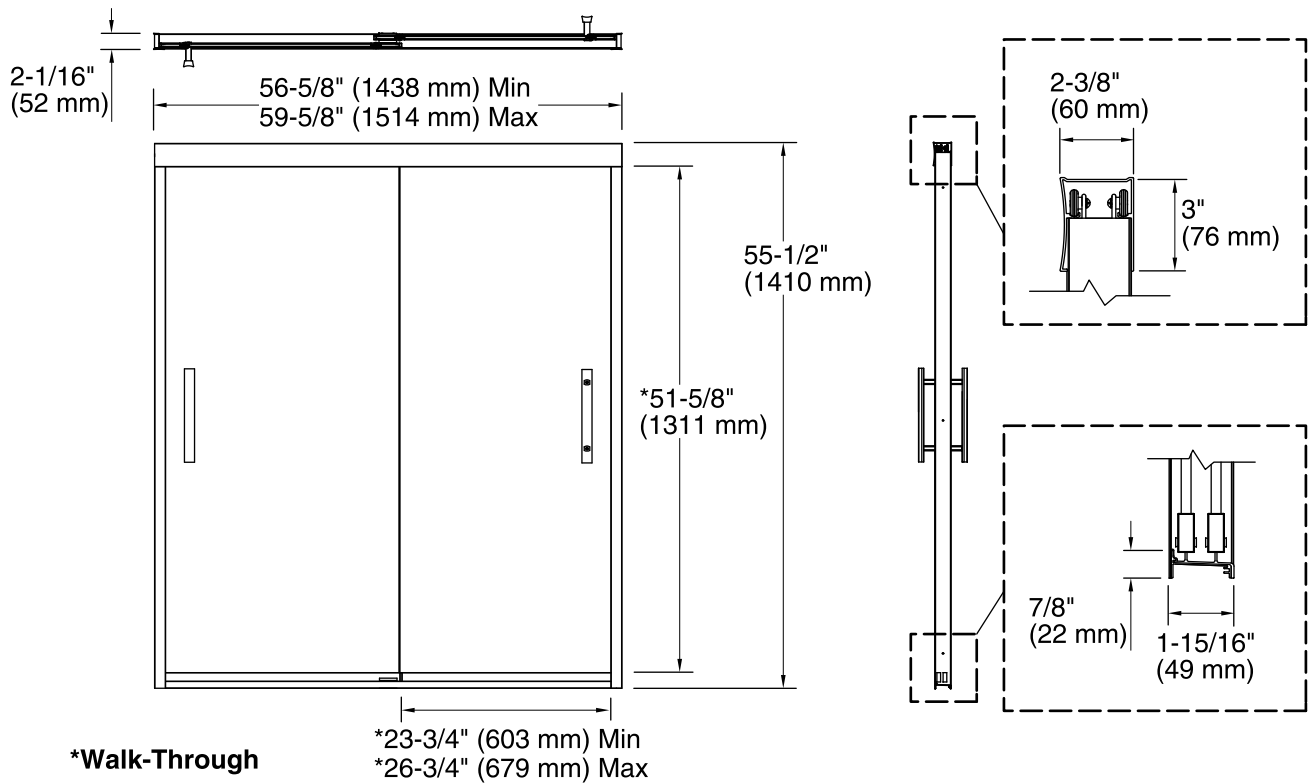

Technical Information

All product dimensions are nominal.

Installation type: For bath installation

Opening style: Sliding/Bypass

Opening Width - Min: 56-5/8" (1438 mm)

Opening Width - Max: 59-5/8" (1514 mm)

Walk-through - Min: 23-3/4" (603 mm)

Walk-through - Max: 26-3/4" (679 mm)

Glass thickness: 5/16" (8 mm)

Notes

Install this product according to the installation guide.

NOTICE: The vertical opening should be a minimum of 58" (1473 mm) to allow clearance for installation.