

Technology

- Frameless, 1/4-inch-thick (6mm) clear tempered glass.
- Magnetic seal keeps door firmly closed, providing excellent water containment.
- Knob handle keeps the design line simple and unobstructed.
- Low threshold (1-3/4-inch) for easy entry and exit.
- Adjustable ball catch for reliable operation.
- CleanCoat® nanotechnology helps prevent bacteria, mildew and water stains on your glass, making it easy to clean and looking new.
- Available in Silver (S) finish.
- Door swings outward and can be installed to open right or left, depending on your preference.
- Pre-assembled frame and out-of-plumb adjustability for simple installation with no cutting.
- 1-inch width adjustability on each wall jamb, offering 2-inch total adjustability.

Installation

- Not for use in hospitality.
- For residential use only.

Optional Products/Accessories

1296811 Whiston™ Door Filler Jamb

Included Components

Additional Components:
Hardware kit



Codes/Standards

ANSI Z97.1
CPSC 16CFR 1201

STERLING® Warranty - Bath and Shower Doors

See website for detailed warranty information.


Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	S	

Available Glass Options

Code	Description
G05	Clear

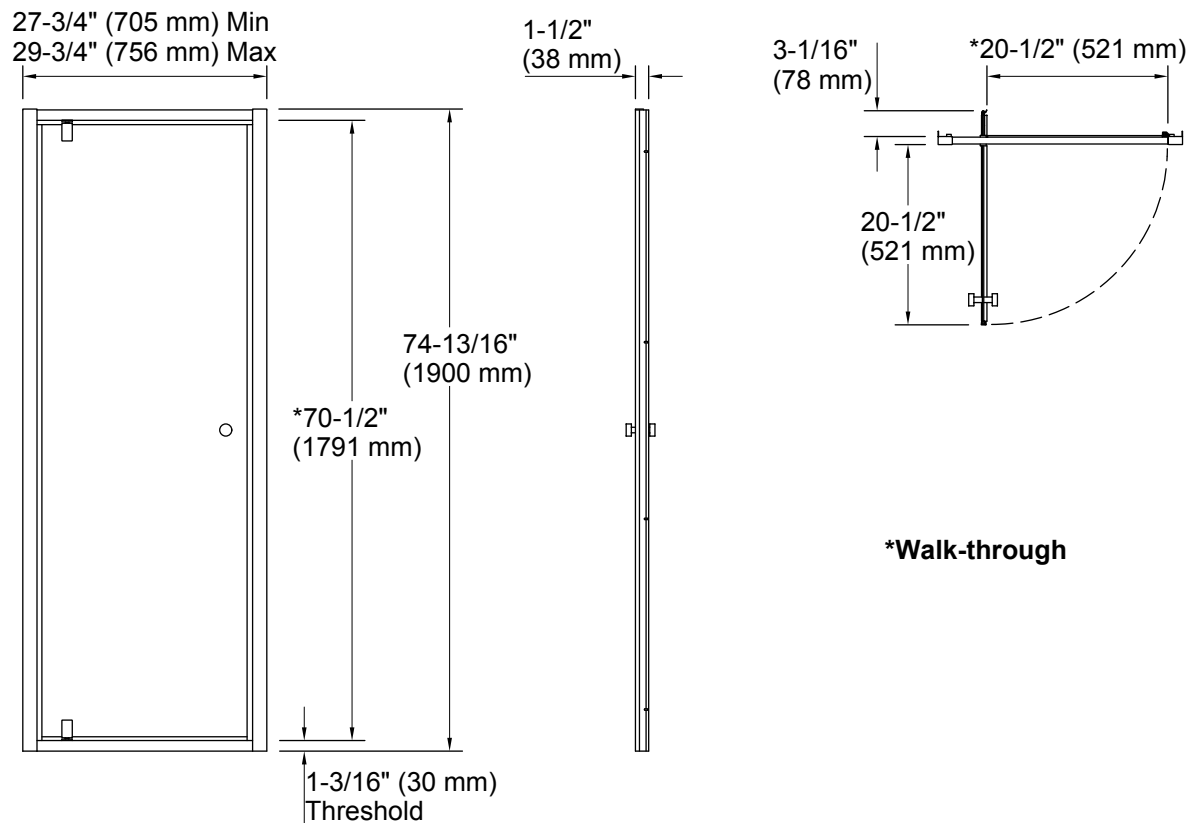

Technical Information

All product dimensions are nominal.

Installation type: For shower base installation

Opening Width - Min: 27-3/4" (705 mm)

Opening Width - Max: 29-3/4" (755 mm)

Walk-through - Min: 19-7/8" (505 mm)

Walk-through - Max: 19-7/8" (505 mm)

Glass thickness: 1/4" (6 mm)

Glass coating: CleanCoat®

Notes

Install this product according to the installation instructions.

The vertical opening should be a minimum of 75" (1905 mm) to allow for installation clearance.