



Ensemble™

60" x 30" Vikrell® bath, left above-floor drain
71171112



Features

- 18-3/4" (476 mm) apron
- 3" (76 mm) drain-to-floor clearance for above-floor drain installation
- Suitable for tile-down applications

Material


- Made from solid Vikrell® material for strength, durability, and lasting beauty

Installation

- Alcove
- Left drain

Recommended Products/Accessories

K-23726 Drain treatment
71374100 60" x 30" Vikrell® bath/shower wall set
71474100 60" x 30" Vikrell® bath/shower wall set
71574100 60" x 30" Vikrell® bath/shower wall set

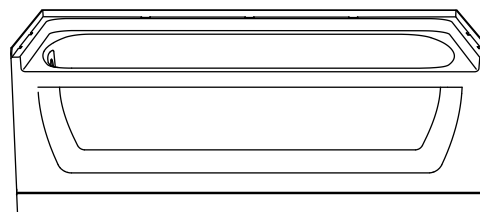

Codes/Standards

CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
ADA
ICC/ANSI A117.1
OBC
HUD, UM Bulletin 73

STERLING® Vikrell® or Acrylic Baths and Shower Bases Ten-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------


	0	White
---	---	-------

1-800-STERLING (1-800-783-7546)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.sterlingplumbing.com.

6-17-2026 20:55 - US/CA

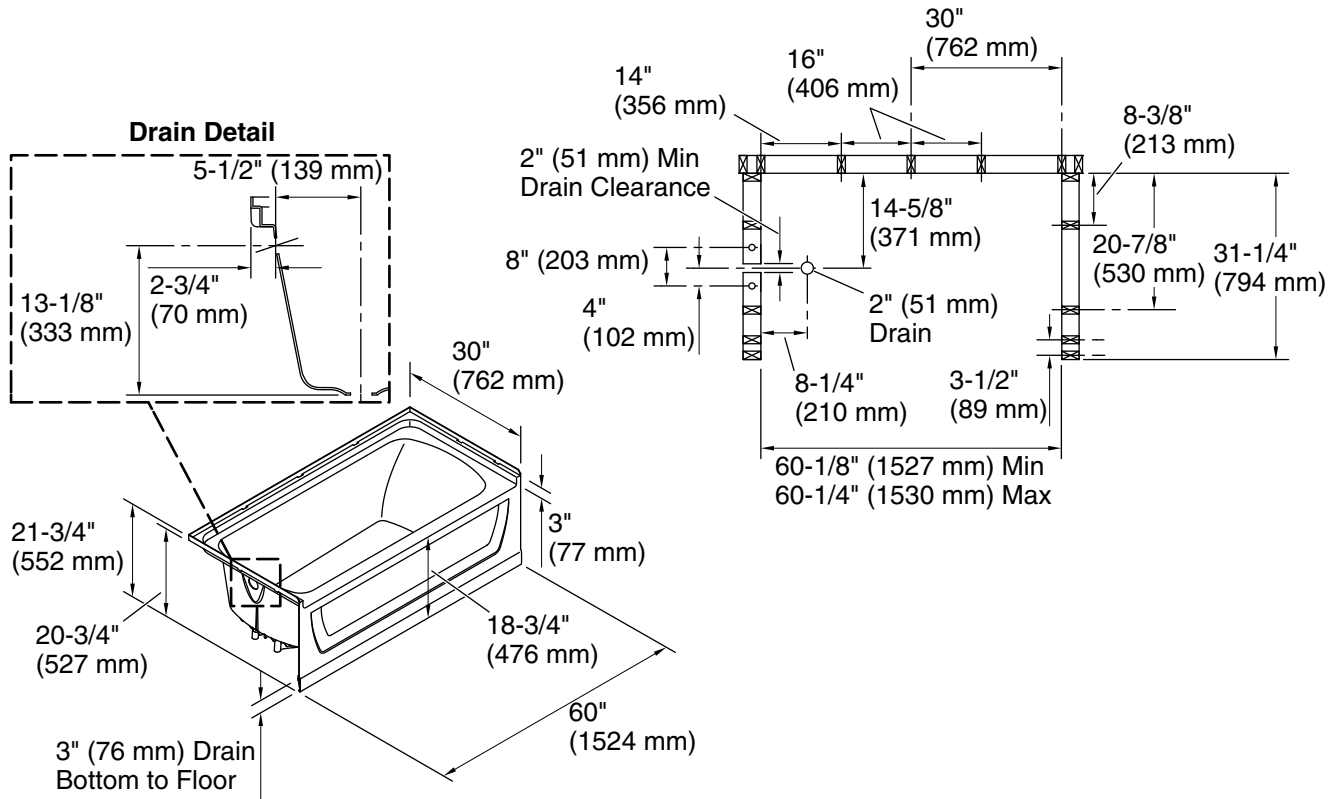

Technical Information

All product dimensions are nominal.

Drain location:	Left
Basin area, bottom:	45" x 20" (1143 mm x 508 mm)
Basin area, top:	53" x 23" (1346 mm x 584 mm)
Water depth:	11-1/4" (286 mm)
Water capacity:	44 gal (166.6 L)
Minimum flat for door:	2-3/4" (70 mm)
Maximum door width:	57-11/16" (1465 mm)

Notes

Install this product according to the installation instructions.

Studs should be positioned roughly as shown. Double studding is recommended for pivot shower door installations.

Felt pad not required for installation.

ADA, OBC compliant when installed to the specific requirements of these regulations.