



# Performa™ 2

60" x 29" Vikrell® alcove bath, left drain

## 71341810



### Features

- Durable high-gloss finish
- 15" (381 mm) bath depth (floor to top of threshold)
- Integral apron creates a clean, finished look
- Innovative 1/2" (12.7 mm) step flange provides superior water containment for installation with tile or Vikrell® wall sets
- Complements traditional and contemporary bathroom designs
- Compatible with 7134 Series Performa 2 wall sets

### Material

- Compression molded from our exclusive solid Vikrell® material

### Installation

- Alcove
- Left drain

### Recommended Products/Accessories

K-23726 Drain treatment  
K-23733 Vikrell® cleaner



ADA

### Codes/Standards

CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
ADA  
ICC/ANSI A117.1  
IAPMO Certification


### STERLING® Vikrell® or Acrylic Baths and Shower Bases Ten-Year Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

#### Color Code Description

|   |   |       |
|---|---|-------|
|  | 0 | White |
|---|---|-------|


1-800-STERLING (1-800-783-7546)

Kohler Co. reserves the right to make revisions without notice to product specifications.



For the most current Specification Sheet, go to [www.sterlingplumbing.com](http://www.sterlingplumbing.com).

12-26-2023 19:59 - US/CA/LM/MX

No change in measurements if connected with drain illustrated. (K-7213)



**Integral Flange Detail**

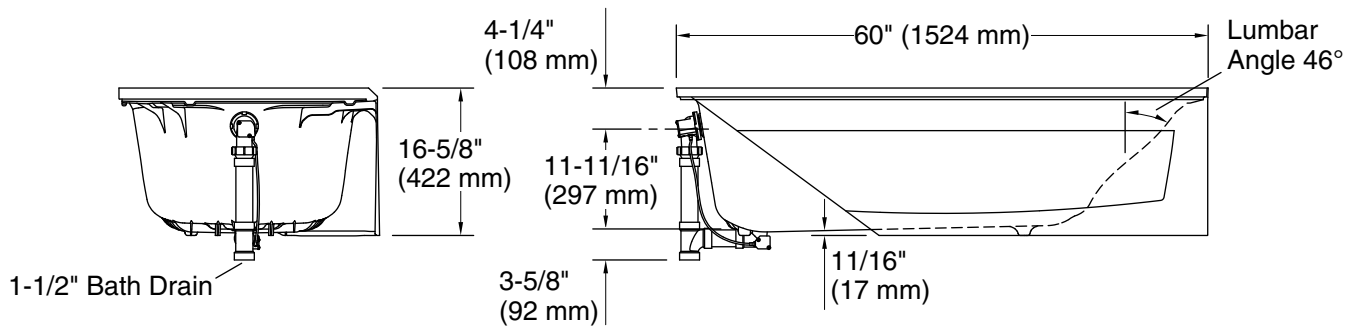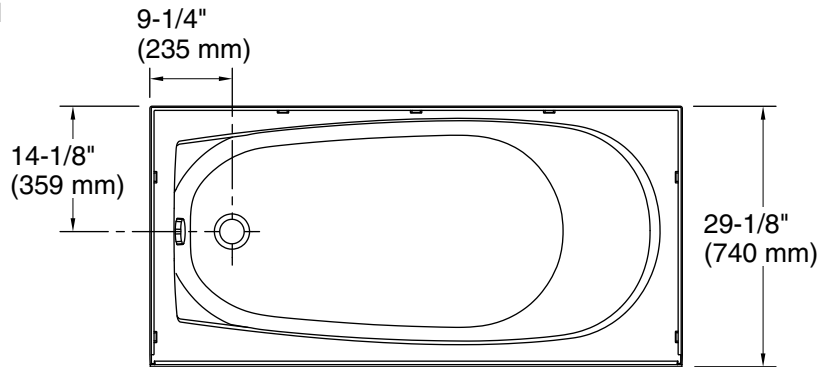

### Technical Information

All product dimensions are nominal.

|                        |                  |
|------------------------|------------------|
| Drain location:        | Left             |
| Weight:                | 45 lbs (20.4 kg) |
| Water depth:           | 9-3/4" (248 mm)  |
| Water capacity:        | 35 gal (132.5 L) |
| Minimum flat for door: | 1-7/16" (37 mm)  |

### Notes

Install this product according to the installation instructions.

Studs should be positioned roughly as shown.  
ADA compliant when installed to the specific requirements of these regulations.