

Features

- Durable high gloss finish.
- 60" (1524 mm) x 34" (864 mm) x 4-1/2" (114 mm) base finished dimensions.

Material

• Compression molded from our exclusive Vikrell® material.

Installation

۰ Suitable for tile down application or with STERLING wall surround.



60" Shower Base







Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 Greenguard UL 2818 - Gold HUD, UM Bulletin 73

STERLING[®] Warranty - Fixtures Made of Solid Vikrell Material

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color Code Description




0 White

96 **KOHLER Biscuit**





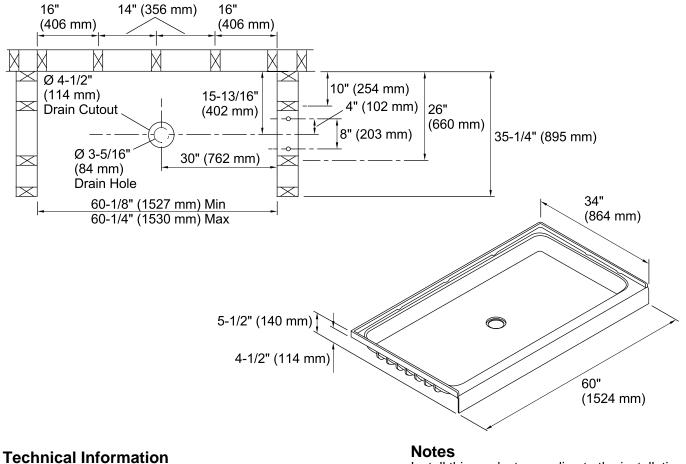

All product dimensions are nominal.Installation:3-Wall AlcoveDrain location:CenterMinimum flat for door:3" (76 mm)

Install this product according to the installation instructions.

Studs should be positioned roughly as shown.

Double studding is recommended for pivot shower door installations.