



Lawson™

72" Air Massage Bath

77301100



Features

- Compression molded from our exclusive solid Vikrell® material.
- Durable high-gloss finish.
- 3-speed blower with integrated 300 W heater, air switch control, and grounding-type plug-in cord.
- 29 air jets.
- Optional flange kit available for tile-in installation 71317100-NA.
- Optional flange kit provides continuous rim support and additional water containment benefits.
- 72" (1829 mm) x 36" (914 mm) x 20-5/16" (516 mm) unit rough-in dimensions include 5/16" (8 mm) tall nailing flange.
- 72" (1829 mm) x 36" (914 mm) x 20-5/16" (516 mm) complete unit finished dimensions.



Codes/Standards



ASME A112.19.7/CSA B45.10
CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
UL 1795
CSA 22.2 No. 218.2
Greenguard UL 2818 - Gold

STERLING® Warranty - Fixtures Made of Solid Vikrell Material

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	KOHLER Biscuit

USA/Canada: 1-800-STERLING (1-800-783-7546)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.sterlingplumbing.com.

7-18-2016 01:29

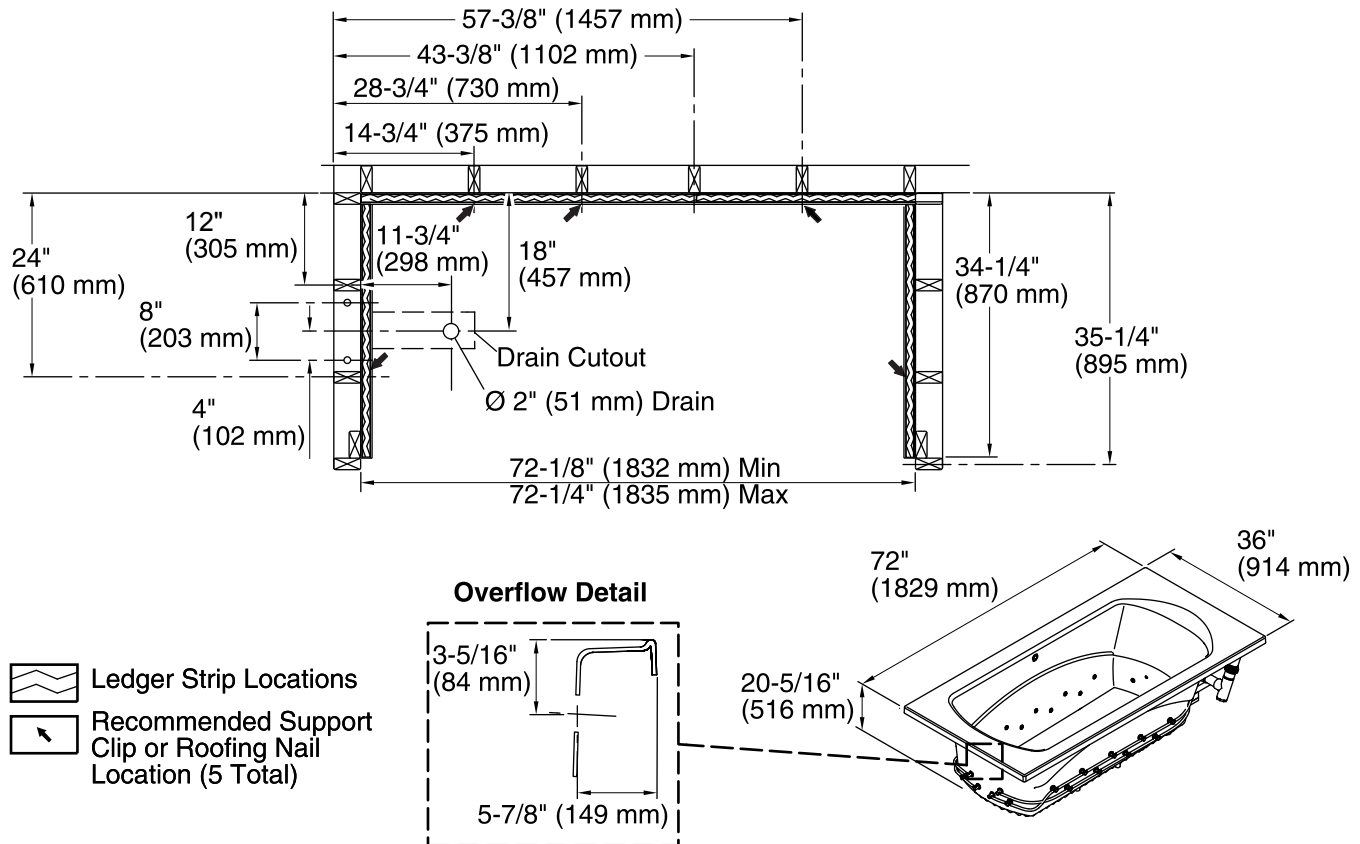

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Blower, Heater: 120 V, 15 A, 60 Hz

Technical Information

All product dimensions are nominal.

Installation: Drop-in
 Drain location: End
 Basin area, bottom: 50-3/8" x 21-3/4" (1280 mm x 552 mm)
 Basin area, top: 58-1/4" x 27" (1480 mm x 686 mm)
 Weight: 83 lbs (37.6 kg)
 Minimum floor load: 41 lbs/ft² (200.2 kg/m²)
 Water depth: 15-1/4" (387 mm)
 Water capacity: 68 gal (257.4 L)
 Electrical component rating: Blower: 120 V, 9.2 A, 60 Hz
 Heater: 300 W
 Minimum flat for door: 3" (76 mm)

Notes

Install this product according to the installation instructions.

Provide one grounded electrical outlet within 24" (610 mm) of each component.

Size the drain cutout to fit the drain assembly that will be used.

Blower service access is required.

End stud positioning is critical if nailing-in flanges are to be used.

Studs should be positioned roughly as shown for support clip or roofing nail installation.